


ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	512160600	2.0 WtB Rec Hsg 6Ckt	2	PC
C	593708000	2.0 WtB Crimp Rec Chn	12	PC
D	----	WHITE PART ID LABEL	1	PC

FROM	TO	DESCRIPTION	COLOUR
A1	B1	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	B2	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	B3	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	B4	1X22AWG DISC SR-PVC BK UL10002	BLACK
A5	B5	1X22AWG DISC SR-PVC BK UL10002	BLACK
A6	B6	1X22AWG DISC SR-PVC BK UL10002	BLACK

PART NUMBER	TITLE	L1	L2(REF)
2244821060	MicroTPA 2.0 R-R 6ckt 50mm disc Sn	50±5	15
2244821061	MicroTPA 2.0 R-R 6ckt 100mm disc Sn	100±5	15
2244821062	MicroTPA 2.0 R-R 6ckt 150mm disc Sn	150±5	15
2244821063	MicroTPA 2.0 R-R 6ckt 300mm disc Sn	300±5	15
2244821064	MicroTPA 2.0 R-R 6ckt 600mm disc Sn	600±5	15

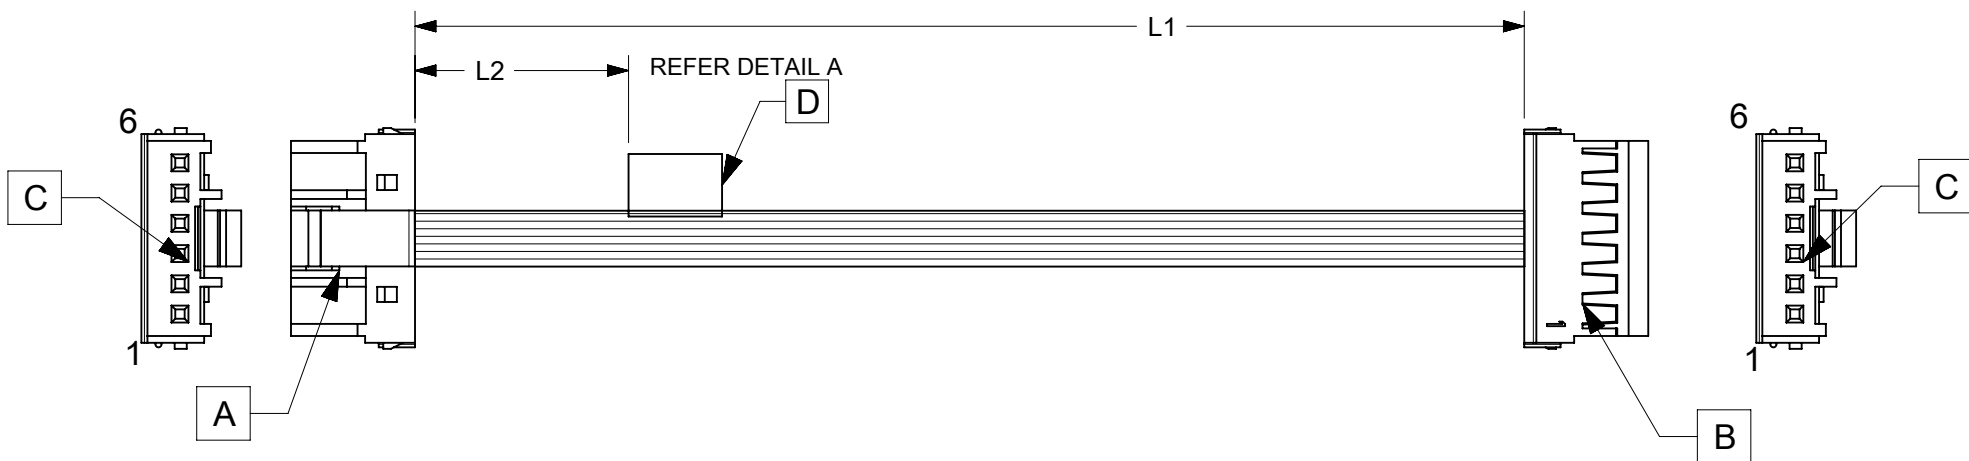

MOLEX P/N  
MOLEX  
BATCH WK/YR  
**DETAIL A**

- NOTES:
1. CABLE ASSEMBLY MUST PASS 100% CONTINUITY AND POLARITY TEST.
  2. CONNECTOR VIEW SHOWN FROM MATING SIDE.
  3. LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
  4. LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2023/01/04	A	INITIAL RELEASE	THANUB
DOCUMENT STATUS	P1	RELEASE DATE	2023/02/08 09:35:32

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
DIMENSION UNITS	SCALE	CURRENT REV DESC:
$\frac{F}{A} = 0$	mm	NTS
$\frac{F}{E} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)	
$\frac{F}{P} = 0$	ANGULAR TOL	± °
DIVISIONAL SYMBOLS	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	EC NO: 736615	
	DRWN: THANUB 2023/01/04	
	CHK'D: SKUMAR07 2023/02/08	
	APPR: SKUMAR07 2023/02/08	
	INITIAL REVISION:	
	DRWN: THANUB 2023/01/04	
	APPR: SKUMAR07 2023/02/08	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING
		SERIES
		MATERIAL NUMBER
		CUSTOMER
		SHEET NUMBER
	A4-SIZE	224482
	SEE TABLE	GENERAL MARKET
	2244821060	PSD 000 A
	SEE TABLE	1 OF 1