


Specifications :
 Voltagerating: 250V AC / DC
 Current rating: 5A AC / DC
 Withstanding voltage: 1000V AC/minute
 Temperature range: -40°C~+85°C
 Insulation resistance: ≥1000MΩ
 Contact resistance: ≤10mΩ
 After environmental testing: ≤20mΩ

C3030 T F-P XX X-X

- ① Series Number
- ② Category: T-terminal
- ③ Shape: F-Female Terminal
- ④ Material: P-Phosphorbronze
- ⑤ Plating style:
 G-Gold-Plated Contact
 *01-Gold Flash *15-15u" *30-30u"
 SN-Bright tin plating 70-120u"
- ⑥ Plating method:
 Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No.

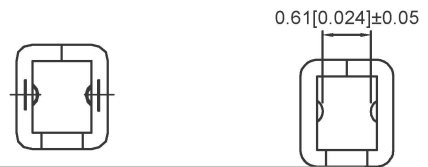

C3030TF-PG30	Phosphor Bronze	AWG#20-24	1.85 mm (Max)	Stamping Before Pating:30~50u" Ni;Contact Area Gold:30u" Min.	X3030HM
C3030TF-PG15				Stamping Before Pating:30~50u" Ni;Contact Area Gold:15u" Min.	
C3030TF-PG01				Stamping Before Pating:30~50u" Ni;Contact Area Gold Flash	
C3030TF-PSN				Stamping Before Plating:30~50u" Ni;70~120u"Sn	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used in XKB Housing

广东星坤科技股份有限公司

DETAIL C
SCALE: 1:1

生	日期						units: mm
ΔX							tolerance: X.X ±0.2mm
ΔX							X.XX ±0.1mm
ΔX							X.XXX ±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES		

DSND		DATE	SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE	VIEW:	PART NO.: 3.00 mm Crimp Style Connectors
CHKD		DATE	UNIT: mm/in	DWG NO.: C3030TF-PXXX
APPD		DATE	SIZE: A4	WEIGHT · SHEET · REVISION 1.0g · 1/1 · A0
XKB INDUSTRIAL PRECISION CO., LIMITED				

文件工程章