



Heyco® Ergonomic Plugs for Square Tubing

PSTE Series - Vinyl for Greater Flexibility

| TUBE DIMENSIONS Inside | | | | | PART NO. | DESCRIPTION | PART DIMENSIONS | | | |
|------------------------|---------|---------------|-------------------|---------|--------------|--------------|-----------------|------|-----|------|
| Dimension Range | | Typical Gauge | A | | | | B | | | |
| Minimum | Maximum | | Outside Dimension | | | | Depth | | | |
| in. | mm. | in. | mm. | | Black | in. | mm. | in. | mm. | |
| .58 | 14,7 | .68 | 17,3 | 14 - 20 | G5320 | PST E-75-14 | .75 | 19,1 | .43 | 10,9 |
| .73 | 18,5 | .83 | 21,1 | 10 - 14 | G5321 | PST E-100-10 | 1.00 | 25,4 | | |
| .83 | 21,1 | .93 | 23,6 | 14 - 20 | G5322 | PST E-100-14 | | | | |
| 1.08 | 27,4 | 1.18 | 30,0 | 14 - 20 | G5323 | PST E-125-14 | 1.25 | 31,8 | .52 | 13,2 |
| 1.23 | 31,2 | 1.33 | 33,8 | 10 - 14 | G5324 | PST E-150-10 | 1.50 | 38,1 | | |
| 1.33 | 33,8 | 1.43 | 36,3 | 14 - 20 | G5325 | PST E-150-14 | | | | |
| 1.73 | 43,9 | 1.83 | 46,5 | 14 - 20 | G5326 | PST E-200-10 | 2.00 | 50,8 | | |

Standard color black.

Heyco® Plugs for Rectangular Tubing

PZT Series - Ribbed Fit

| TUBE DIMENSIONS | | | | | | PART NO. | DESCRIPTION | PLUG | | |
|--------------------|------|-------------|---------|----------------|-----------------|--------------|-----------------|-------|-------|------|
| Outside Dimensions | | | | Wall Thickness | Typical Gauge | | | Black | Depth | C |
| A | | B | | | | | | | | |
| in. | mm. | in. | mm. | in. | | | | in. | mm. | |
| .50 | 12,7 | 1.00 | 25,4 | .065 - .049 | 16 - 18 | G5330 | PZT 50-100-16 | .43 | 10,9 | |
| | | 1.50 | 38,1 | .083 - .035 | 14 - 20 | G5331 | PZT 50-150-14 | .50 | 12,7 | |
| .63 | 15,9 | 1.12 | 28,6 | .083 - .035 | 14 - 20 | G5332 | PZT 63-112-14 | .43 | 10,9 | |
| | | 1.25 | 31,8 | .083 | 14 | G5334 | PZT 63-125-14 | .50 | 12,7 | |
| | | 1.38 | 34,9 | .083 - .035 | 14 - 20 | G5335 | PZT 63-138-14 | .43 | 10,9 | |
| .75 | 19,1 | 1.50 | 38,1 | .083 - .035 | 14 - 20 | G5336 | PZT 75-150-14 | .43 | 10,9 | |
| 1.00 | 25,4 | 1.25 | 31,8 | .083 - .035 | 14 - 20 | G5337 | PZT 100-125-14 | .50 | 12,7 | |
| | | 1.50 | 38,1 | .134 - .083 | 10 - 14 | G5338 | PZT 100-150-10 | | | |
| | | 2.00 | 50,8 | .083 - .035 | 14 - 20 | G5339 | PZT 100-150-14 | | | |
| | | | | .134 - .083 | 10 - 14 | G5340 | PZT 100-200-10 | | | |
| | | 2.50 | 63,5 | .083 - .035 | 14 - 20 | G5341 | PZT 100-200-14* | .36 | | 9,1 |
| | | | | .065 | 16 | G5342 | PZT 100-200-16 | | | |
| | | | | .083 - .035 | 14 - 20 | G5343 | PZT 100-250-14 | | | |
| 3.00 | 76,2 | .065 - .049 | 16 - 18 | G5344 | PZT 100-250-16 | | | | | |
| 1.50 | 38,1 | 2.00 | 50,8 | .083 - .035 | 14 - 20 | G5345 | PZT 100-300-14 | .51 | 13,0 | |
| | | 2.00 | 50,8 | .134 - .083 | 10 - 14 | G5346 | PZT 150-200-10 | .50 | 12,7 | |
| | | 2.50 | 63,5 | .109 - .065 | 12 - 16 | G5347 | PZT 150-250-12 | .53 | 13,5 | |
| | | 3.00 | 76,2 | .134 - .083 | 10 - 14 | G5348 | PZT 150-300-10 | .50 | 12,7 | |
| | | 3.50 | 88,9 | .134 - .083 | 10 - 14 | G5349 | PZT 150-350-10 | .60 | 15,2 | |
| 1.96 | 49,8 | 3.94 | 100,1 | .203 - .109 | 6 - 12 | G5356 | PZT 196-394-06M | .65 | 16,5 | |
| 2.00 | 50,8 | 2.50 | 63,5 | .134 - .083 | 10 - 14 | G5351 | PZT 200-250-10 | .52 | 13,2 | |
| | | 3.00 | 76,2 | .203 - .165 | 6 - 8 | G5352 | PZT 200-300-06 | | | |
| | | | | .134 - .083 | 10 - 14 | G5353 | PZT 200-300-10 | | | |
| | | 4.00 | 101,6 | .083 - .035 | 14 - 20 | G5354 | PZT 200-300-14 | .50 | | 12,7 |
| | | | | .203 - .120 | 6 - 11 | G5355 | PZT 200-400-06 | .94 | | 23,9 |
| | | | | .134 - .083 | 10 - 14 | G5357 | PZT 200-400-10 | .50 | | 12,7 |
| | | .083 - .035 | 14 - 20 | G5358 | PZT 200-400-14 | | | | | |
| | | 5.00 | 127,0 | .165 | 8 | G5359 | PZT 200-500-08* | 1.00 | | 25,4 |
| .134 | 10 | | | G5360 | PZT 200-500-10* | | | | | |


Standard color black.

*Smooth (ie, not ribbed) shank.


| | | | |
|-------------------|--|-------------------|----------------------------------|
| Material | PSTE | Material | LDPE |
| Temperature Range | Vinyl 26°F (-32°C) to 200°F (93°C) | Temperature Range | -94°F (-70°C) to 150°F (66°C) |



- **Flexible, ribbed design** allows quick and easy fingertip installation.
- **Removable without the use of tools** (Traditional glides and tube plugs are designed to be permanent. Their rigid design makes removal very difficult).
- Injection molded for intricate detail and design, with **flexibility**.
- See page 6-50 for HEYCaps and Plugs for Round Tubing.
- Material: Vinyl. Vinyl **decreases mobility** or sliding on floors, helping to keep your application in place.

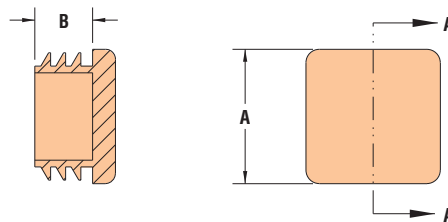

- Featuring the same external rib design of Heyco PSTR Series Plugs for Square Tubing, PZT Series Plugs for Rectangular Tubing are offered in a **broad selection of width-to-length proportions**, to fit many special tubing shapes found on stands for computer terminals, office machines, display fixtures, and similar metal furnishings and equipment.
- **Durable construction** ensures exceptional performance in business and commercial applications.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Heyco:

[G5343](#) [G5354](#) [G5332](#) [G5357](#) [G5344](#) [G5355](#) [G5323](#) [G5337](#) [G5347](#) [G5338](#) [G5352](#) [G5336](#) [G5339](#) [G5349](#)
[G5345](#) [G5342](#) [G5346](#) [G5322](#) [G5334](#) [G5359](#) [G5353](#) [G5321](#) [G5358](#) [G5335](#) [G5341](#) [G5360](#) [G5320](#) [G5326](#)
[G5340](#) [G5351](#) [G5324](#) [G5348](#) [G5330](#) [G5325](#) [G5356](#) [G5331](#)