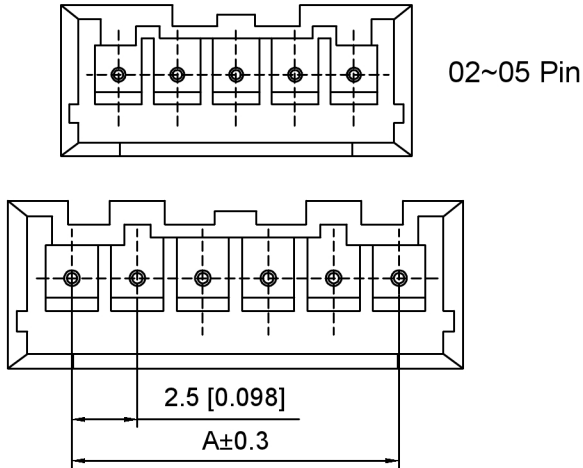
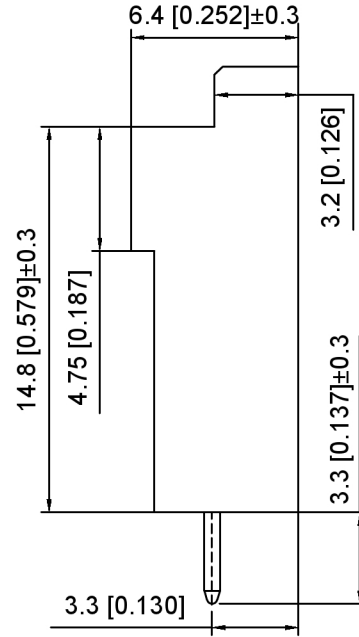
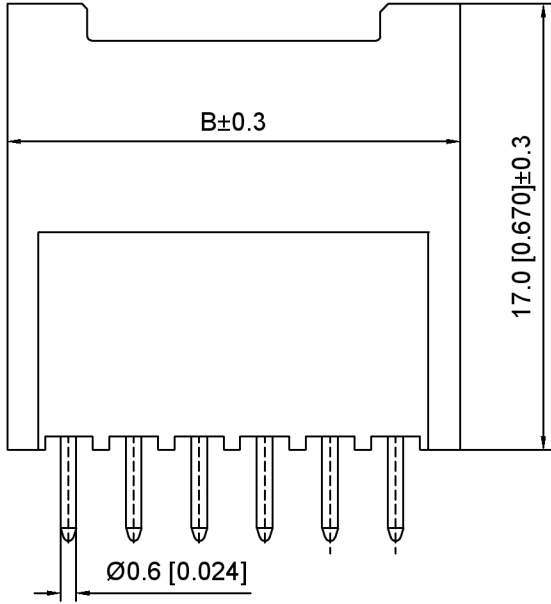


PCB Layout

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-40℃~+125℃

温度范围: -40℃~+125℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

X2508 W V - XX J - N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

1. Series No
2. Category:W-Wafer
3. Welding Board Range:V-Stright 180°
4. Row No.Pin No:XX-02~15 Pin
5. Special No:J-Ordinary plus long
6. Material:N0-Nylon 66 UL94V-0
7. Plating:SN-Plated Tin

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	7.50	09	20.00	25.00
03	5.00	10.00	10	22.50	27.50
04	7.50	12.50	11	25.00	30.00
05	10.00	15.00	12	27.50	32.50
06	12.50	17.50	13	30.00	35.00
07	15.00	20.00	14	32.50	37.50
08	17.50	22.50	15	35.00	40.00

X2508WV-XXJ-N0SN	Nylon 66	Brass	X2508H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	2.5mm Crimp Style Connector
CHKD		UNIT: mm/in	PART NO.: X2508WV-XXJ-N0SN
APPD		SIZE: A4	DWG NO.: X-X2508WV-XXJ-N0SN
		WEIGHT	SHEET
			1/1
		REVISION	A0

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

Δx	Δx	Δx	MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°
								L≤ 4	±0.2
								4<L≤ 16	±0.3
								16<L≤ 63	±0.4
								L> 63	±0.5
REVISIONS								UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn									