


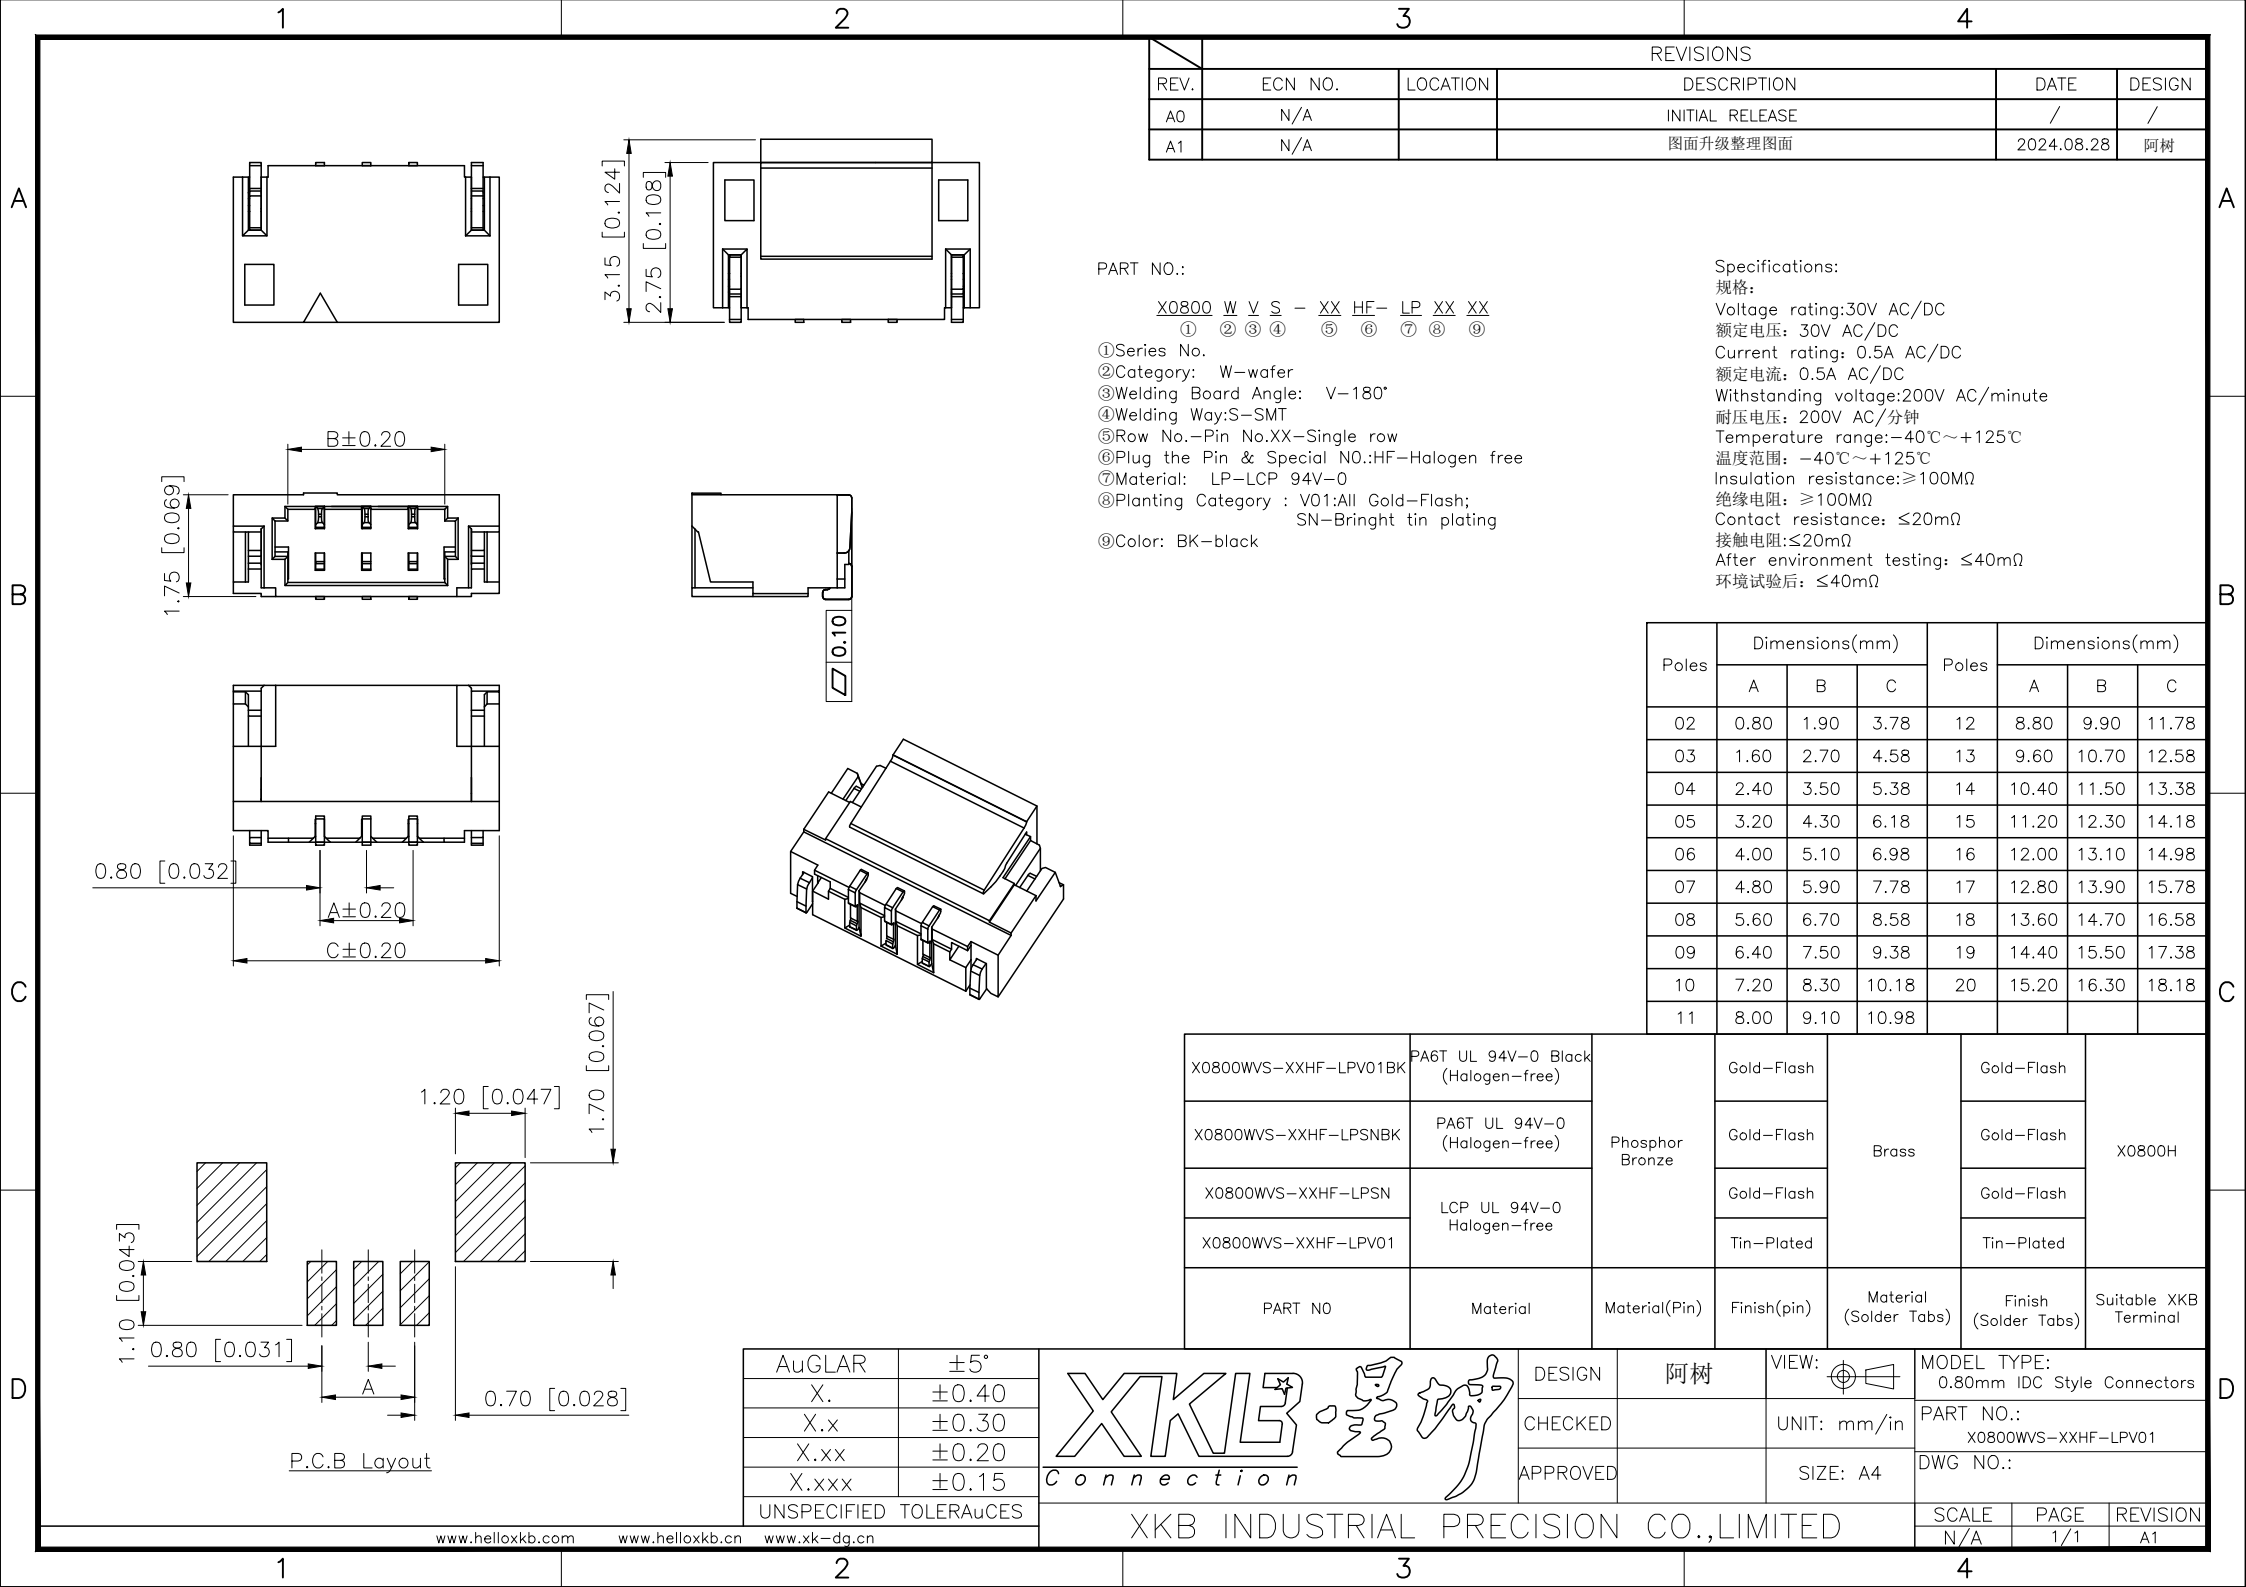

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.08.28	阿树

PART NO.:

X0800 W V S - XX HF- LP XX XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ①Series No.
②Category: W-wafer
③Welding Board Angle: V-180°
④Welding Way:S-SMT
⑤Row No.-Pin No.XX-Single row
⑥Plug the Pin & Special NO.:HF-Halogen free
⑦Material: LP-LCP 94V-0
⑧Planting Category : V01:All Gold-Flash;
SN-Bright tin plating
⑨Color: BK-black

Specifications:

规格:
Voltage rating:30V AC/DC
额定电压: 30V AC/DC
Current rating: 0.5A AC/DC
额定电流: 0.5A AC/DC
Withstanding voltage:200V AC/minute
耐压电压: 200V AC/分钟
Temperature range:-40℃~+125℃
温度范围: -40℃~+125℃
Insulation resistance:≥100MΩ
绝缘电阻: ≥100MΩ
Contact resistance: ≤20mΩ
接触电阻: ≤20mΩ
After environment testing: ≤40mΩ
环境试验后: ≤40mΩ

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.90	3.78	12	8.80	9.90	11.78
03	1.60	2.70	4.58	13	9.60	10.70	12.58
04	2.40	3.50	5.38	14	10.40	11.50	13.38
05	3.20	4.30	6.18	15	11.20	12.30	14.18
06	4.00	5.10	6.98	16	12.00	13.10	14.98
07	4.80	5.90	7.78	17	12.80	13.90	15.78
08	5.60	6.70	8.58	18	13.60	14.70	16.58
09	6.40	7.50	9.38	19	14.40	15.50	17.38
10	7.20	8.30	10.18	20	15.20	16.30	18.18
11	8.00	9.10	10.98				

X0800WVS-XXHF-LPV01BK	PA6T UL 94V-0 Black (Halogen-free)	Phosphor Bronze	Gold-Flash	Brass	Gold-Flash	X0800H
X0800WVS-XXHF-LPSNBK	PA6T UL 94V-0 (Halogen-free)		Gold-Flash		Gold-Flash	
X0800WVS-XXHF-LPSN	LCP UL 94V-0 Halogen-free		Gold-Flash		Gold-Flash	
X0800WVS-XXHF-LPV01			Tin-Plated		Tin-Plated	
PART NO	Material	Material(Pin)	Finish(pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	0.80mm IDC Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X0800WVS-XXHF-LPV01
APPROVED		SIZE:	A4	DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1