


**THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS**


1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:  
a - As supplied      b - After unrestricted recovery
3. Weight shown in table of dimensions is based on polyolefin part.

NOTES

If this document is printed it becomes uncontrolled.  
Check for the latest revision.

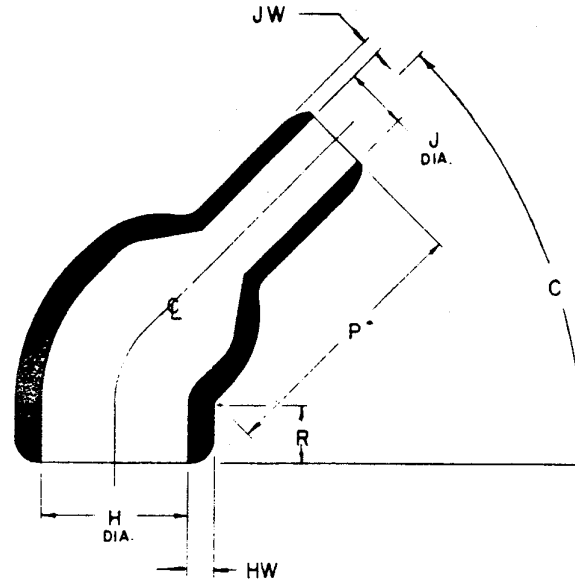

AS SUPPLIED



AFTER UNRESTRICTED RECOVERY

ORDERING INFORMATION

Matl No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
3	Polyolefin	RT 301	1.40

Add material number as suffix to part number;  
Example - Order 243A022-3 when polyolefin is required.

**TABLE OF DIMENSIONS**

PART NO.	H		J		P		R		HW		JW		C		Weight lbs ±10%	This Boot Fits	
	Min a	Max b	Min a	Max b	a	±10% b	a	±10% b	Max a	±20% b	Max a	±20% b	±10° a	±5° b		MIL-C-5015 Shell Size	MIL-C-26482 Shell Size
243A022-3-02	1.10	.70	.79	.22	-	1.07	-	.38	.11	.11	.075	.075	45	45	.015	145, 165	12, 14

**Raychem**

E O REV DATE DESCRIPTION

DRN: JLW  
CHK D: JMF  
AUTH: JSC  
AUTH: DDR

PART DESCRIPTION  
BOOT, 45°, THICK WALL

PART NO. 243A022-3-02  
REV LTR  
DATE MARCH 16, 1983