

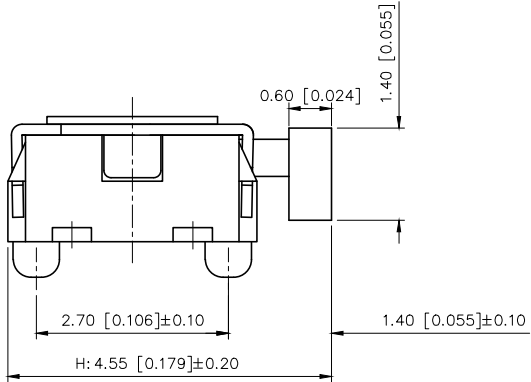
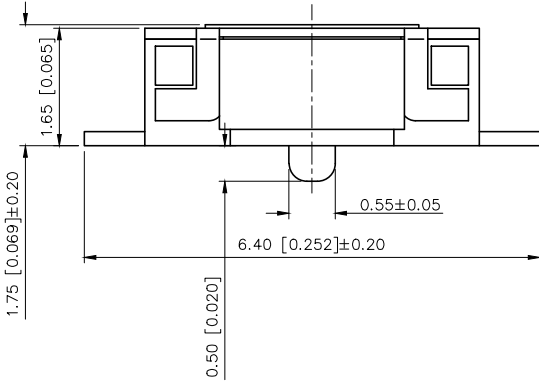
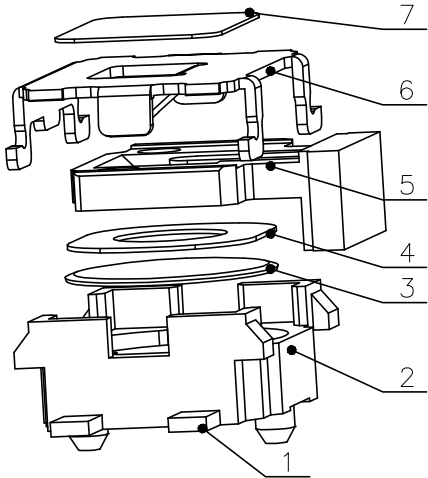
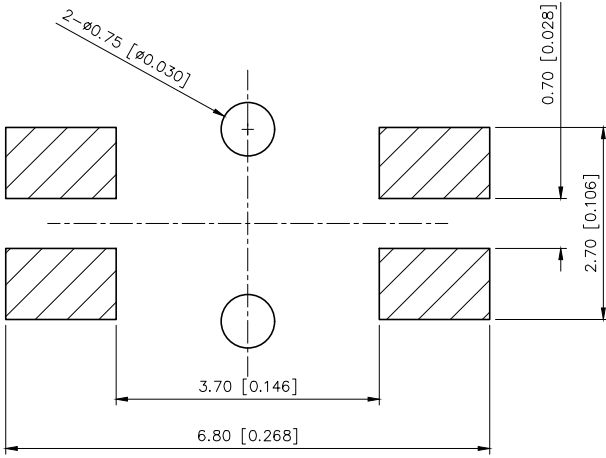


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.18	阿树

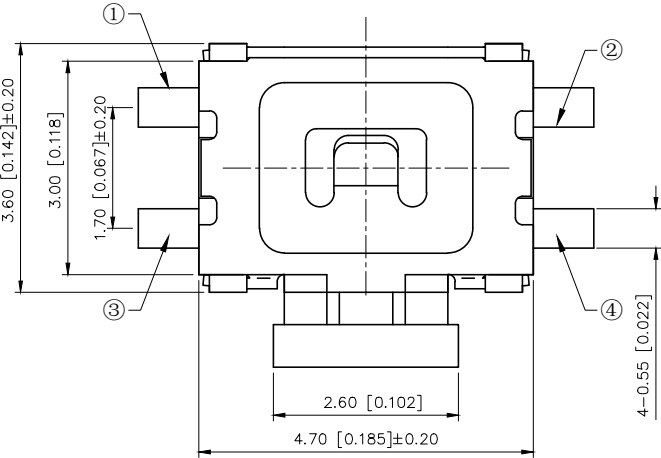

SPECIFICATION
1.Rating:DC 12V 50mA Max
2.Contact resistance: 100mΩ MAX
3.Insulation resistance: 100MΩ Min
4.Dielectric strength: 250VAC/min
5.Operating force: 260gf±50gf
6.Operating life: 100,000 cycles
7.Travel: 0.20+0.10mm

PAPT NO	TA-1186D-X-X
Operating Force	B:160gf C:260gf
Height	H: 4.5
Fixed column	A: With B: Without



CIRCUIT DIAGRAM

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	UNIT: mm/in
SIZE: A4	

MODEL TYPE:	TACT SWITCH
PART NO.:	TS-1186D-X-X
DWG NO.:	