


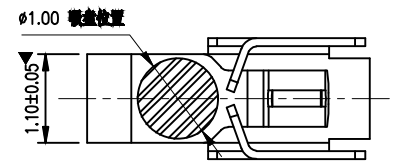


SAMZO REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12

- Technical Requirements:
1. Material: Stainless steel SUS301, T = 0.15 ± 0.005;
 2. Burrs are not allowed on the soldering surface and contact surface of the terminal tin feet, and the maximum burr on other parts is 0.03mm;
 3. Twist: 45°/1000mm, arch 5mm/1000mm;
 4. The dimensions marked with "▼" symbol are key control and inspection dimensions;
 5. Unmarked R MAX R0.13;
 6. The electroplating must pass the 48-hour salt spray test;
 7. The life test is > 20,000 times, and the product elasticity is required to be between 60gf - 80gf
 8. The nickel base is 50 - 80 U" min. The soldering area is gold-plated, and the contact area is gold-plated 3 U" min.

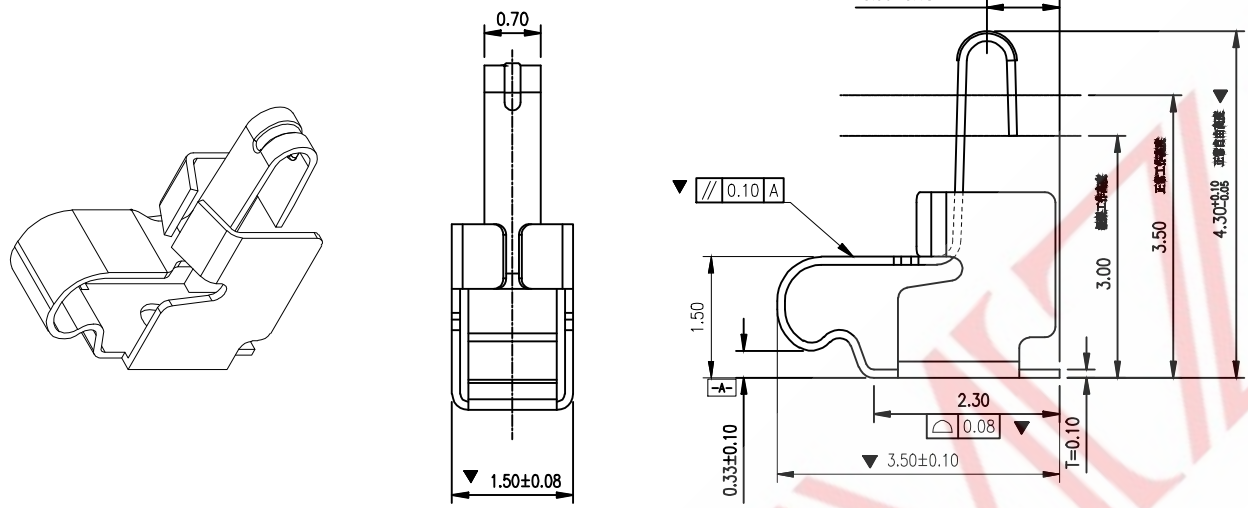

RF 35 15 43 - T J R

Mould Code: R-Conventional
 Coating: Gold Plating
 Material: SUS301-T010
 Height: H 4.3mm
 Width: W 1.5mm
 Length: L 3.5mm
 Series: Antenna Spring

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR	FIRST VIEW					
A	本体	SUS301-T0.10mm	1	镀金3U						
					GENERAL TOLERANCE					
					≥0~2<	±0.15	SCALE	1:1	UNIT	mm
					DESIGN	WANGGUIFA	2018.06.12	SAMZO COMPONENTS		
					CHECKED	ZHENGUILAN	2018.06.12	Electronic switch and connector manufacturer		
					APPROVED	LILIANJIANG	2018.06.14			
					≥2~5<	±0.25				
					≥0~2<	±0.15				
					≥5	±0.35				

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
 WWW.KKK-JP.COM

TITLE: RF Antenna Spring,SMT, (L3.5*W1.5*H2.5mm)
 DWG NO: RF3515-P004
 PART NO: RF35151104
 MODEL NO: RF351543-TJR
 NAME: RF SPRING