


HSF RoHS  us **CE**

SPECIFICATIONS

Rated(额定参数): 300V,20A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Screw Torque(扭矩): 0.5Nm (4.4l.b.in)
 Wire Range(线径):1.4~2.2AWG
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s


Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Brass, Tin plating(黄铜镀锡)
 Screw (螺丝): M3.0, Steel, Ni plating(钢,镀锌)

PITCH RANGE IN MM	NOMINAL DIMENSION RANGE IN MM				
	OVER TO	OVER TO	OVER TO	OVER TO	OVER TO
6	10	30	60	100	OVER
10	24	30	60	100	150
±0.10	±0.15	±0.25	±0.30	±0.50	±0.70
					±1.00




Ordering Information

JL850B - 850 XX X X 1

Pitch 850=8.5PH
 No.of pins 2P~24P
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 F=Grey
 Packing
 O=Pe bog
 T=Tube
 A=Troy

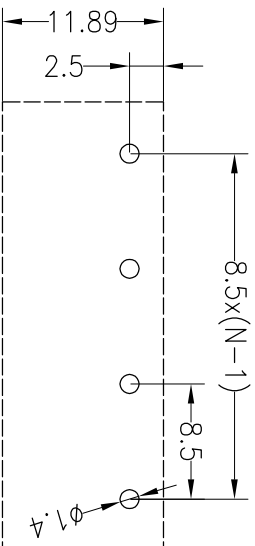

Recommended P.C.B Layout

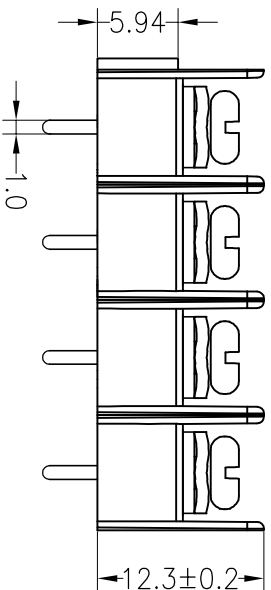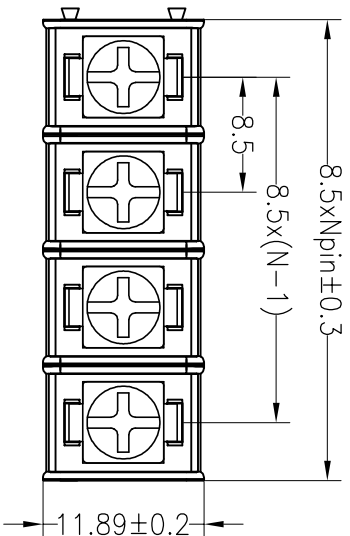

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	Yyusheng	18.10.07	UNIT	mm	A4	1/1	PART NO. JL850B-850XXXX1	
X.XX	±0.20	CHECK		SIZE	A4			8.5mm Terminal Blocks Female	
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL	CHANGE							
1	2	3	4	5	6	7	8	9	
REV	DATE	MODIFICATION DESCRIPTION							
A0	2018.10.07	NEW DRAWING							

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992