

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 5A

2. Withstanding voltage : AC1250V/1Min.

3. Wire range : 30~20AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

2. Wire range : 0.2~0.5mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 2.54mm, Poles : N=04~48P

3. Stripping length : 7~8mm

4. Operating temperature: -40°C~+105°C







5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm		Tolerance
	Over	Under	
6 TO 10	10 TO 24	30 TO 60	0.1/10
±0.15	±0.20	±0.30	±2°
		±0.50	
		±0.70	
		±1.00	
		±1.30	

6. RoHS Compliance

### Ordering Information

**JL15EDGKDH-254 XX B 0 1**

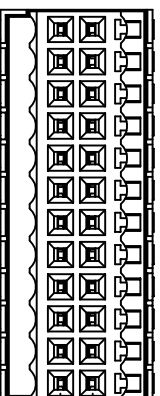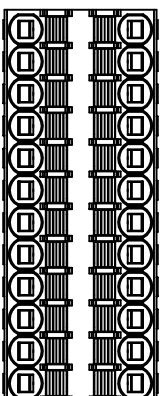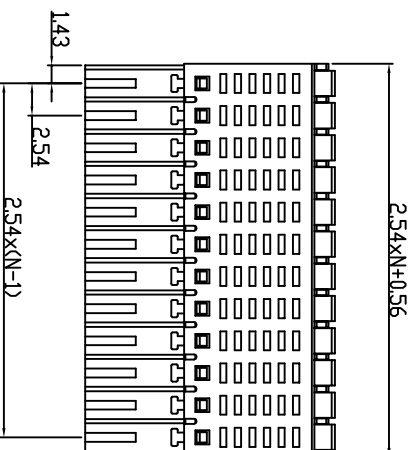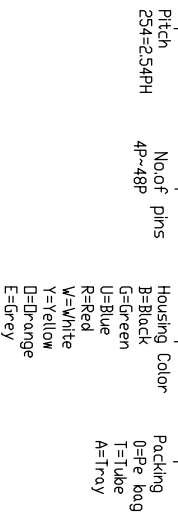

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		NEW		22.3.3
B		按实物修改字符	Z.S.P	22.4.8

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	TITLE:
	CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLIANG GAO		SIZE	A4		
			SHEET	1/1		
			PRD.J.			JL15EDGKDH-2.54-2XNP插拔式母座黑色

**JILIN** 东莞市锦凌电子有限公司  
DONGGUAN JINLING ELECTRONIC CO., LTD