
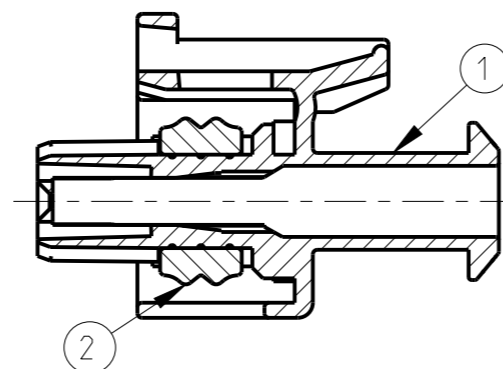
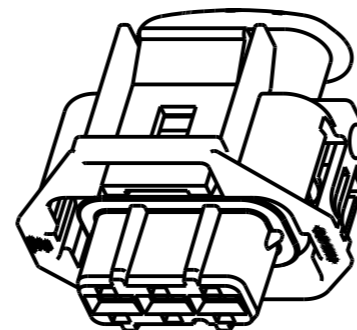


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	16MAR09	NZ	KO
	A1	ECR-20-009580	10JUL20	S.C	I.Y
	A2	ECR-21-006044	18JUN21	K.Z	J.Z

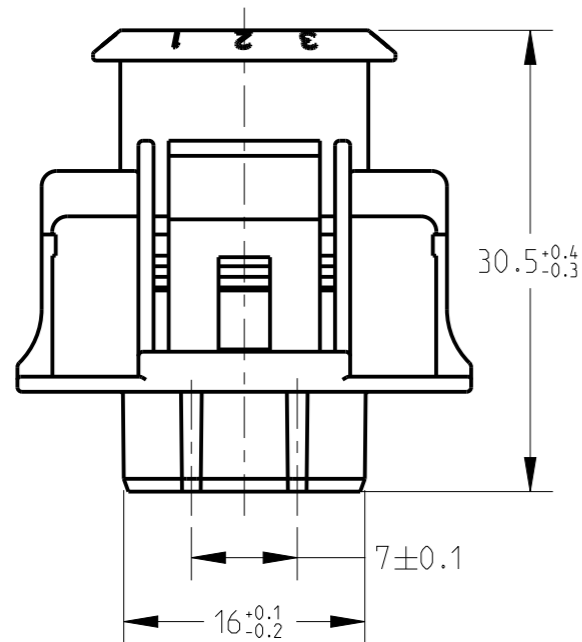

SECTION A-A

NOTES:



1. CODING IS AS FOLLOWS; SEE TABLE 1.

2. APPLIED RECEPTACLE CONTACT P/N:

DESCRIPTION	2.8mm SENSOR-FLAT RECEPTACLE OR EQUIVALENT	
PART NO.	967542 OR EQU.	967543 OR EQU.
WIRE SIZE	0.5~1.0	>1.0~2.5

3. APPLIED WIRE SEAL P/N:

DESCRIPTION	SINGLE-WIRE SEAL (5mm HOLE)	
PART NO.	828904	828905
INSULATION DIA.(Ø)	1.2~2.1mm	2.2~3.0mm

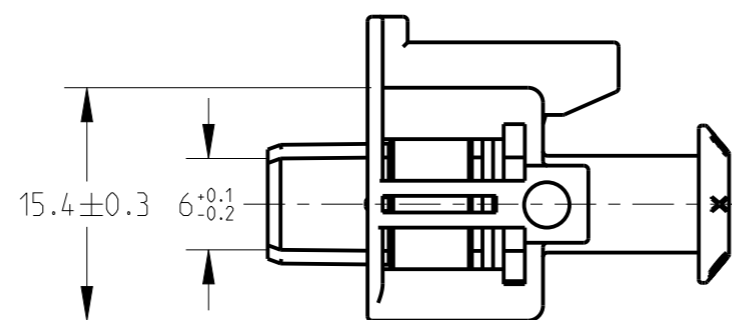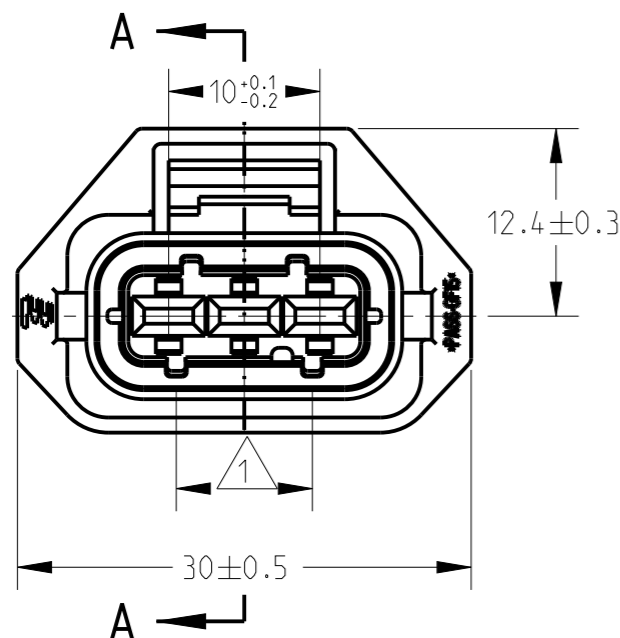




(TABLE 1)

CODE I	2050049-1/3	CODE II	2050049-2

1	1	1	PC	ORANGE	SILICON	INNER SEAL	2
1			PC	BLUE	PA66 GF15	PLUG (CODE I)	1
	1		PC	BLACK	PA66 GF15	PLUG (CODE II)	1
		1	PC	BLACK	PA66 GF15	PLUG (CODE I)	1
-3	-2	-1	U/M	COLOR	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FY.YAN 14APR08	TE Connectivity																			
DIMENSIONS: mm		CHK W.YUAN 30MAY08																				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K.ODA 16JUN08	NAME 3P PLUG ASSEMBLY (FLAT SENSOR CONNECTOR)																			
<table border="1"> <tr> <td>0 PLC</td> <td>±</td> <td>±0.30</td> </tr> <tr> <td>1 PLC</td> <td>±0.5</td> <td></td> </tr> <tr> <td>2 PLC</td> <td>±0.13</td> <td></td> </tr> <tr> <td>3 PLC</td> <td>±0.013</td> <td></td> </tr> <tr> <td>4 PLC</td> <td>±0.0001</td> <td></td> </tr> <tr> <td>ANGLES</td> <td>±</td> <td></td> </tr> </table>		0 PLC	±	±0.30	1 PLC	±0.5		2 PLC	±0.13		3 PLC	±0.013		4 PLC	±0.0001		ANGLES	±		PRODUCT SPEC 108-101133-1	SIZE A3	
0 PLC	±	±0.30																				
1 PLC	±0.5																					
2 PLC	±0.13																					
3 PLC	±0.013																					
4 PLC	±0.0001																					
ANGLES	±																					
MATERIAL SEE TABLE		APPLICATION SPEC -	CAGE CODE 00779	DRAWING NO C=2050049																		
FINISH ±2°		WEIGHT -	RESTRICTED TO																			
finish_spec_2		RESTRICTED CUSTOMER	SCALE 1:1	SHEET 1 OF 2																		
			REV A2																			

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

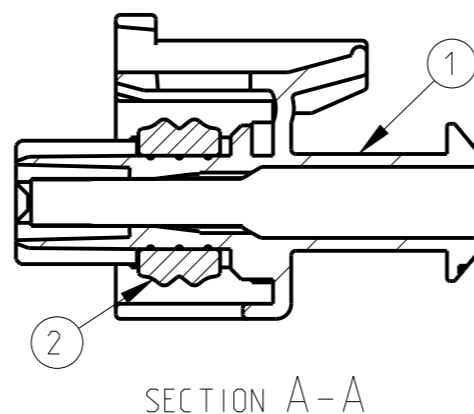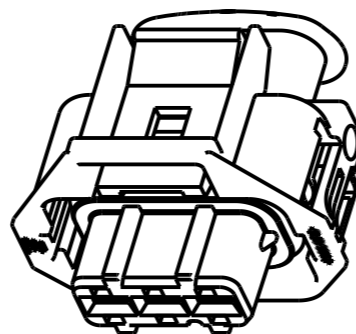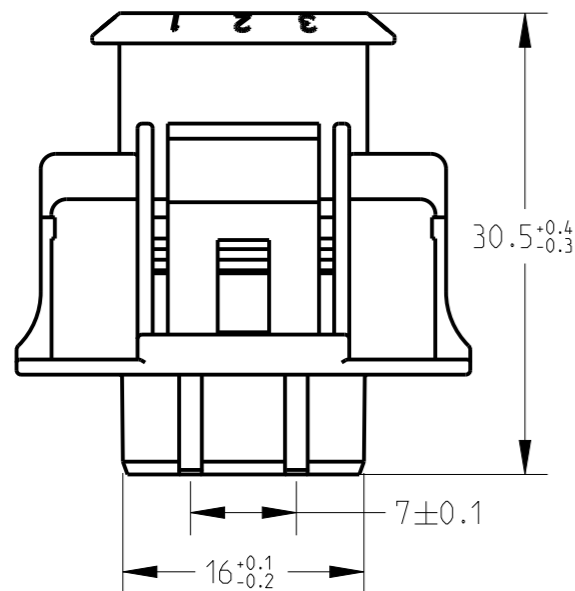

NOTES:

1. CODING IS AS FOLLOWS; SEE TABLE 1.




2. APPLIED RECEPTACLE CONTACT P/N:

DESCRIPTION	2.8mm SENSOR-FLAT RECEPTACLE OR EQUIVALENT	
PART NO.	967542 OR EQU.	967543 OR EQU.
WIRE SIZE	0.5~1.0	>1.0~2.5

3. APPLIED WIRE SEAL P/N:

DESCRIPTION	SINGLE-WIRE SEAL (5mm HOLE)	
PART NO.	828904	828905
INSULATION DIA.(Ø)	1.2~2.1mm	2.2~3.0mm

(TABLE 1)

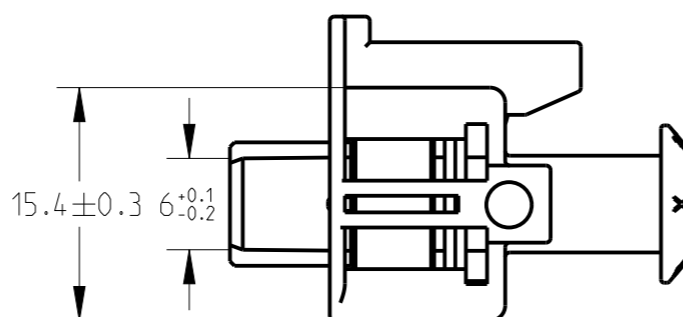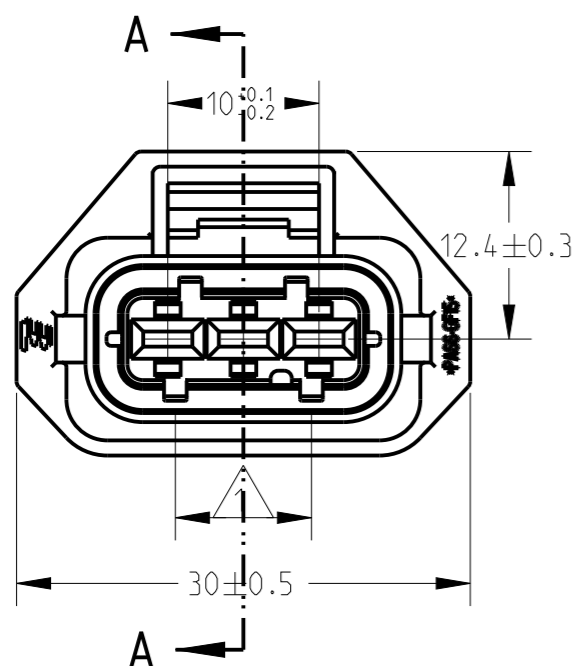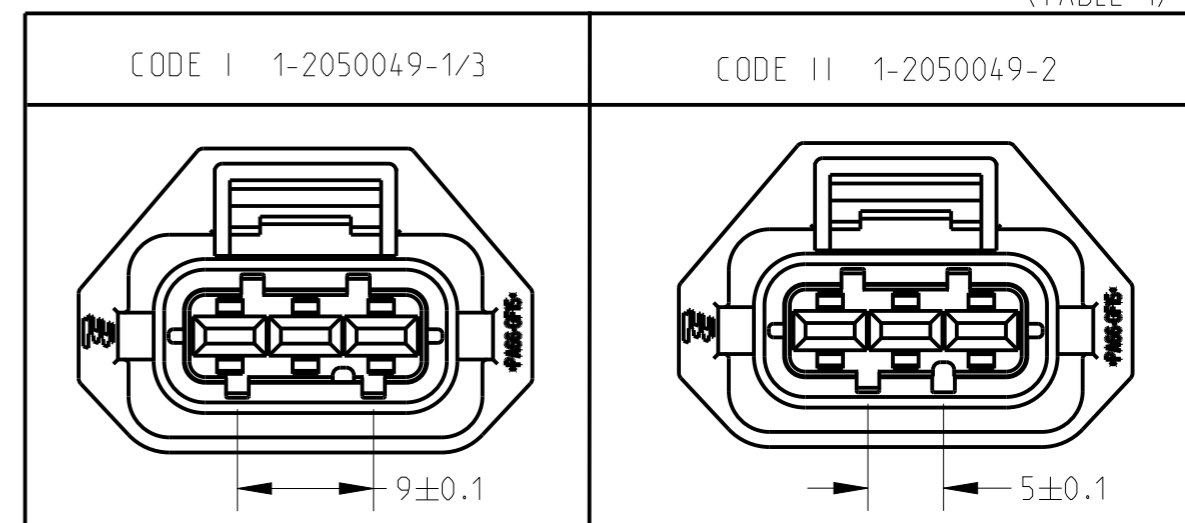

1	1	1	PC	ORANGE	SILICON	INNER SEAL	2
1			PC	BLUE	PA66 GF15	PLUG (CODE I)	1
	1		PC	BLACK	PA66 GF15	PLUG (CODE II)	1
		1	PC	BLACK	PA66 GF15	PLUG (CODE I)	1
1-3	1-2	1-1	U/M	COLOR	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.ZHOU 18JUN21																				
DIMENSIONS: mm		CHK T.DONG 18JUN21																				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.ZONG 18JUN21	NAME 3P PLUG ASSEMBLY (FLAT SENSOR CONNECTOR)																			
<table border="1"> <tr> <td>0 PLC</td> <td>±</td> <td>±0.30</td> </tr> <tr> <td>1 PLC</td> <td>±0.5</td> <td></td> </tr> <tr> <td>2 PLC</td> <td>±0.13</td> <td></td> </tr> <tr> <td>3 PLC</td> <td>±0.013</td> <td></td> </tr> <tr> <td>4 PLC</td> <td>±0.0001</td> <td></td> </tr> <tr> <td>ANGLES</td> <td>±</td> <td></td> </tr> </table>		0 PLC	±	±0.30	1 PLC	±0.5		2 PLC	±0.13		3 PLC	±0.013		4 PLC	±0.0001		ANGLES	±		PRODUCT SPEC 108-101133-1	SIZE A3	
0 PLC	±	±0.30																				
1 PLC	±0.5																					
2 PLC	±0.13																					
3 PLC	±0.013																					
4 PLC	±0.0001																					
ANGLES	±																					
MATERIAL SEE TABLE		APPLICATION SPEC -	CAGE CODE 00779	DRAWING NO C=2050049																		
FINISH ±2°		WEIGHT -	RESTRICTED TO																			
-		RESTRICTED CUSTOMER	SCALE 1:1	SHEET 2 OF 2																		
-		finish_spec_2	REV A2																			