


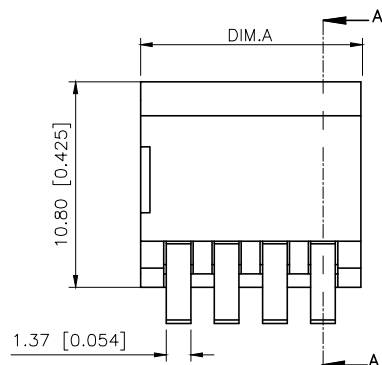

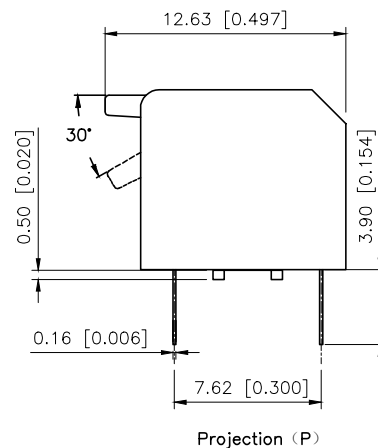


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.21	阿树

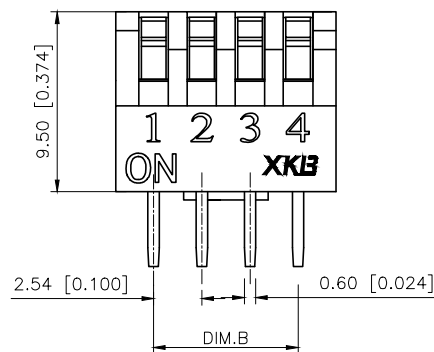


SECTION A-A

CIRCUIT



Short (S)

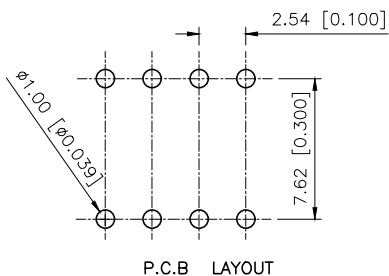

SPECIFICATION

Contact Rating: 25mA,24V DC
Contact Resistance: 50mΩ max
Insulation Resistance: 100MΩ min.500V DC
Dielectric Strength: 500V AC/1minute
Operating Force: 1000gf max
Travel: 2mm
Operating Life: 3000cycles
Operating Temp: -20℃~+70℃
Storage Temp: -30℃~+80℃

4	Terminal		Copper Alloy	T:tin plated G:Plating Gold≥15MIU
3	Base	1	Pa66	Black
2	Keystake	1	Pa66	White
1	Cover	1	Pa66	Black Blue Red
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	DIP SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	DPL-XX-X-X
APPROVED		SIZE:	A4	DWG NO.:	