

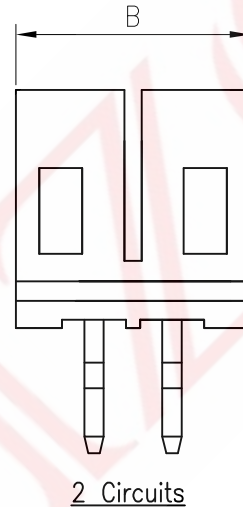
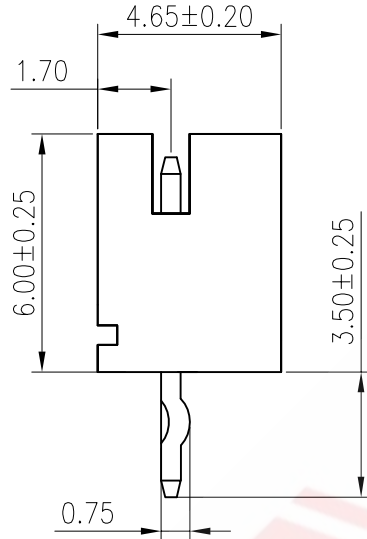


1 2
SAMZO REAC/ROHS

6		7		8	
REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2013.06.21

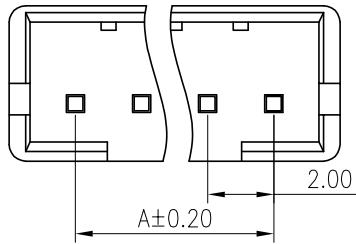


- ◆ SPECIFICATIONS
- Current rating: 2A AC, DC
 - Voltage rating: 125V AC, DC
 - Temperature range: -25°C ~ +85°C
 - Insulation resistance: 1000MΩ Min.
 - Withstanding voltage: 800V AC/ minute.
 - Contact resistance: 20mΩ Max.

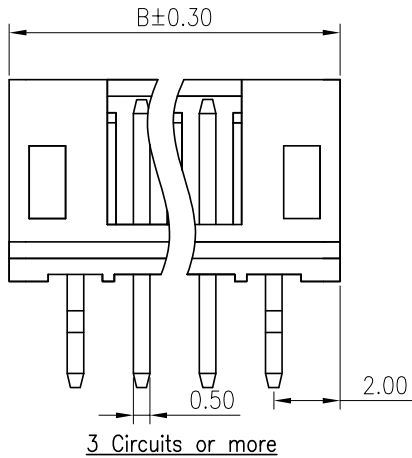

PART No.	Dimension	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

A. SERISE: 5F-PH
 B. SPACING: K-2.00mm
 C. MOUNTING: A-LD
 D. STANDARD: A-WAFER
 E: PIN: 02-2P (02-16P)
 F: CODE: 0-PBT/1-PA6T
 G: L PIN/K PIN

5FKAA ****
 A B C D E F G

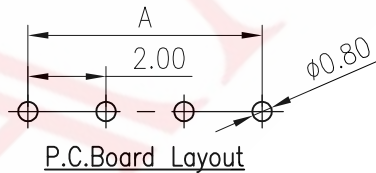

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR					
1	引脚	黄铜	N	镀锡					
2	主体	PBT/PA6T	1	白色/高温料					
							GENERAL TOLERANCE		
							≥0~2<	±0.15	
							DESIGN	WANGGUIFA	2018.06.12
							≥2~5<	±0.25	
							CHECKED	ZHENGUILAN	2018.06.12
							≥0~2<	±0.15	
							APPROVED	LILIANJIANG	2018.06.14
							≥5	±0.35	

FIRST VIEW

SCALE 1:1 UNIT mm

SAMZO COMPONENTS
 Electronic switch and connector manufacturer

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

TITLE: PH2.0-180°-LD
 DWG NO: 5FKA-P2001
 PART NO: 5FKA20018
 MODEL NO: 5FKAA-**-**-**
 NAME: WAFER CONNECTOR