
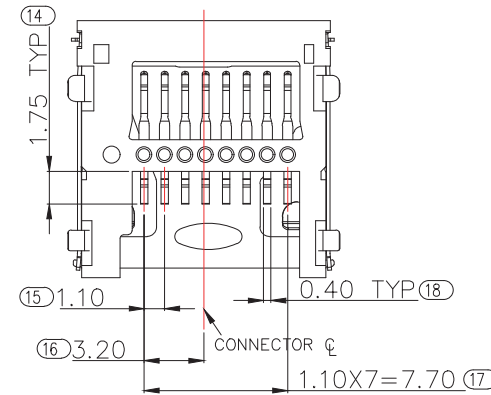
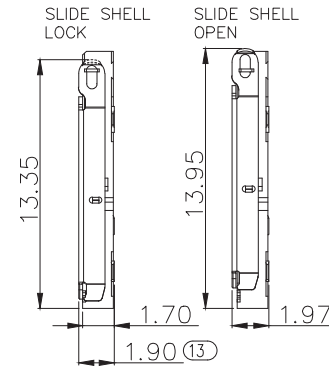
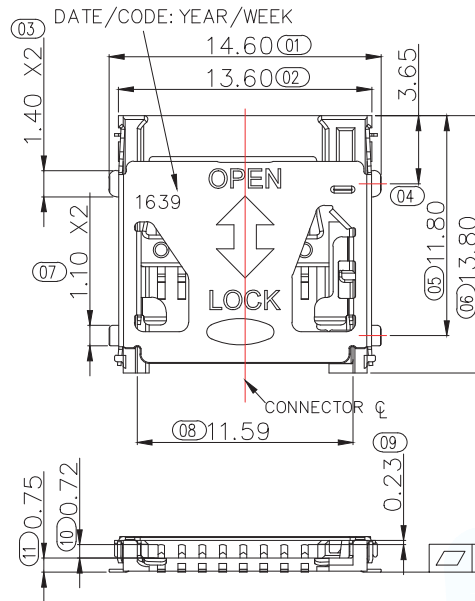
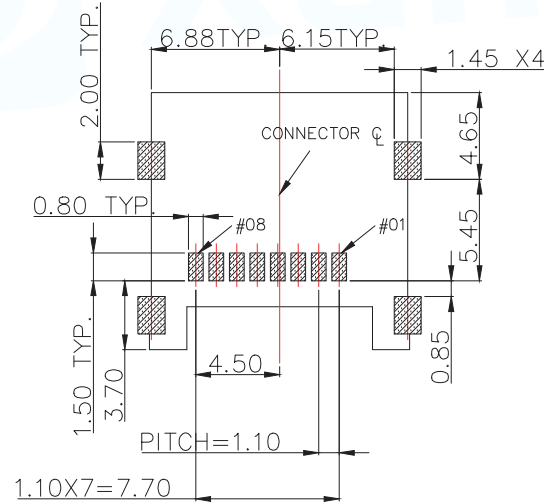


NOTES:

1. MATERIAL:

INSULATOR: HIGH TEMPERATURE THERMO PLASTIC
FLAMMABILITY RATING: UL94V-0 COLOR: BLACK
CONTACT: COPPER ALLOYS
COVER: STAINLESS STEEL



2. CONTACT AREA PLATING: GOLD OVER NI
3. SOLDER TAIL COPLANARITY MUST BE WITHIN 0.10MAX.

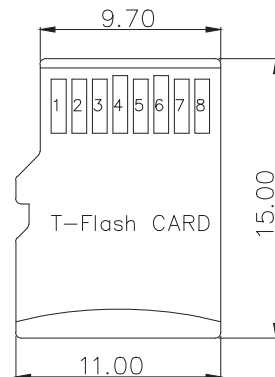

PAD AREA

KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

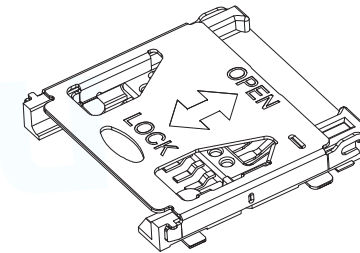

TF CARD PIN DEFINE			
PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

MANUFACTURE DWG



东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co., Ltd

UNLESS OTHERWISE
SPECIFIED TOLERANCES



TITLE: T-FLASH CARD HINGED
掀盖T卡

PAR TF-103-ARP8

DECIMALS:

ANGLES:

.X: ± 0.30 X": $\pm 2^\circ$.XX: ± 0.20 X.X": $\pm 1^\circ$.XXX: ± 0.10

CUSTOMER COPY

SCALE: 1:1 UNIT: MM

SIZE: A4 SHEET: 1F1 REV: A

