


NOTES:

1. MATERIALS:  
 CONTACT: BERYLLIUM COPPER  
 ALL OTHER METAL PARTS: STAINLESS STEEL  
 INSULATOR: ULTEM1000
2. FINISH:  
 CONTACT: GOLD  
 ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:  
 DURABILITY: 500 CYCLES
4. ELECTRICAL:  
 IMPEDANCE:  $50\Omega$   
 FREQUENCY RANGE: DC to 40GHz  
 VSWR(dB): 1.2:1 (-20.83dB)

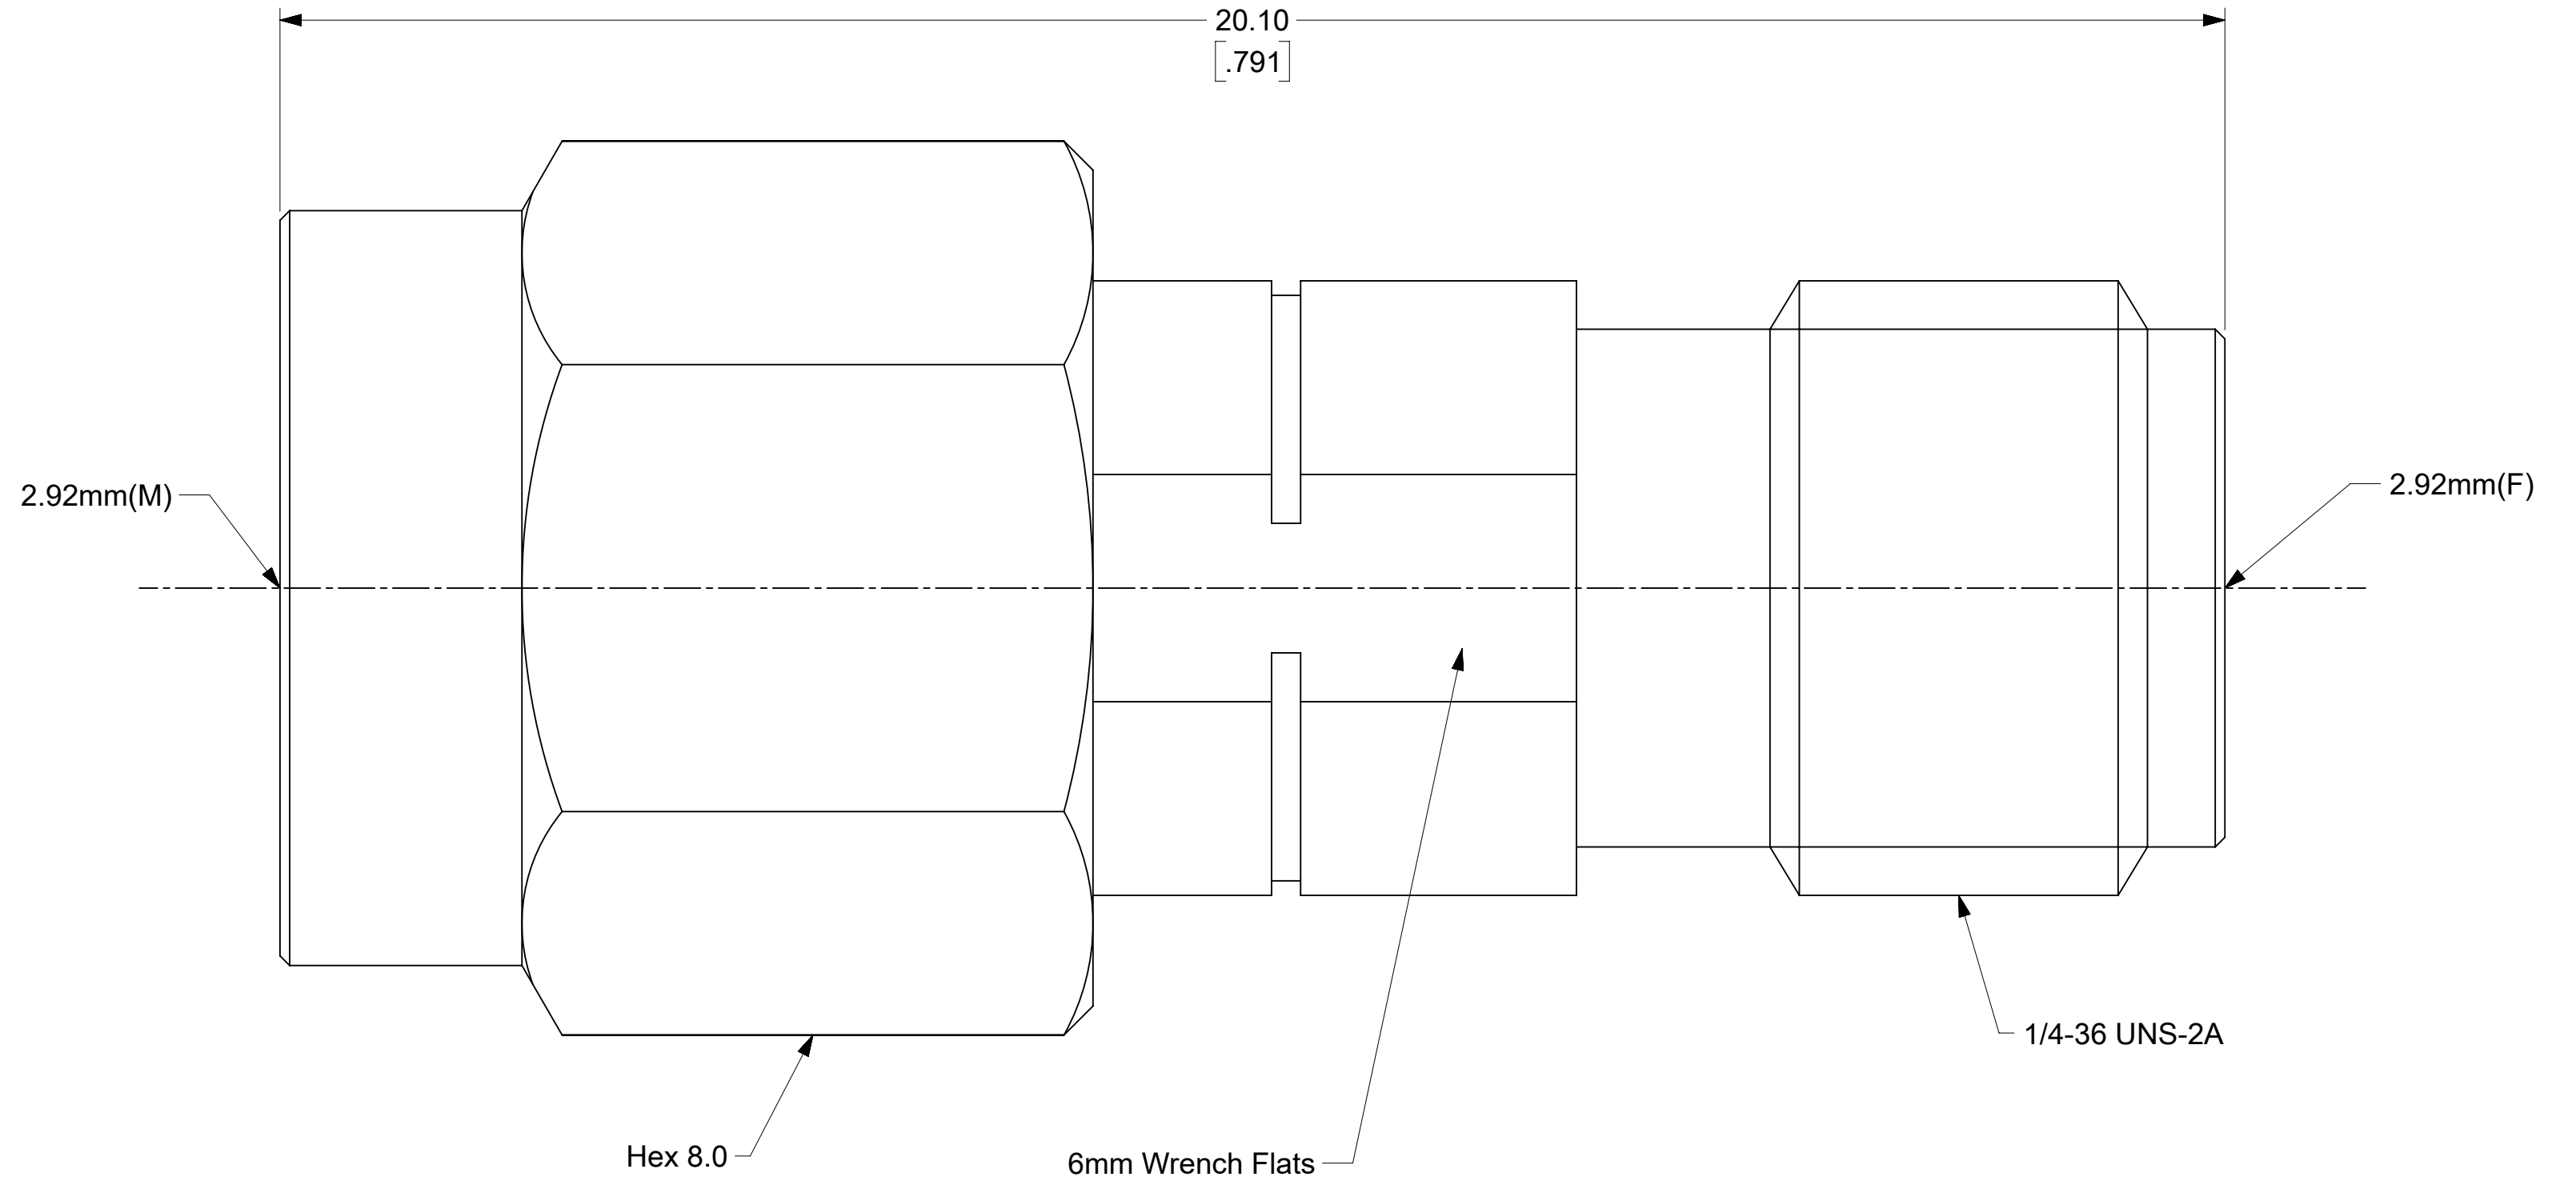

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{C} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: INITIAL RELEASE					
	MM/INCH		NTS							
	GENERAL TOLERANCES (UNLESS SPECIFIED)					EC NO: 731858		2.92MM PLUG TO 2.92MM JACK ADAPTER		
					DRWN: PKH		2022/11/24			
					CHK'D: JBORRELLI		2022/12/14			
					APPR: LMEIER		2022/12/15		PRODUCT CUSTOMER DRAWING	
					INITIAL REVISION:				DOCUMENT NUMBER	
					DRWN: PKH		2022/11/24		732520220	
					APPR: LMEIER		2022/12/15		PSD 000 A	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIRD ANGLE PROJECTION		DRAWING		SERIES	
							C-SIZE		73252	
					MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
					732520220				1 OF 1	