



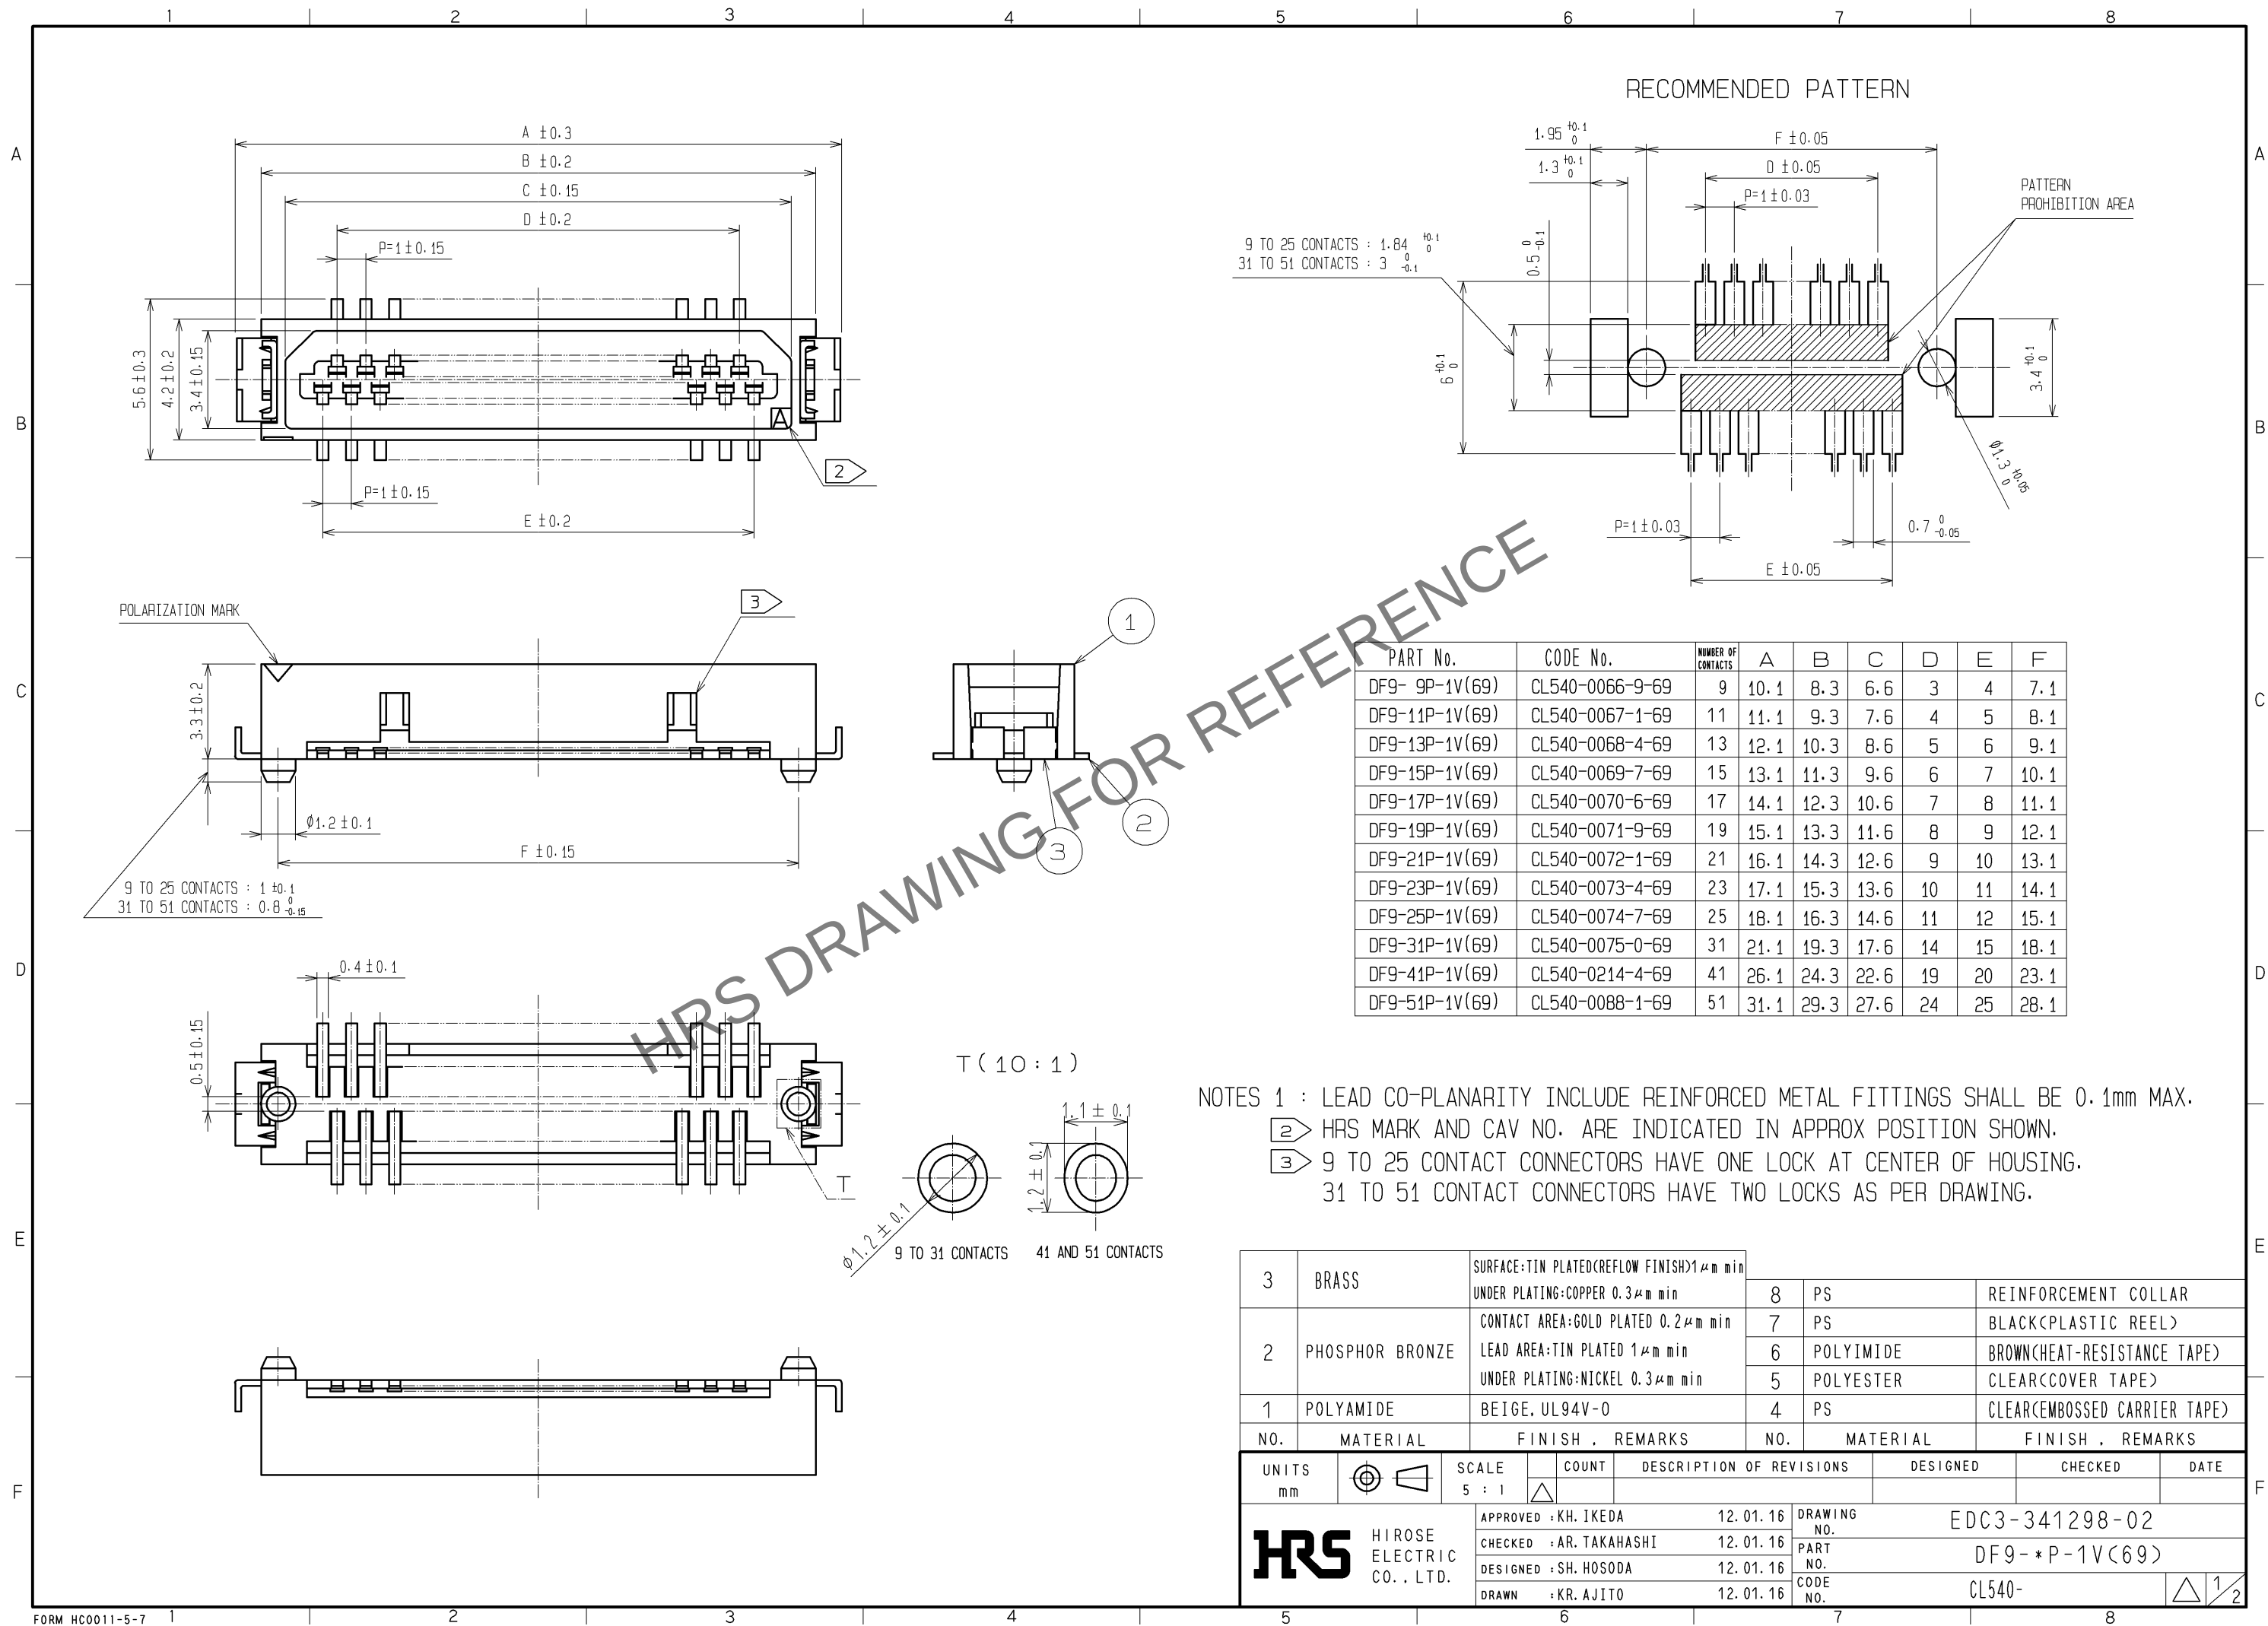

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

エンボスキャリアテープ (3:1)

STYLE AND DIMENSION OF REEL (FREE)

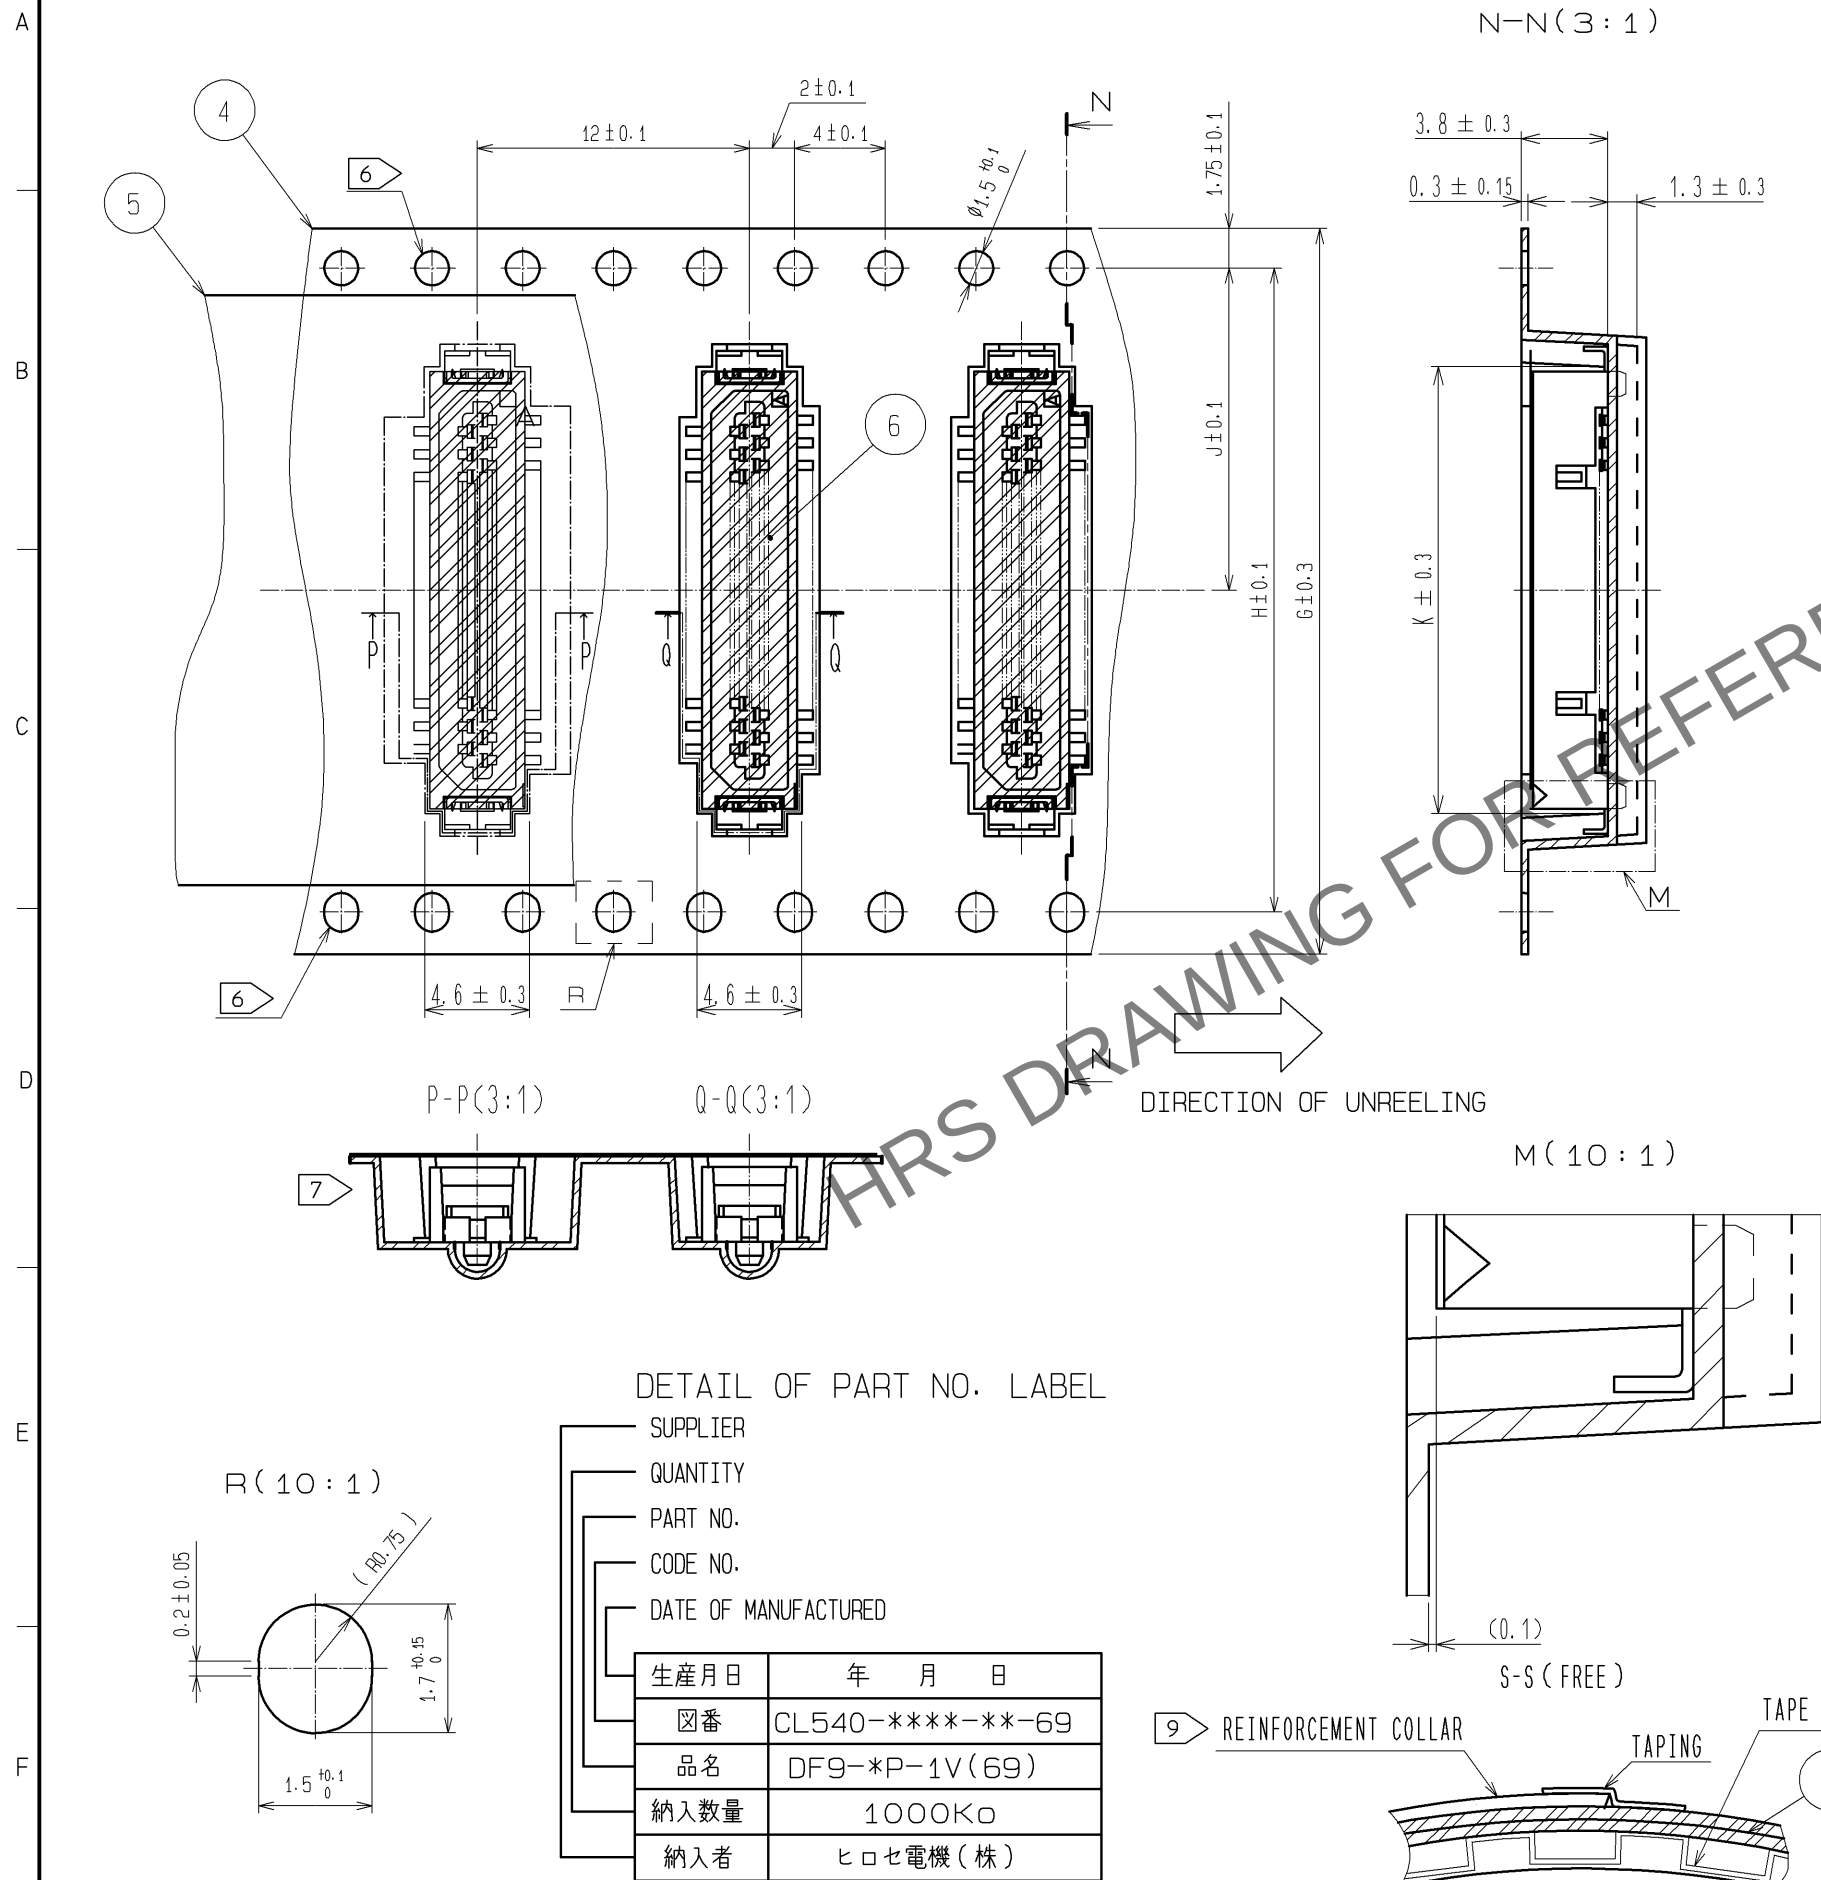

PART No.	CODE No.	NUMBER OF CONTACTS	G	H	J	K	L
DF9-9P-1V(69)	CL540-0066-9-69	9	24	—	11.5	8.7	25.5
DF9-11P-1V(69)	CL540-0067-1-69	11	24	—	11.5	9.7	25.5
DF9-13P-1V(69)	CL540-0068-4-69	13	24	—	11.5	10.7	25.5
DF9-15P-1V(69)	CL540-0069-7-69	15	24	—	11.5	11.7	25.5
DF9-17P-1V(69)	CL540-0070-6-69	17	24	—	11.5	12.7	25.5
DF9-19P-1V(69)	CL540-0071-9-69	19	24	—	11.5	13.7	25.5
DF9-21P-1V(69)	CL540-0072-1-69	21	24	—	11.5	14.7	25.5
DF9-23P-1V(69)	CL540-0073-4-69	23	32	28.4	14.2	15.7	33.5
DF9-25P-1V(69)	CL540-0074-7-69	25	32	28.4	14.2	16.7	33.5
DF9-31P-1V(69)	CL540-0075-0-69	31	32	28.4	14.2	19.7	33.5
DF9-41P-1V(69)	CL540-0214-4-69	41	44	40.4	20.2	24.7	45.5
DF9-51P-1V(69)	CL540-0088-1-69	51	44	40.4	20.2	29.7	45.5

NOTES 4 : 1 REEL 1000 CONNECTORS.

5 : AT THE BEIGINNING OF THE REEL,
30 COMPONENTS SHALL BE EMPTY.
AT THE END OF THE REEL,
20 COMPONENTS SHALL BE EMPTY.

6 LET THE SENDING HOLE OF 9 TO 21 CONTACTS
BE ONLY THE UPPER ONE SIDE TOWARD A DRAWING.
THE SENDING HOLE OF 23 OR MORE CONTACTS
IS ESTABLISHED IN BOTH SIDES, AS SHOWN IN A FIGURE.

7 A POCKET SHAPE IS DIFFERET AT INTERVALS OF EACH
CAVITY NUMBER TO AVOID OVERLAP.

8 : PEEL FORCE REFERS TO JIS C 0806.

9 AFTER PACKING, ROLL 2 METERS OF THE REINFORCEMENT
COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL
POCKET, AND TAPE DOWN AT THE END THE COLLAR.

DETAIL OF PART NO. LABEL

SUPPLIER
QUANTITY
PART NO.
CODE NO.
DATE OF MANUFACTURED

生産月日	年 月 日
図番	CL540-****-**-69
品名	DF9-*P-1V(69)
納入数量	1000K○
納入者	ヒロセ電機(株)

HRS

DRAWING NO.	EDC3-341298-02
PART NO.	DF9-*P-1V(69)
CODE NO.	CL540-

2/2