

TLS 2200® Wire & Cable Materials:

B-472 Flame Retardant Wire Wrap Material

Color: White or Yellow Finish: Matte

Polyimide wire and Cable Materials specifically designed to self-extinguish and prevent flames from propagating. This material is ideal for wire and cable identification in extreme environments, particularly in the aerospace, defense and mass transit industries.




Figure 29



Performance Attributes:  

Diagram	Part Number	B-#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 29	PTL-9-472	B-472	Polyimide	White	0.650 (16.5)	0.200 (5.1)	1	750	R4310
Fig. 29	PTL-10-472	B-472	Polyimide	White	0.750 (19.1)	0.250 (6.4)	1	750	R4310
Fig. 29	PTL-15-472	B-472	Polyimide	White	1.000 (25.4)	0.275 (7.0)	1	750	R4310
Fig. 29	PTL-29-472	B-472	Polyimide	White	1.500 (38.1)	0.500 (12.7)	1	500	R4310
Fig. 29	PTL-41-472	B-472	Polyimide	White	1.500 (38.1)	50 ft. (15.2 m)	1	1 Roll Cont.	R4310
Fig. 29	PTL-41-472-YL	B-472	Polyimide	Yellow	1.500 (38.1)	50 ft. (15.2 m)	1	1 Roll Cont.	R4310



TLS 2200® Wire & Cable Materials:

B-498 Repositionable Vinyl Cloth Material

Color: White Finish: Semi-Gloss

Repositionable vinyl cloth material for wire, cable, and component marking. Adhesive and cloth backing offers excellent holding power, while easily being repositioned and removed.




Figure 31




Figure 37





Figure 30

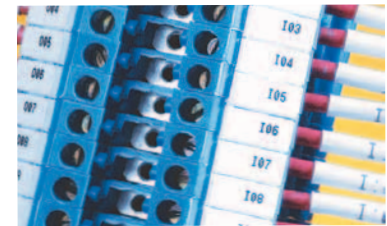

Performance Attributes:   

B-498 Material for General Applications

Diagram	Part Number	B-#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Approx. Wire Gauge	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 37	PTL-15-498	B-498	Vinyl	White	1.000 (25.4)	0.275 (7.0)	22 to 16	1	750	R6210
Fig. 37	PTL-7-498	B-498	Vinyl	White	0.500 (12.7)	0.500 (12.7)	22 to 16	1	500	R6210
Fig. 37	PTL-17-498	B-498	Vinyl	White	1.000 (25.4)	0.500 (12.7)	12 to 10	1	500	R6210
Fig. 31	PTL-10-498	B-498	Vinyl	White	0.250 (6.4)	0.750 (19.1)	16 to 10	1	750	R6210
Fig. 31	BPTL-11-498	B-498	Vinyl	White	0.500 (12.7)	0.750 (19.1)	16 to 10	1	5000	R6210
Fig. 31	PTL-11-498	B-498	Vinyl	White	0.500 (12.7)	0.750 (19.1)	16 to 10	1	500	R6210
Fig. 31	PTL-16-498	B-498	Vinyl	White	0.375 (9.5)	1.000 (25.4)	12 to 10	1	500	R6210
Fig. 31	BPTL-18-498	B-498	Vinyl	White	0.750 (19.1)	1.000 (25.4)	12 to 10	1	2500	R6210
Fig. 31	PTL-18-498	B-498	Vinyl	White	0.750 (19.1)	1.000 (25.4)	12 to 10	1	250	R6210
Fig. 37	BPTL-19-498	B-498	Vinyl	White	1.000 (25.4)	1.000 (25.4)	12 to 10	1	2500	R6210
Fig. 37	PTL-19-498	B-498	Vinyl	White	1.000 (25.4)	1.000 (25.4)	12 to 10	1	250	R6210
Fig. 31	PTL-28-498	B-498	Vinyl	White	0.250 (6.4)	1.500 (38.1)	10 to 4	1	750	R6210
Fig. 31	BPTL-29-498	B-498	Vinyl	White	0.500 (12.7)	1.500 (38.1)	10 to 4	1	5000	R6210
Fig. 31	PTL-30-498	B-498	Vinyl	White	0.750 (19.1)	1.500 (38.1)	10 to 4	1	250	R6210
Fig. 31	PTL-31-498	B-498	Vinyl	White	1.000 (25.4)	1.500 (38.1)	10 to 4	1	250	R6210
Fig. 37	PTL-32-498	B-498	Vinyl	White	1.500 (38.1)	1.500 (38.1)	10 to 4	1	250	R6210
Fig. 31	PTL-21-498	B-498	Vinyl	White	1.000 (25.4)	2.500 (63.5)	Cables	1	100	R6210
Fig. 31	PTL-23-498	B-498	Vinyl	White	1.000 (25.4)	4.000 (101.6)	Cables	1	100	R6210
Fig. 31	PTL-33-498	B-498	Vinyl	White	1.500 (38.1)	4.000 (101.6)	Cables	1	100	R6210
Fig. 31	PTL-34-498	B-498	Vinyl	White	1.500 (38.1)	6.000 (152.4)	Cables	1	50	R6210

B-498 Material for Terminal Block Applications

Diagram	Part Number	B-#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Approx. Wire Gauge	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 30	PTLTB-498-240	B-498	Vinyl	White	0.240 (6.1)	30 ft. (9.1 m)	-	1	1 Roll Cont.	R6210
Fig. 30	PTLTB-498-318	B-498	Vinyl	White	0.318 (8.1)	30 ft. (9.1 m)	-	1	1 Roll Cont.	R6210
Fig. 30	PTLTB-498-375	B-498	Vinyl	White	0.375 (9.5)	30 ft. (9.1 m)	-	1	1 Roll Cont.	R6210
Fig. 30	BPTLTB-498-240	B-498	Vinyl	White	0.240 (6.1)	300 ft. (91.4 m)	-	1	1 Roll Cont.	R6210
Fig. 30	BPTLTB-498-318	B-498	Vinyl	White	0.318 (8.1)	300 ft. (91.4 m)	-	1	1 Roll Cont.	R6210
Fig. 30	BPTLTB-498-375	B-498	Vinyl	White	0.375 (9.5)	300 ft. (91.4 m)	-	1	1 Roll Cont.	R6210

Approx. wire gauge based on AWG for THHN wire.

View the Material Brands & Attributes Guide on page 4.

TLS2200® Printer Ribbons on page 67.

Full Material Properties on page 187.