

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1775078

# SIL10E Series

3.0 Vin to 5.5 Vin single output

DC-DC CONVERTERS


E Class Non-isolated

1

**NEW Product**



- **10 A Current rating**
- **Input voltage range: 3.0 Vdc to 5.5 Vdc**
- **Output voltage range: 0.8 Vdc to 3.63 Vdc**
- **Ultra high efficiency: 96% @ 5 Vin and 3.3 Vout**
- **Extremely low internal power dissipation**
- **Minimal thermal design concerns**
- **Designed in reliability: MTBF of >7 million hours per Telcordia SR-332**
- **Ideal solution where board space is at a premium or tighter card pitch is required**
- **Industry standard footprint and pin out**
- **Available RoHS compliant**

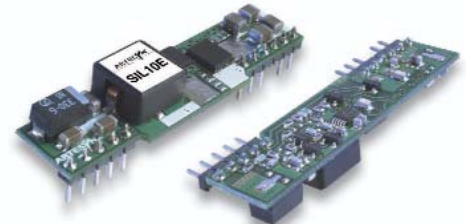

The SIL10E series are non-isolated dc-dc converters packaged in a single-in-line footprint giving designers a cost effective solution for conversion from either a 5 V or a 3.3 V source. The SIL10E offers a range of fixed outputs and one wide trim output unit at an industry leading 10 A which allows maximum design flexibility and a pathway for future upgrades. The SIL10E is designed for applications that include distributed power, workstations, optical network and wireless applications. Implemented using state of the art surface mount technology and automated manufacturing techniques, the SIL10E offers compact size and efficiencies of up to 96%.



**2 YEAR WARRANTY**

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

## SPECIFICATIONS

### OUTPUT SPECIFICATIONS

|                                    |   |   |
|------------------------------------|---|---|
| Voltage adjustability (See Note 1) | Fixed output versions<br>5 Vin with wide trim<br>3.3 Vin with wide trim | ±10%<br>0.8-3.63 Vdc<br>0.8-2.75 Vdc                      |
| Setpoint accuracy                  |   | ±0.4%   |
| Line regulation                    |   | ±0.2%   |
| Load regulation                    |   | ±1.0%   |
| Minimum load                       |   | 0 A   |
| Overshoot/undershoot               |   | None  |
| Ripple and noise<br>0 to 20MHz BW  |   | 50 mV pk-pk<br>25 mV rms max.                             |
| Temperature co-efficient           |   | ±0.01%/°C   |
| Transient response                 |   | 50 mV max. deviation<br>50 µs recovery to<br>within ±1.0% |
| Remote sense                       |   | 10% Vo compensation                                       |

### INPUT SPECIFICATIONS

|                      |         |  |
|----------------------|---------|--|
| Input voltage range  |         | 3.0-5.5 Vdc                            |
| Input current        | No load | 70 mA                                  |
| Input current (max.) |         | 8 A max. @ Io max.<br>and Vout = 3.3 V |
| Input current ripple |         | 65 mA rms                              |
| Remote ON/OFF        |         | (See Note 2)                           |
| Start-up time        |         | 20 ms                                  |

### International Safety Standard Approvals



UL/cUL CAN/CSA-C22.2 No. 60950-1-03/UL 60950-1,  
File No. E174104



TÜV Product Service (EN60950) Certificate No. B 03 10 38572 037  
CB Report and Certificate to IEC60950, Certificate No.  
DE3-51686M1

### EMC CHARACTERISTICS

|                         |                       |
|-------------------------|-----------------------|
| Electrostatic discharge | EN61000-4-2, IEC801-2 |
| Conducted immunity      | EN61000-4-6           |
| Radiated immunity       | EN61000-4-3           |

### GENERAL SPECIFICATIONS

|                                  |                                   |   |
|----------------------------------|-----------------------------------|---|
| Efficiency                       |                                   | See table                                       |
| Insulation voltage               |                                   | Non-isolated                                    |
| Switching frequency              | Fixed                             | 300 kHz typ.                                    |
| Approvals and standards          |                                   | EN60950<br>UL/cUL60950                          |
| Material flammability            |                                   | UL94V-0   |
| Dimensions<br>(vertical version) | (LxWxH)                           | 50.8 x 7.8 x 12.7 mm<br>2.0 x 0.31 x 0.5 inches |
| Pin length                       | (Vertical)                        | 0.135 ±0.02 in (3.43 ±0.5 mm)                   |
| Weight                           |                                   | 5 g (0.18 oz)                                   |
| MTBF                             | Telcordia SR-332<br>MIL-HDBK-217F | 7,042,000 hours<br>680,000 hours                |

### ENVIRONMENTAL SPECIFICATIONS

|                                     |  |  |
|-------------------------------------|--|--|
| Thermal performance<br>(See Note 3) | Operating ambient,<br>temperature<br>Non-operating | -40 °C to +100 °C<br>-40 °C to +125 °C |
|-------------------------------------|--|--|

### PROTECTION

|               |                    |
|---------------|--------------------|
| Short-circuit | Continuous         |
| Thermal       | Automatic recovery |

# SIL10E Series

3.0 Vin to 5.5 Vin single output

DC-DC CONVERTERS | E Class Non-isolated


For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

**NEW Product**

| OUTPUT POWER (MAX.) | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT (MIN.) | OUTPUT CURRENT (MAX.) | EFFICIENCY (TYP.) | REGULATION |       | MODEL NUMBER <sup>(4,5,6)</sup> |
|---------------------|---------------|----------------|-----------------------|-----------------------|-------------------|------------|-------|---------------------------------|
|                     |               |                |                       |                       |                   | LINE       | LOAD  |                                 |
| 8.8 W               | 3.-5.5 V      | 0.8 V          | 0 A                   | 10 A                  | 83%               | ±0.2%      | ±1.5% | SIL10E-05S0V8-VJ                |
| 11 W                | 3.0-5.5 V     | 1 V            | 0 A                   | 10 A                  | 86%               | ±0.2%      | ±1.5% | SIL10E-05S1V0-VJ                |
| 13.2 W              | 3.0-5.5 V     | 1.2 V          | 0 A                   | 10 A                  | 88%               | ±0.2%      | ±1.0% | SIL10E-05S1V2-VJ                |
| 16.5 W              | 3.0-5.5 V     | 1.5 V          | 0 A                   | 10 A                  | 90%               | ±0.2%      | ±1.0% | SIL10E-05S1V5-VJ                |
| 19.8 W              | 3.0-5.5 V     | 1.8 V          | 0 A                   | 10 A                  | 92%               | ±0.2%      | ±1.0% | SIL10E-05S1V8-VJ                |
| 22 W                | 3.0-5.5 V     | 2 V            | 0 A                   | 10 A                  | 93%               | ±0.2%      | ±1.0% | SIL10E-05S2V0-VJ                |
| 27.5 W              | 3.0-5.5 V     | 2.5 V          | 0 A                   | 10 A                  | 94%               | ±0.2%      | ±1.0% | SIL10E-05S2V5-VJ                |
| 36.3 W              | 4.5-5.5 V     | 3.3 V          | 0 A                   | 10 A                  | 95%               | ±0.2%      | ±1.0% | SIL10E-05S3V3-VJ                |
| 36.3 W              | 4.5-5.5 V     | 0.8-3.63 V     | 0 A                   | 10 A                  | 95%               | ±0.2%      | ±1.0% | SIL10E-05W3V3-VJ                |

## Part Number System with Options

### SIL10E-05S3V3-VJ

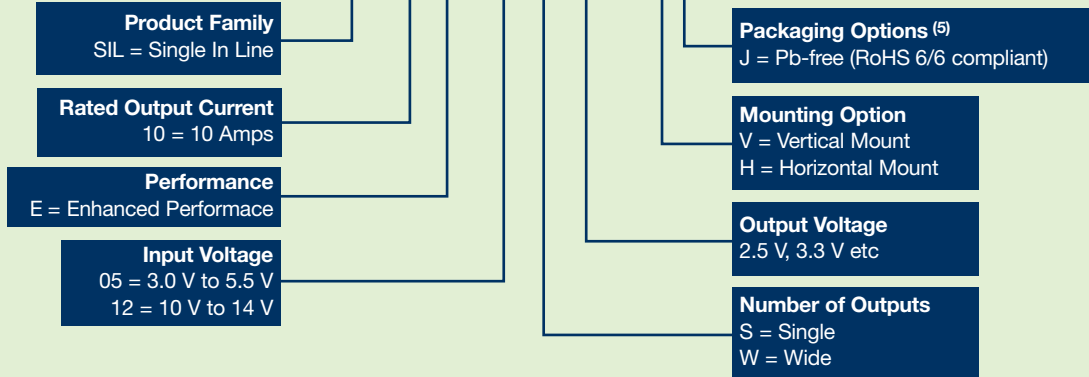

#### Output Voltage Adjustment of the SIL10E-05W3V3J Series

The ultra-wide output voltage trim range offers major advantages to users who select the SIL10E-05W3V3J. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 3.63 Vdc. When the SIL10E-05W3V3J converter leaves the factory the output has been adjusted to the default voltage of 3.3 V.

- When  $V_{in} \geq 4.5$  V, then  $V_{out}$  can be adjusted from 0.8 Vdc to 3.6 Vdc
- When  $V_{in} < 4.5$  V, then  $V_{out}$  can be adjusted from 0.8 Vdc to 2.75 Vdc

## Notes

- 1 When  $V_{in} \geq 4.5$  V, then  $V_{out}$  can be adjusted from 0.8 V to 3.6 V. When  $V_{in} < 4.5$  V, then  $V_{out}$  can be adjusted from 0.8 V to 2.75 V.
- 2 The SIL10E features a 'Negative Logic' Remote ON/OFF operation. If you are not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground.

The following conditions apply for the SIL10E:

| Configuration                                  | Converter Operation |
|--|---------------------|
| Remote pin open circuit                        | Unit is ON          |
| Remote pin pulled low                          | Unit is ON          |
| Remote pin pulled high [ $V_{on/off} > 1.2$ V] | Unit is OFF         |

A 'Positive Logic' Remote ON/OFF version is also possible with this converter. To order please place the suffix 'R' towards the end of the model number e.g. SIL10E-05S3V3-VRJ.

## Notes Cond.

- 3 Full derating curves available in both the Longform Datasheet and Application Note 136.
- 4 For certain applications that use low ESR capacitors on the output of the converter and to insure maximum converter stability, please add the suffix '02' to the model, e.g. SIL10E-05S2V5-V02J.
- 5 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 6 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

# SIL10E Series

3.0 Vin to 5.5 Vin single output

| J1 PIN CONNECTIONS |                  |
|--------------------|------------------|
| PIN NUMBER         | FUNCTION         |
| 1                  | +Vout            |
| 2                  | +Vout            |
| 3                  | Remote Sense (+) |
| 4                  | +Vout            |
| 5                  | Ground           |

| J2 PIN CONNECTIONS |               |
|--------------------|---------------|
| PIN NUMBER         | FUNCTION      |
| 1                  | Ground        |
| 2                  | +Vin          |
| 3                  | +Vin          |
| 4                  | No Pin        |
| 5                  | Trim          |
| 6                  | Remote ON/OFF |

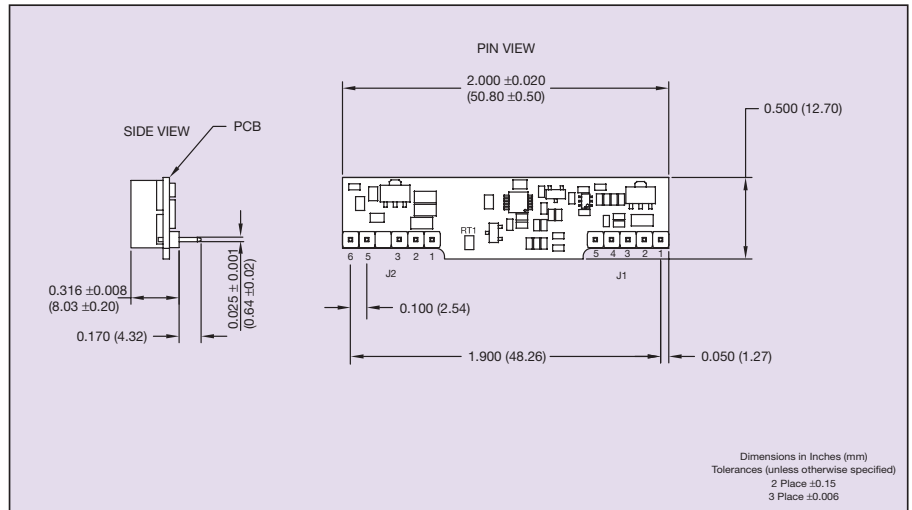


Figure 1: Mechanical Drawing - Horizontal Mount Version

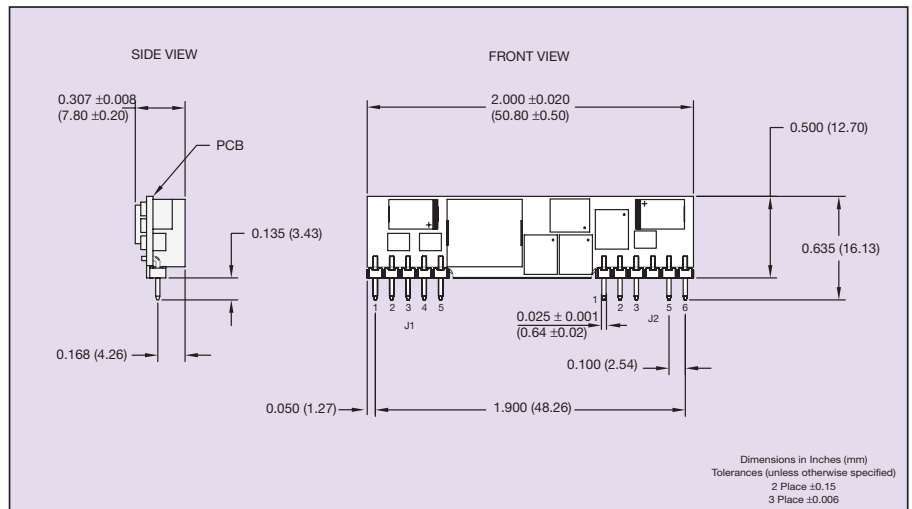


Figure 2: Mechanical Drawing - Vertical Mount Version