
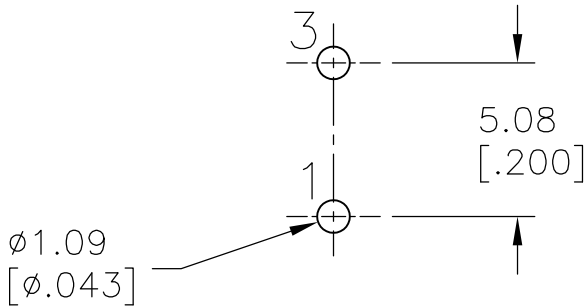
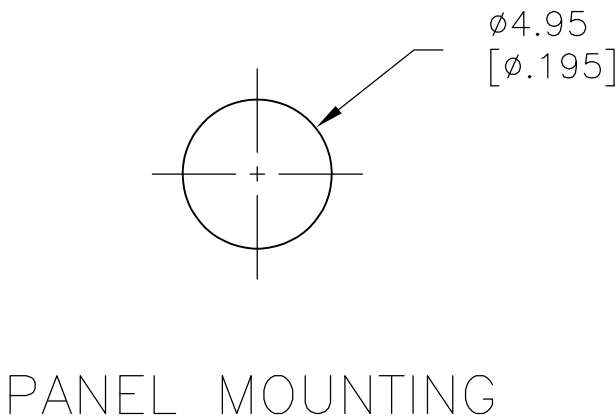


D

C

B

A

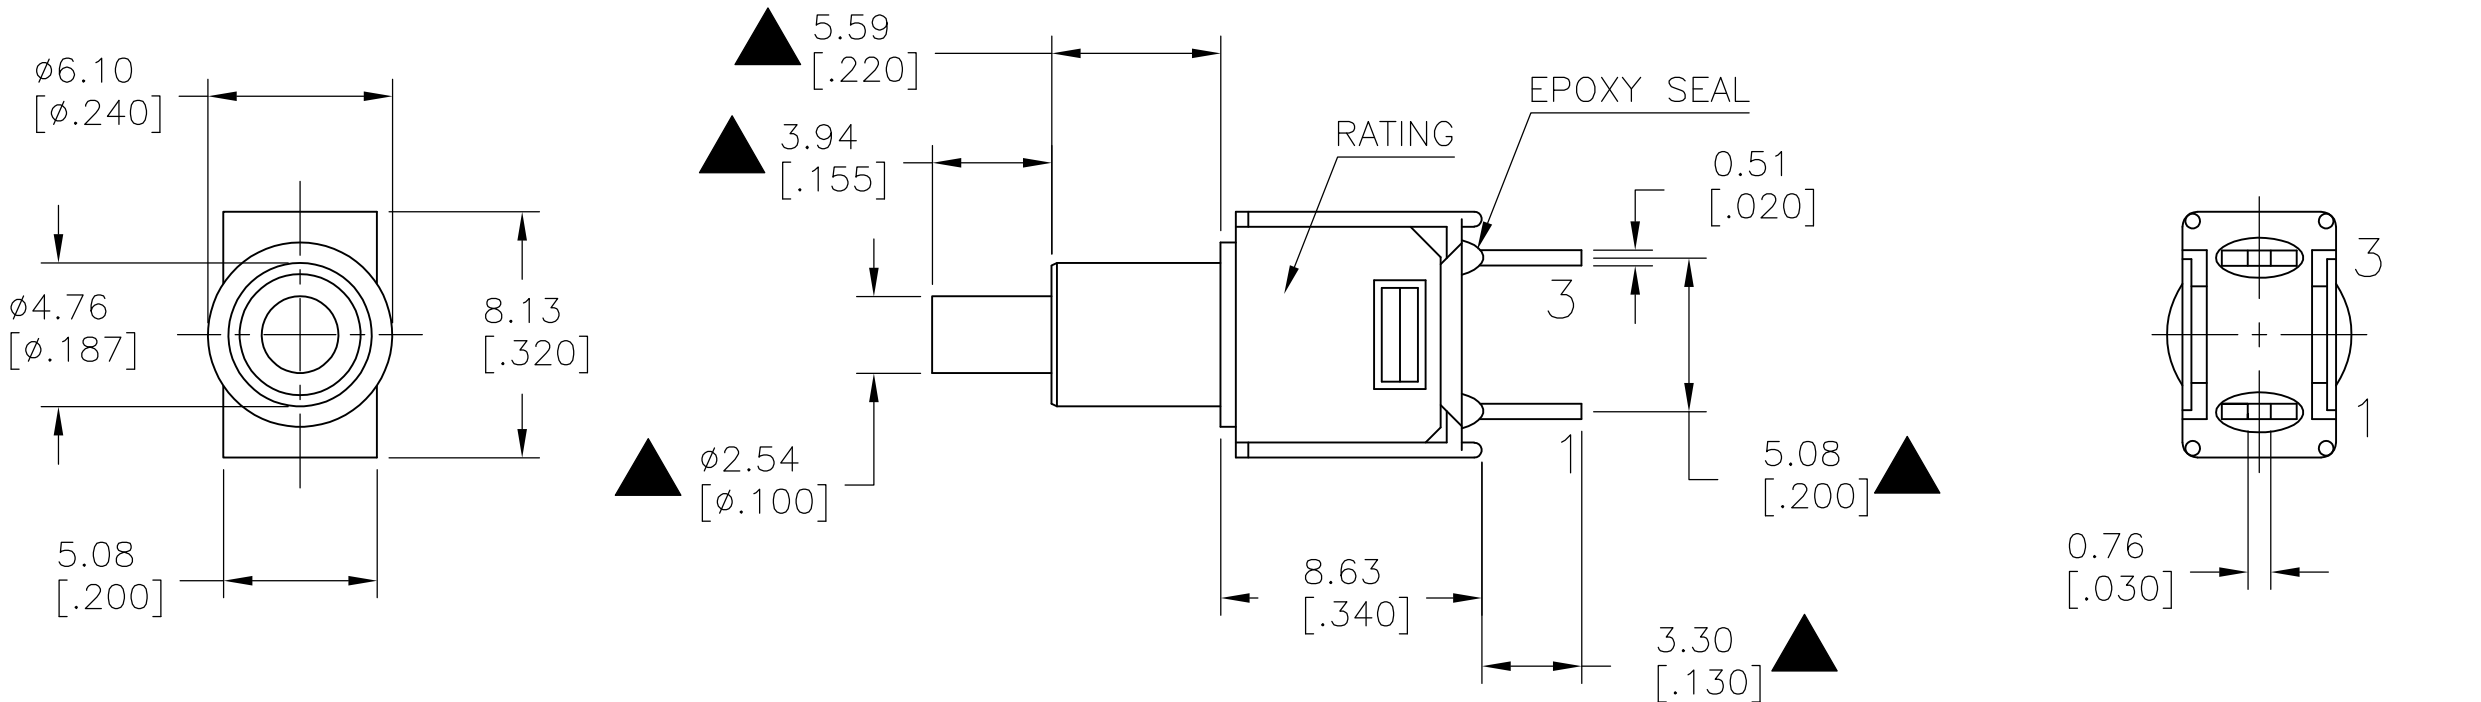

MODEL NO.	POS.1	POS.2
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		

SWITCH FUNCTION

LAYOUT FOR PN 2267073-1

SPECIFICATIONS



- MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC 100mA FOR BOTH SILVER AND GOLD PLATED CONTACTS.
- CONTACT RATING: GOLD PLATED: 0.4VA MAX @20 V MAX (AC OR DC)
- INSULATION RESISTANCE: 1,000 mΩ MIN.
- DIELECTRIC STRENGTH: 1,000 VRMS MIN.@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

GOLD	OFF—MOM	PC THROUGH HOLE	RIGHT ANGLE	1	1	PMS9P1B07M6RE	2267073—2
GOLD	OFF—MOM	PC THROUGH HOLE	VERTICAL	1	1	PMS9P1B07M2RE	2267073—1
CONTACT MATERIAL	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN
<div><div>THIS DRAWING IS A CONTROLLED DOCUMENT.</div><div><div><div>DIMENSIONS: mm [INCHES]</div><div></div></div><div><div><div>TOLERANCES UNLESS OTHERWISE SPECIFIED:</div><div><div>0 PLC ± —</div><div>1 PLC ± 0.38[.015]</div><div>2 PLC ± 0.25[.010]</div><div>3 PLC ± —</div><div>4 PLC ± —</div><div>ANGLES ± —</div></div><div><div>MATERIAL —</div><div>FINISH —</div></div></div></div></div></div>		<div><div>DWN 10JUL2014 NAGALAKSHMI K</div><div>CHK 10JUL2014 HILL, RYAN</div><div>APVD 10JUL2014 HILL, RYAN</div><div>PRODUCT SPEC —</div><div>APPLICATION SPEC —</div><div>WEIGHT —</div></div>		<div><div><div>STE</div><div>TE Connectivity</div></div><div>NAME</div><div>SUBMINIATURE PUSH BUTTON SWITCH</div><div><div>SIZE</div><div>CAGE CODE</div><div>DRAWING NO</div><div>RESTRICTED TO</div></div><div><div>A2</div><div>00779</div><div>C=2267073</div><div>SCALE 3:1</div><div>SHEET 1 of 2</div><div>REV A</div></div></div>			
		CUSTOMER DRAWING					


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
—	—	—	—	SEE SHEET 1	—	—

MODEL NO.	POS.1	POS.2
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		

SWITCH FUNCTION

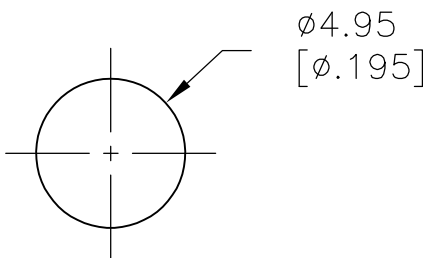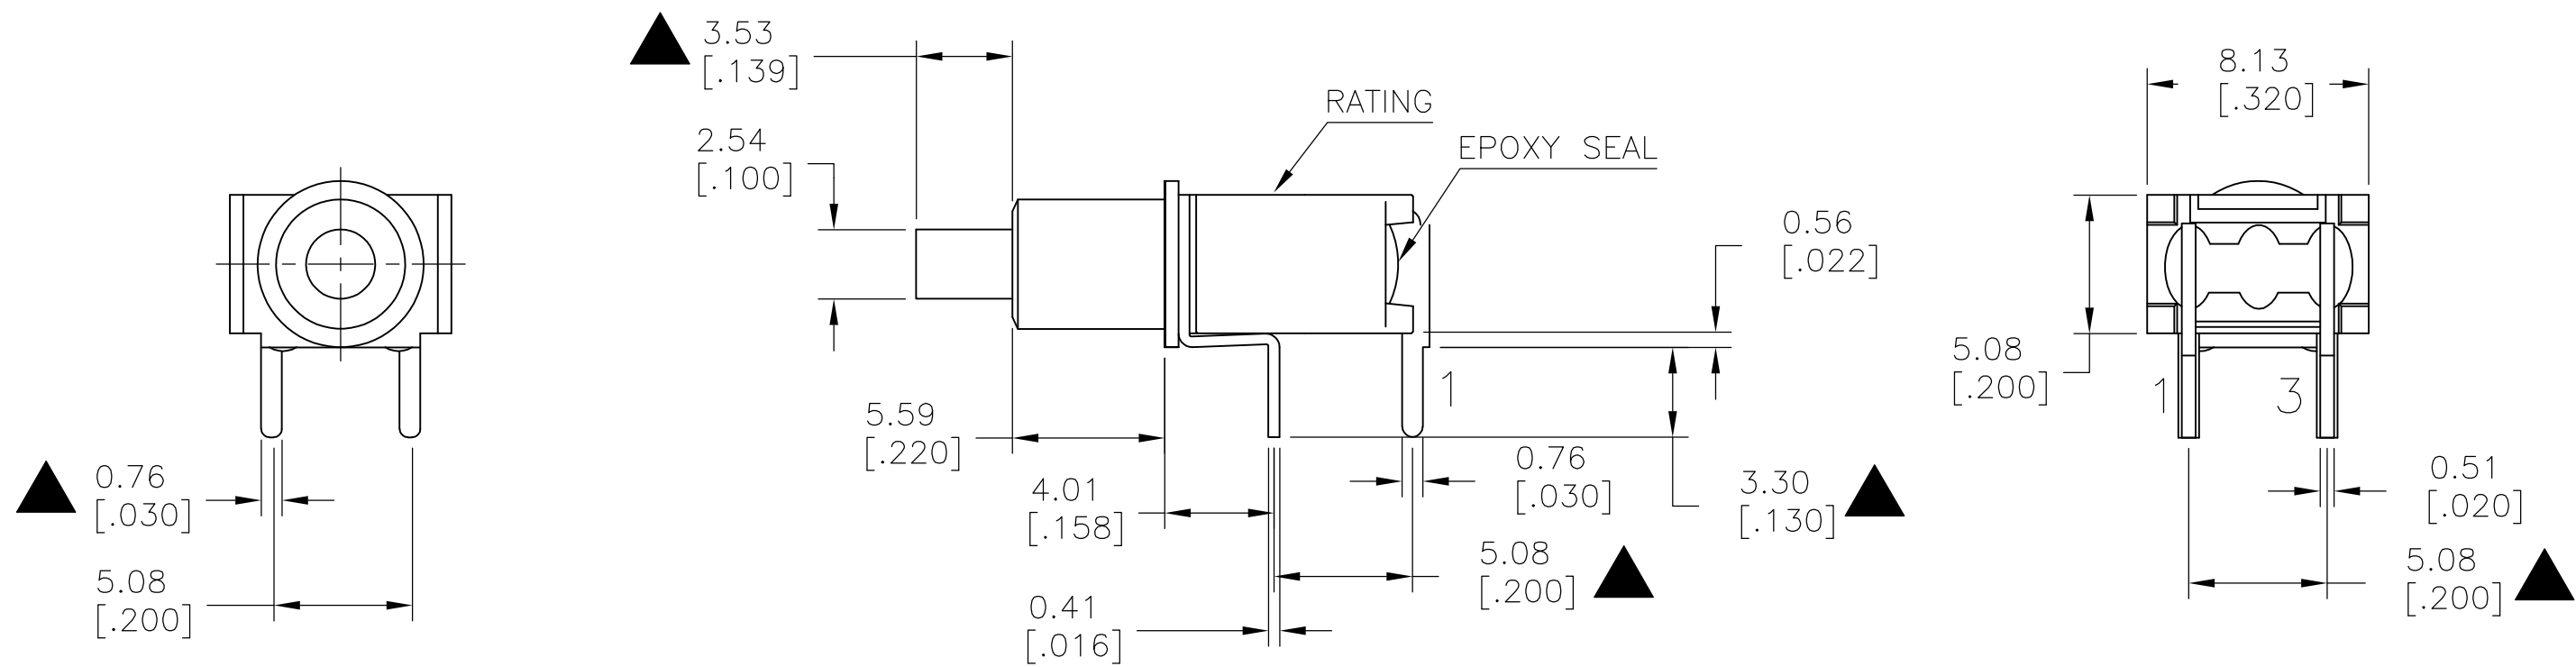



PANEL MOUNTING

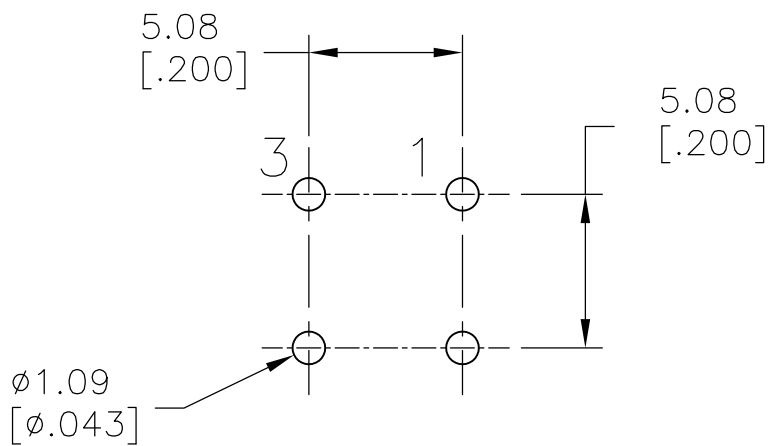

P.C. MOUNTING

LAYOUT FOR PN 2267073-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 10JUL2014		 TE Connectivity									
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 10JUL2014											
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD HILL, RYAN 10JUL2014		NAME SUBMINIATURE PUSH BUTTON SWITCH								
			PRODUCT SPEC —										
			APPLICATION SPEC —		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		
	MATERIAL —		FINISH —		WEIGHT —		A2		00779		C=2267073		—
CUSTOMER DRAWING						SCALE 3:1		SHEET 2 of 2		REV A			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[PMS9P1B07M2RE](#)