

# T3AFG30 / T3AFG60 Data Sheet

## Function/Arbitrary Waveform Generators

### Debug with Confidence

#### 30 MHz – 60 MHz

Teledyne Test Tools T3AFG30 and T3AFG60 range of function/arbitrary generators are a series of dual-channel waveform generators with specifications of up to 60 MHz maximum bandwidth, 150 MSa/s maximum sampling rate and 14-bit vertical resolution.

The proprietary Arbitrary & Pulse techniques used in the T3AFG30/ T3AFG60 models helps to solve the weaknesses inherent in traditional DDS generators when generating arbitrary, square and pulse waveforms. With the above advantages the T3AFG30 and T3AFG60 generators can provide users with a variety of high fidelity and low jitter signals, which can meet the growing requirements of a wide range of complex applications.



### Tools for Improved Debugging

- Deep Memory – 16 kpts/Ch. ✔ Generate complex arbitrary waveforms.
- Wide Range of Modulation Types – AM, DSB-AM, FM, PM, FSK, ASK, PWM, Sweep, Burst, and PSK. ✔ Quickly set up modulated waveforms.
- High Resolution – 14 bit resolution. ✔ Generate waveforms with low noise, low spurious signal content and high dynamic range.
- Bandwidth Models of 30 MHz and 60 MHz. ✔ Wide choice of bandwidths. Other models available up to 500 MHz.
- Built In Arbitrary Waveforms. ✔ Load and replay built in Arbitrary Waveforms.
- User Defined Waveforms. ✔ Store and recall user defined waveforms.
- Lower cost 5 MHz and 10 MHz single channel models are also available. ✔ Enquire about the T3AFG5 and T3AFG10.

### Key Specifications

Bandwidth	30 MHz, 60 MHz
Channels	2 Independent Channels
Memory	16 kpts/Ch
Sample Rate	150 MS/s
Display	4.3 inch TFT LCD Display
Connectivity	USB Host, USB Device, LAN

# PRODUCT OVERVIEW


## Ordering Information

Model	Bandwidth	Channel	Memory per Ch	Sample Rate per Ch
T3AFG30	30 MHz	2	16 kpts	150 MS/s
T3AFG60	60 MHz	2	16 kpts	150 MS/s


Function	T3AFG30, T3AFG60
Built-in Waveforms	5 Standard, 196 Arbitrary
Input/Output	2 Waveform Outputs, Counter Input, Aux In/Out, 10 MHz Clock In/Out
Modulation Functions	AM, DSB-AM, FM, PM, FSK,ASK, PSK,PWM, Sweep, Burst, Harmonic
TrueArb and EasyPulse	Yes
Maximum Amplitude Output	≤ 10 MHz: 10 Vpp at 50 Ohms, 20 Vpp at HiZ > 10 MHz: 5 Vpp at 50 Ohms, 10 Vpp at HiZ
Vertical D/A Resolution	14 Bits
Display Size	4.3" Color TFT

## Excellent Performance

- Model bandwidths from 30 MHz to 60 MHz
- All Models have 2 Channels
- 16 kpts/Channel memory

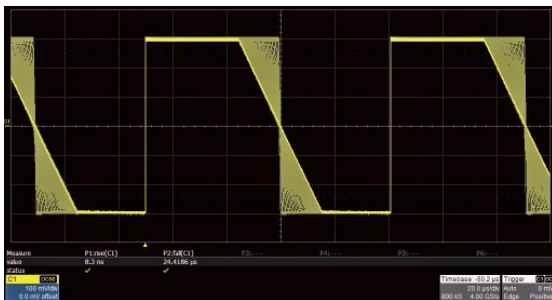


The rise/fall times can be set independently to a minimum of 16.8 ns at any frequency and to a maximum of 22.4s.

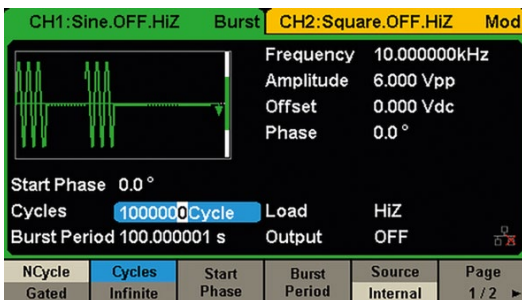


Burst mode supports 'N Cycle' and 'Gated' modes with the Burst source being configured as 'Internal', 'External' or 'Manual'.

## Great Connectivity


- USB host port for mass storage
- USB device port (USBTMC)
- LAN port

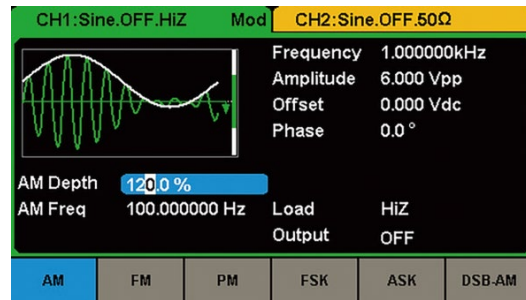


The T3AFG range of Function/Arbitrary Waveform Generators support a wide range of modulation types including AM, FM, PM, FSK,ASK,PSK and DSB-AM.

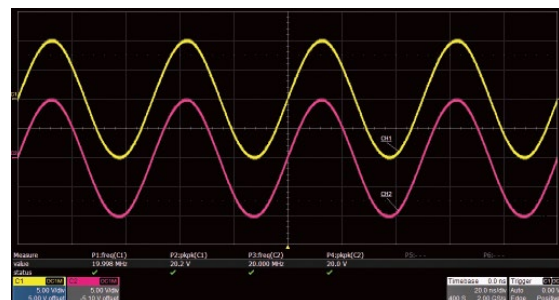


Output amplitude into a high impedance load can be as high 20 Vpp at frequencies up to 10 MHz, and 10 Vpp for frequencies greater than 20 MHz.

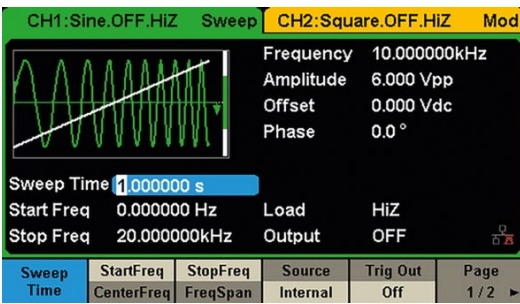



Sweep mode supports 'Linear' and 'Log' sweep, with 'Up' and 'Down' direction, and Sweep source can be configured as 'Internal', 'External' or 'Manual'.

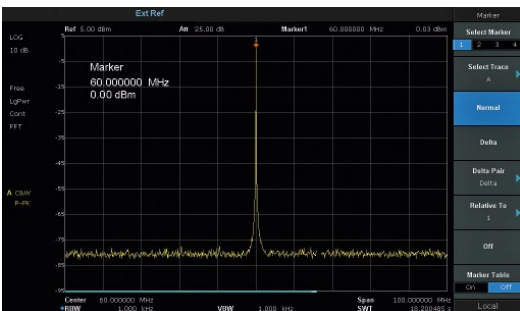

Sine wave output exhibits almost no spurious artefacts at 60 MHz and 0 dBm.

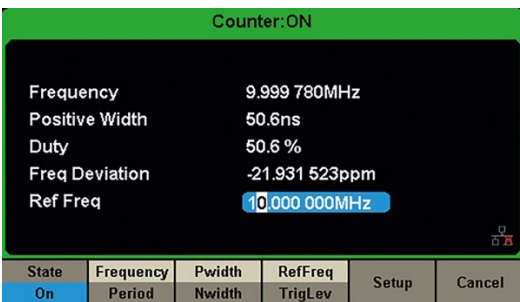

The counter functionality, accessed via the rear panel BNC, gives a DC or AC coupled counter capability from 100 MHz to 200 MHz.

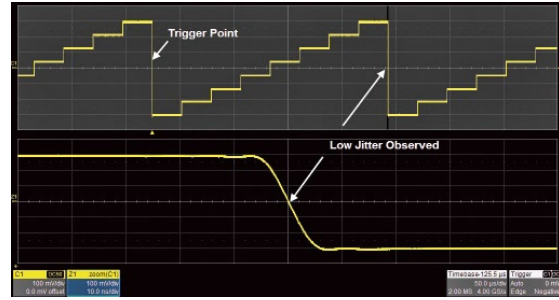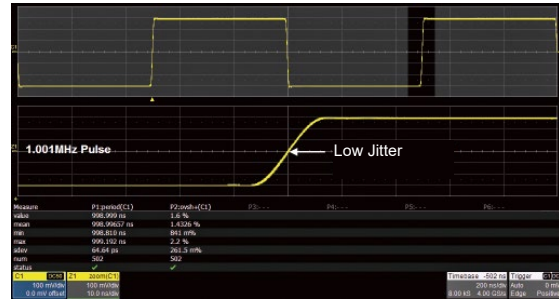

The Teledyne Test Tools T3AFG30 and T3AFG60, with its low jitter design, can generate waveforms with exceptional edge stability. With better jitter performance comes better edge stability, and higher confidence in your circuit design.

## Smart Capabilities

- Sweep output carrier can be Sine, Square, Ramp and Arbitrary waveforms
- Burst output under internal or external signal control
- Waveforms types include DC
- Frequency Resolution 1  $\mu$ Hz
- DSB-AM: Double Sideband AM modulation Function
- Harmonic Function generating up to 16 harmonics
- Multi-Language User Interface

## I/O Connectivity

- LAN and USB connection
- 10 MHz Reference Input/Output
- Aux Input/Output
- External modulation input
- External burst/sweep trigger input
- External gate input
- The Aux Input/Output will output a trigger pulse when an internal source is used
- External Counter input

# SPECIFICATIONS

## Frequency Specification

Model	T3AFG30	T3AFG60
Waveform	Sine, Square, Ramp, Pulse, Noise, Arbitrary	
Sine	1 $\mu$ Hz - 30 MHz	1 $\mu$ Hz - 60 MHz
Square	1 $\mu$ Hz - 30 MHz	1 $\mu$ Hz - 60 MHz
Pulse	1 $\mu$ Hz - 12.5 MHz	
Ramp/Triangular	1 $\mu$ Hz - 500 kHz	
Noise	60 MHz (-3 dB)	
Arbitrary	1 $\mu$ Hz - 6 MHz	
Resolution	1 $\mu$ Hz	
Accuracy	1 <sup>st</sup> year aging +/- 25 ppm at 0 - 40 Degrees C	

## Sine Wave

Harmonic Distortion	DC - 10 MHz <- 60 dBc 10 MHz - 30 MHz <- 50 dBc 30 MHz - 60 MHz <- 40 dBc
Total harmonic distortion.	0.075 %, 0 dBm, 10 Hz - 20 kHz
Spurious signal (non-harmonic)	DC < 10 MHz <- 65 dBc 10 MHz - 30 MHz <- 55 dBc 30 MHz - 60 MHz <- 40 dBc

## Square Wave

Rise/fall time	4.2 ns, 10% - 90%, 50 Ohm load at 1 Vpp, 3.8 ns, 10% - 90%, 50 Ohm load at 2.5 Vpp
Overshoot	3% (typical, 100 kHz, 1 Vpp, 50 Ohm Load)
Duty Cycle	0.001% - 99.999% Limited By Frequency
Jitter	300 ps + 0.05 ppm of period, 1 Vpp, 50 Ohm Load

## Pulse

Pulse width	32.6 ns, Min. Accuracy +/- (0.01%+ 1 ns)
Rise/Fall time (10% - 90%, typical)	16.8 ns - 22.4 ns
Duty Cycle	0.001% - 99.999%, 0.001% Resolution, Limited by Pulse Width
Overshoot	3% (typical, 100 kHz, 1 Vpp, 50 Ohm Load)
Jitter(pk-pk)	300 ps + 0.05 ppm of period, 1 Vpp, 50 Ohm Load

## Ramp/ Triangle Wave

Linearity	<= 1% of Vpp (typical, 1 kHz, 1 Vpp, 100% symmetric)
Symmetry	0% - 100%

## Harmonic Output

Order	10 Maximum
Type	Even, Odd, All

## Arbitrary Wave

Waveform length	16 k points
Vertical resolution	14 bits
Sample rate	30 MSa/s Arb Mode, 150 MSa/s DDS Mode
Min. Rise/Fall time	8 ns (typical)
Jitter(pk-pk)	300 ps, True Arb Mode, 67 ns DDS mode, pk-pk
Number of built in Arb waveforms	196 waveforms

## Noise Characteristics

-3 dB bandwidth	60 MHz
-----------------	--------

# SPECIFICATIONS

## DC Characteristics

Range	-10 V to +10 V HiZ Load -5 V to +5 V 50 Ohm Load
Accuracy	+/- (1% + 3 mV) HiZ Load

## Harmonic Output Characteristics

Order	16
Type	All, Even, Odd

## Output Characteristics

Range	2 mV – 20 Vpp ≤ 10 MHz HiZ load, 2 mV – 10 Vpp >10 MHz HiZ load. Values are halved into 50 Ω load
Accuracy	+/- (1% + 1 mVpp) 10 kHz sine wave, 0 V offset
Amplitude Flatness	+/- 0.3 dB, 50 Ω load, 2.5 Vpp (reference 10 kHz Sine wave)
Output impedance	50 Ω +/- 0.5 Ω at 10 kHz sine wave.
Output current	+/- 200 mA
Channel to channel Crosstalk	-60 dBc, 0 dBm, sine wave, 50 Ω load

## Modulation Characteristics – AM

Carrier	Sine, Square, Ramp, Arb
Modulation Source	Internal/External
Modulation Wave	Sine, Square, Ramp, Noise, Arb
Modulation Depth	0 – 120 %
Modulation Frequency	1 mHz – 20 kHz, Modulation source “internal”

## Modulation Characteristics – FM

Carrier	Sine, Square, Ramp, Arb
Modulation Source	Internal/External
Modulation Wave	Sine, Square, Ramp, Noise, Arb
Modulation Depth	0 – 0.5 * BW, BW is the max output frequency limited by the frequency settings
Modulation Frequency	1 mHz – 20 kHz, Modulation source “internal”

## Modulation Characteristics – PM

Carrier	Sine, Square, Ramp, Arb
Modulation Source	Internal / External
Modulating Waveform	Sine, Square, Ramp, Arb, Noise
Phase Deviation	0 Deg – 360 Deg
Modulation Frequency	1 mHz to 20 kHz with ‘internal’ modulation source

## Modulation Characteristics – ASK

Carrier	Sine, Square, Ramp, Arb
Modulation Source	Internal / External
Modulating Waveform	Square with 50 % duty cycle
Keying Frequency	1 mHz to 50 kHz Limited by frequency setting with ‘internal’ modulation source

## Modulation Characteristics – FSK

Carrier	Sine, Square, Ramp, Arb
Modulation Source	Internal / External
Modulating Waveform	Square with 50 % duty cycle
Modulation Frequency	1 mHz to 50 kHz with ‘internal’ modulation source

## Modulation Characteristics – PSK

Carrier	Sine, Square, Ramp, Arb
Modulation Source	Internal / External
Modulating Waveform	Square with 50 % duty cycle
Modulation Frequency	1 mHz to 50 kHz with ‘internal’ modulation source

## Modulation Characteristics – PWM

Carrier	Pulse
Modulation Source	Internal / External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulation Frequency	1 mHz to 1 MHz with 'internal' modulation source
Pulse Width Deviation Resolution	Minimum 6.67 ns

## Burst Characteristics

Carrier	Sine, Square, Ramp, Noise, Pulse, Arb
Type	Count (1 – 1 M cycles), Infinite, Gated
Carrier Frequency	2 mHz – Maximum output frequency
Stop/Start phase	0 Deg to 360 Deg
Internal Period	1 $\mu$ s – 1000 seconds
Trigger Source	Internal, External, Manual
Gated Source	Internal, External
Trigger Delay	Maximum of 100 seconds

## Sweep Characteristics

Carrier	Sine, Square, Ramp, Arb
Type	Linear, Log
Direction	Up, Down
Carrier Frequency	1 $\mu$ Hz – Maximum output frequency
Sweep Time	1 ms – 500 seconds
Trigger Source	Internal, External, Manual

## Frequency Counter Characteristics

Function	Frequency, Period, Positive / Negative Pulse Width, Duty Cycle
Coupling	DC, AC, HF REJ
Frequency Range	DC: 100 mHz – 200 MHz, AC: 10 Hz – 200 MHz
DC Input Amplitude	100 mV rms – +/- 2.5 V < 100 MHz 200 mV rms – +/- 2.5 V 100 MHz – 200 MHz
AC Input Amplitude	100 mV rms – 5Vp-p < 100 MHz 200 mV rms – 5Vp-p 100 MHz – 200 MHz
Input Impedance	1 M Ohm

## Reference Clock Input

Frequency	10 MHz
Amplitude	Minimum 1.4 Vp-p
Input Impedance	5 kOhm AC coupled

## Reference Clock Output

Frequency	10 MHz Synchronised to the internal reference clock
Amplitude	Minimum 2 Vp-p into high impedance load
Output Impedance	50 Ohms

## External Trigger Input

V in Low	-0.5 V to +0.8 V
V in High	+2 V to +5.5 V
Direction	Up, Down
Input Impedance	100 kOhms
Minimum Pulse Width	100 ns
Maximum Response Time	100 ns – Sweep, 600 ns – Burst

## Trigger Output

V out Low	Maximum 0.44 V at 8 mA
V out High	Minimum 3.8 V at -8 mA
Output Impedance	100 Ohms
Maximum Frequency	1 MHz

# SPECIFICATIONS

## Sync Output

V out Low	Maximum 0.44 V at 8 mA
V out High	Minimum 3.8 V at -8 mA
Output Impedance	100 Ohms
Maximum Frequency	10 MHz
Pulse Width	500 ns

## Modulation Input

Frequency	0 Hz to 50 kHz
Input Impedance	10 kOhm
Amplitude at 100 % Modulation Depth	Min 11 Vp-p, Typ 12 Vp-p, Max 13 Vp-p

## General Characteristics

### Power

Voltage	100 V to 240 V (+/-10 %) at 50 Hz / 60Hz 100 V to 120 V (+/-10 %) at 400 Hz
Power Consumption	Typical 21 W, Maximum 50 W

### Display

Color Depth	24 bit
Contrast Ratio	350:1
Luminance	300 cd/m <sup>2</sup>

### Environment

Operating Temperature	0 Deg C to 40 Deg C
Storage Temperature	-20 Deg C to 60 Deg C
Operating Humidity	5% to 90% ≤30 Deg C   5% to 50% >30 Deg C
Non-Operating Humidity	5% to 95%
Maximum Operating Altitude	3048 m ≤30 Deg C
Maximum Non-Operating Altitude	15000m

### Calibration

Calibration Interval	Annually
----------------------	----------

### Mechanical

Dimensions	W x D x H = 260.3 mm x 107.2 mm x 295.7 mm
Net Weight	3.43 kg
Gross Weight	4.35 kg

### Compliance

LVD	IEC61010-2:2010
EMC	EN61326-1:2013

## Ordering information

Models	T3AFG30 30 MHz
	T3AFG60 60 MHz
Standard Accessories	Quick Start Guide
	USB Cable
	Calibration Certificate
	Power Cord



# ABOUT TELEDYNE TEST TOOLS



## Company Profile

Teledyne LeCroy is a leading provider of oscilloscopes, protocol analyzers and related test and measurement solutions that enable companies across a wide range of industries to design and test electronic devices of all types. Since our founding in 1964, we have focused on creating products that improve productivity by helping engineers resolve design issues faster and more effectively. Oscilloscopes are tools used by designers and engineers to measure and analyze complex electronic signals in order to develop high-performance systems and to validate electronic designs in order to improve time to market.

The Teledyne Test Tools brand extends the Teledyne LeCroy product portfolio with a comprehensive range of test equipment solutions. This new range of products delivers a broad range of quality test solutions that enable engineers to rapidly validate product and design and reduce time-to-market. Designers, engineers and educators rely on Teledyne Test Tools solutions to meet their most challenging needs for testing, education and electronics validation.

## Location and Facilities

Headquartered in Chestnut Ridge, New York, Teledyne Test Tools and Teledyne LeCroy has sales, service and development subsidiaries in the US and throughout Europe and Asia. Teledyne Test Tools and Teledyne LeCroy products are employed across a wide variety of industries, including semiconductor, computer, consumer electronics, education, military/aerospace, automotive/industrial, and telecommunications.

Distributed by:

## Teledyne LeCroy (US Headquarters)

700 Chestnut Ridge Road  
Chestnut Ridge, NY, USA 10977-6499

Phone: 800-553-2769 or 845-425-2000  
Fax Sales: 845-578-5985  
Phone Support: 1-800-553-2769  
Email Sales: [contact.corp@teledynelecroy.com](mailto:contact.corp@teledynelecroy.com)  
Email Support: [support@teledynelecroy.com](mailto:support@teledynelecroy.com)  
Web Site: <http://teledynelecroy.com/>

## Teledyne LeCroy (European Headquarters)

Teledyne LeCroy GmbH  
Im Breitspiel 11c  
D-69126 Heidelberg, Germany

Phone: +49 6221 82700  
Fax: +49 6221 834655  
Phone Service: +49 6221 8270 85  
Phone Support: +49 6221 8270 28  
Email Sales: [contact.gmbh@teledynelecroy.com](mailto:contact.gmbh@teledynelecroy.com)  
Email Service: [service.gmbh@teledynelecroy.com](mailto:service.gmbh@teledynelecroy.com)  
Email Support: [tlc.t3.appsupport.eu@teledyne.com](mailto:tlc.t3.appsupport.eu@teledyne.com)  
Web Site: <http://teledynelecroy.com/germany>

[teledynelecroy.com](http://teledynelecroy.com)



© 2018 Teledyne Test Tools is a brand and trademark of Teledyne LeCroy Inc. All rights reserved. Specifications, prices, availability and delivery subject to change without notice. Product brand or brand names are trademarks or requested trademarks of their respective holders.

T3 stands for Teledyne Test Tools.