

4-2208157-1 ✓ ACTIVE

AMP | Heavy Duty Sealed Connector Series


TE Internal #: 4-2208157-1

Housing for Female Terminals, Wire-to-Wire, 4 Position, 9 mm [.354 in] Centerline, Sealable, Blue, Wire & Cable, Heavy Duty Sealed Connector Series

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > Heavy Duty Sealed Connector Series Housings

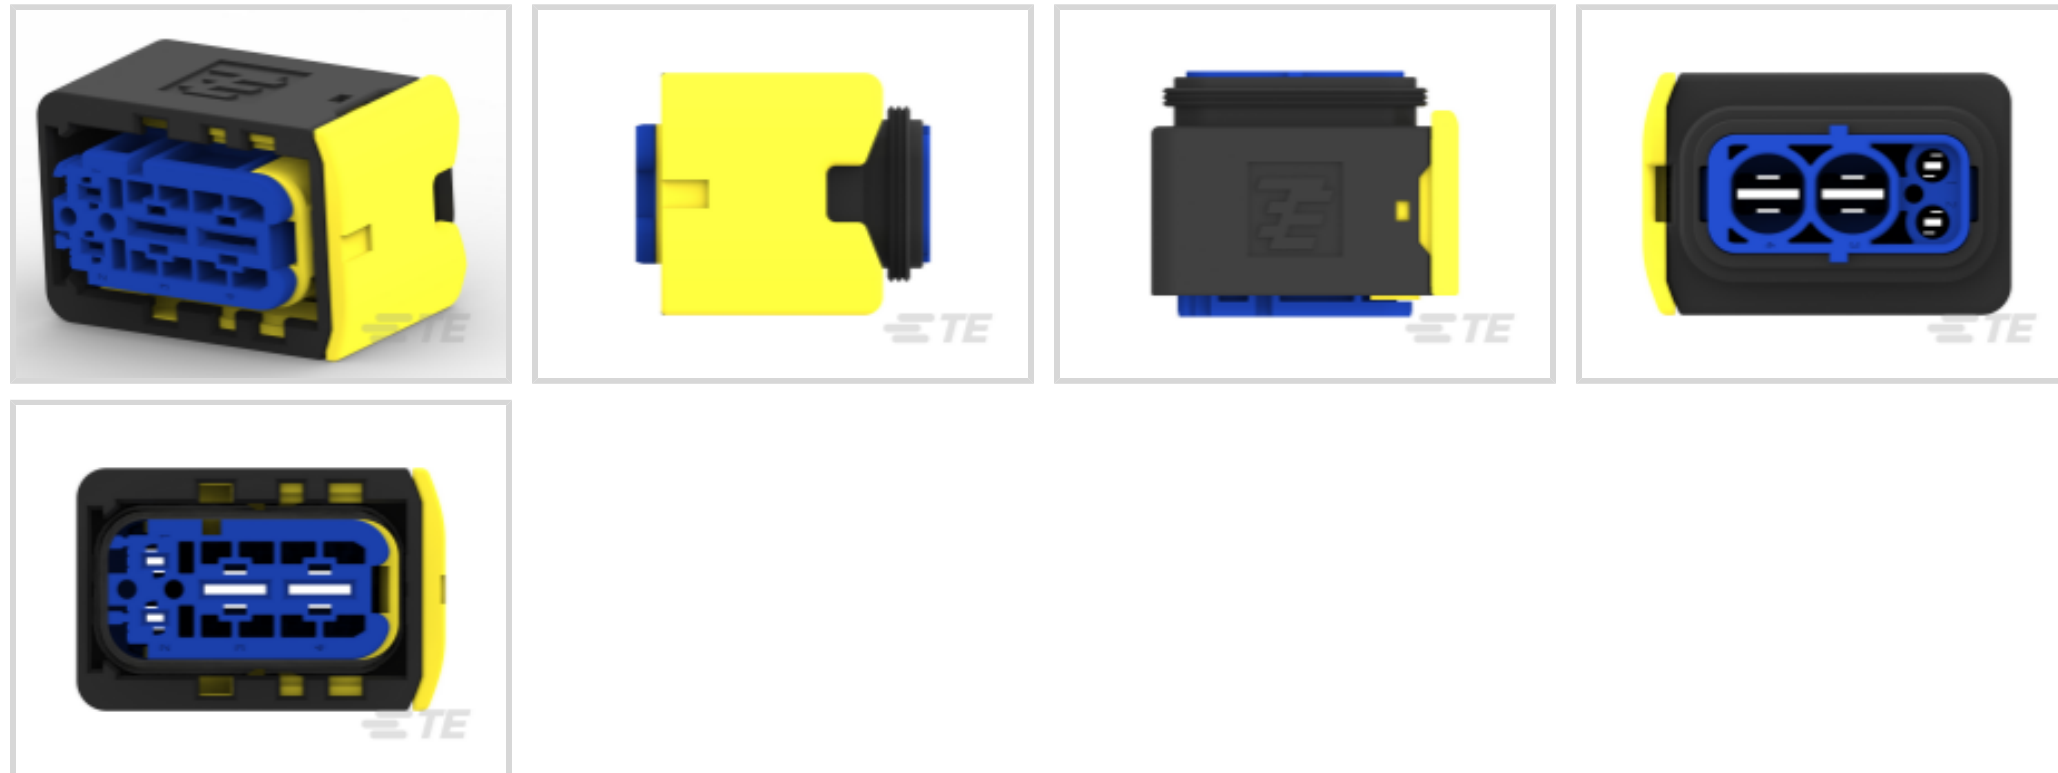

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **9 mm [.354 in]**

Sealable: **Yes**

[All Heavy Duty Sealed Connector Series Housings \(204\)](#)

## Features

### Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

### Configuration Features

Number of Positions	4
Number of Rows	2

### Electrical Characteristics

Operating Voltage	60 VDC
-------------------	--------



### Body Features

Cable Exit Angle	180°
Primary Product Color	Blue
Connector & Keying Code	D

### Contact Features

Contact Size	1.5K, 4.8K, 6.3mm
Contact Type	Receptacle
Mating Tab Width	1.6 mm, 5.8 mm [.062 in] [.228 in]
Contact Current Rating (Max)	20 A, 40 A

### Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

### Housing Features

Housing Material	PBT GF30
Centerline (Pitch)	9 mm [.354 in]

### Dimensions

Connector Height	31.2 mm [1.23 in]
Product Width	25.7 mm [1.01 in]
Product Length	54.1 mm [2.13 in]
Row-to-Row Spacing	6 mm [.236 in]
Wire Size	1.5 – 6 mm <sup>2</sup>

### Usage Conditions

Operating Temperature (Max)	140 °C [284 °F]
Operating Temperature Range	-40 – 140 °C [-40 – 284 °F]

### Operation/Application

Circuit Application	Power
---------------------	-------

### Industry Standards

Degree of Protection	IP67, IP69K
UL Flammability Rating	UL 94V-0



### Packaging Features

Packaging Quantity	300
Packaging Method	Carton

### Other

Serviceable	Yes
Connector Position Assurance Capable	No

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # CAT-H3399-B128  
Heavy Duty Sealed Connector Series Backshells

TE Part # 963530-1  
EINZELLEITERDICHTNG

TE Part # 1719043-1  
SINGLE WIRE SEAL, GREEN

TE Part # 964972-1  
EINZELLEITERDICHTNG

TE Part # 964971-1  
EINZELLEITERDICHTNG

TE Part # CAT-AM705-T273  
AMP MCP, RECEPTACLE AND TAB

TE Part # 2287497-1  
SINGLE WIRE SEAL, 1.5MM CONTACT SYSTEM

TE Part # 1394511-1  
EINZELLEITDICHTG, WS

TE Part # 1823111-1  
SINGLE WIRE SEAL, FOR WIRE 2.5 SQMM, BN

TE Part # 1394512-1  
EINZELLEITDICHTG, BL

TE Part # 2177018-1  
SINGLE WIRE SEAL, AMP MCP6.3/4.8K, YW

Also in the Series | **Heavy Duty Sealed Connector Series**

Automotive Connector Caps & Covers (25)

Automotive Housings(207)

Connector Seals & Cavity Plugs(5)

Data Connectivity Headers(2)

Data Connectivity Housings(16)

Other Automotive Connector Accessories(34)

PCB Headers & Receptacles(1)

Customers Also Bought





TE Part #788189-2  
CPC 17-3 RCPT ASY, REV SEX



TE Part #2-330648-1  
PIDG 22-16 22-18 MIL R 4; TAPE



TE Part #2177090-3  
STEEL, OUTER FERRULE, 8MM HV,  
25SQMM



TE Part #1-1633961-2  
CRIMPER, INSULATION F PREMIUM  
25SQMM




TE Part #1587940-3  
CABLE SEAL RETAINER, SIZE C




TE Part #2103013-3  
CABLE SEAL RETAINER, SIZE 2, OR,  
HVA280



TE Part #2208669-3  
8MM HV, CONTACT, ASSY

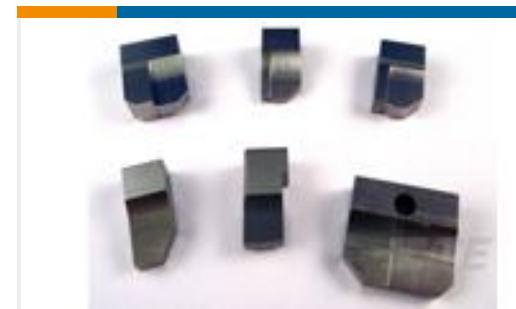

TE Part #4-1633932-0  
ANVIL, COMBINATION

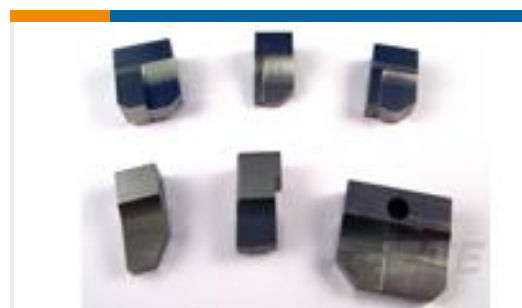

TE Part #464291-5  
ANVIL, SAND-BLASTED 12-10



TE Part #YHV280-2PM-P-4MM-B  
HVA280-2phm, pass, 4sqmm, Key B

## Documents

### Product Drawings

4POS, MIXED REC HSG, ASSY, SEALED, COD D

English

### CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_4-2208157-1\\_J.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_4-2208157-1\\_J.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_4-2208157-1\\_J.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages



[HDSCS Catalog](#)

English

---

[Product Specifications](#)

[Application Specification](#)

English