



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.01.16	
A1	N/A		尺寸变更	2024.07.18	阿 树

- Specifications(规格):
- 1.Voltage rating(额定电压):500V AC/DC
 - 2.Current rating(额定电流):1A AC/DC
 - 3.Withstanding voltage(耐压值):1000V AC/minute
 - 4.Insulation resistance(绝缘电阻): $\geq 1000M\Omega$ Min
 - 5.Contact resistance(接触电阻): $\leq 20m\Omega$ Max
 - 6.After environmental testing(环境测试后): $\leq 30m\Omega$ Max
 - 7.Temperature range(使用温度): $-45^{\circ}C-+125^{\circ}C$



- PART NO.:
X9127 W V S-XX A1-9T SN XX
- ① Series No
② Category:W-Aafer
③ Welding Board Angle:V-Straight 180°
④ Welding Way:S-SMT
⑤ Row No-Pin: XX-04P~26P
⑥ Special No:A1-With Single Gap
⑦ Material:9T-PA9T UL94V-0
⑧ Plating:SN-Bright Tin Plated
⑨ Color:RE-Red ; RD-Purplish red

X9127WVS-XXA1-9TSNRD		Purplish red	PA9T UL 94V-0	BRASS	Tin-Plated	
X9127WVS-XXA1-9TSNRE		RED				
PART NO.		COLOR	MATERIAL	MATERIAL (TERMINAL)	FINISH (TERMINAL)	
	DESIGN	桑 葚	VIEW: 	MODEL TYPE: 1.27mm Crimp Style Connector		
	CHECKED		UNIT: mm/in	PART NO.: X9127WVS-XXA1-9TSNRE		
	APPROVED		SIZE: A4	DWG NO.:		
TRIAL PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A1

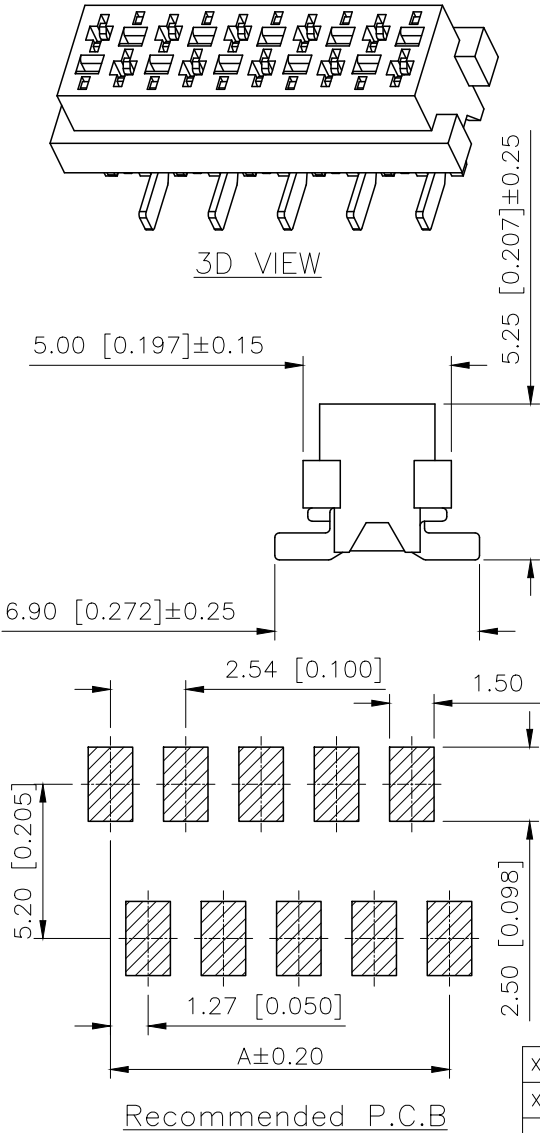


Recommended P.C.B

ANGULAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

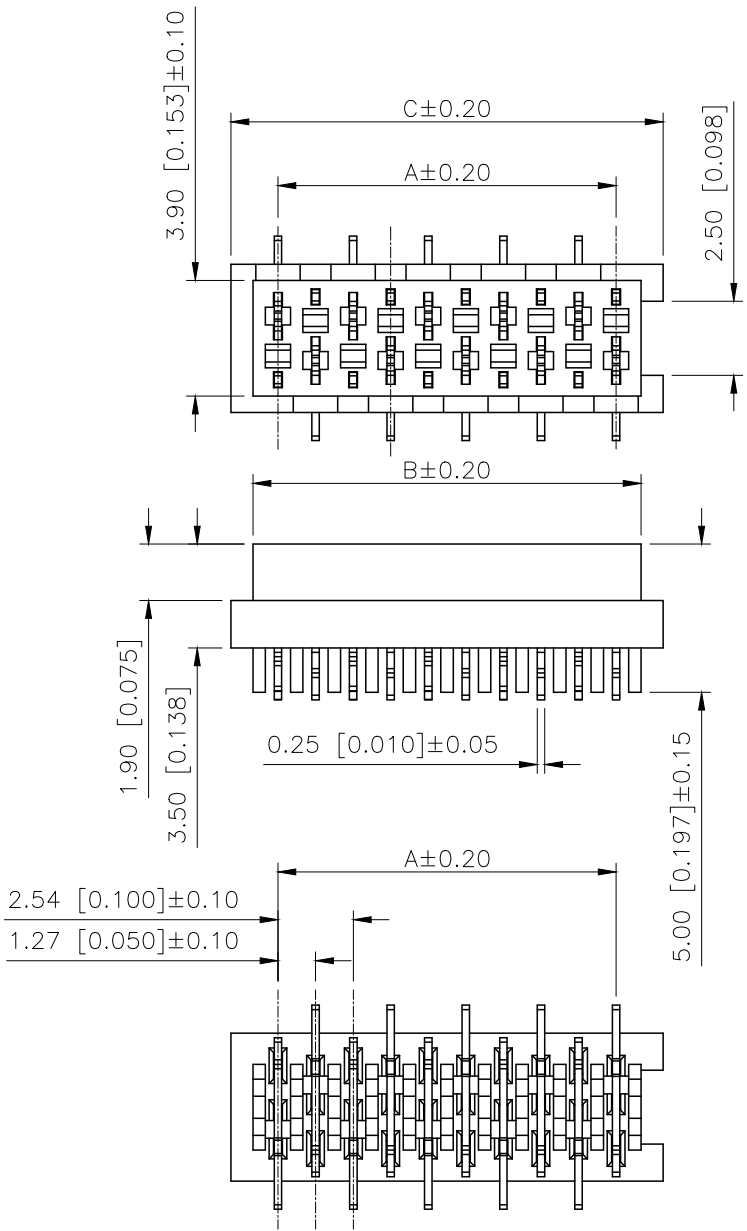

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
4	3.81	5.50	6.99	16	19.05	20.74	22.23
6	6.35	8.04	9.53	18	21.59	23.28	24.77
8	8.89	10.58	12.07	20	24.13	25.82	27.31
10	11.43	13.12	14.61	22	26.67	28.36	29.85
12	13.97	15.66	17.15	24	29.21	30.90	32.39
14	16.51	18.20	19.69	26	31.75	33.44	34.93