

REV. 0


DCO 15842

COIL: @ 25°C	
RESISTANCE	814 OHMS ±10%
NOMINAL VOLTAGE	24 VDC
MUST OPERATE	12.4 VDC
MUST RELEASE	

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE 3.5 MS MAX  
 RELEASE 3 MS MAX  
 CONTACT BOUNCE 1 MS MAX


CUSTOMER DATA SHEET

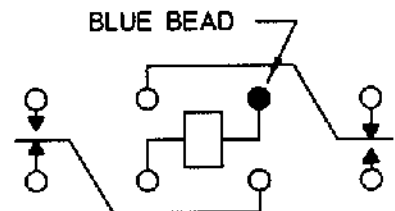

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
 2 AMPS 28 VDC RESISTIVE  
 100,000 OPERATIONS

DR. B.D. 9/23/99 CK64# 9/23/99



CUST. P & B  
 CUST. NO. HCM-11DB-24 REV.

'HFW' RELAY

HFW1196S04