

Miniature Fuse, 5 x 20 mm, Quick-Acting F, NF, 220 VAC



NF C 93-435 · 220 VAC · Quick-Acting F



GAM
T1 NNO

Description

- Low Breaking Capacity

Standards

- NF C 93-435 - Model HA21
- Contrôle de Conformité de Qualité (CCQ)

Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	32 - 220 VAC
Rated current	0.02 - 20 A
Breaking Capacity	60 A - 300 A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	1.2 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	HA21, Rated current

Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11

Dimension




Pre-Arcing Time

Rated Current In 1.15 x In min. 1.65 x In max. 3.0 x In max.

0.02 A - 6.3 A	60 min	60 min	200 ms
----------------	--------	--------	--------

Time-Current-Curves

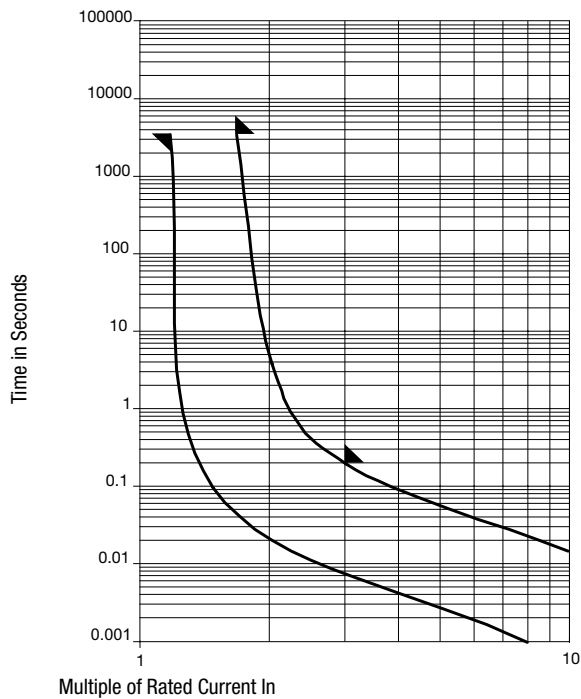

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I_n typ. [mV]	Power Dissipation 1.15 I_n typ. [mW]	Melting I ² t 10.0 I_n typ. [A ² s]	 GAM T1 NNO			Order Number
0.02	220	1)	790	21	0.00027	●	●	●	7010.3110
0.031	220	1)	1400	60	0.00029	●	●	●	7010.3120
0.04	220	1)	2400	155	0.00017	●	●	●	7010.3130
0.05	220	1)	3300	260	0.00017	●	●	●	7010.3140
0.063	220	1)	2250	220	0.00046	●	●	●	7010.3150
0.08	220	1)	1750	215	0.0012	●	●	●	7010.3160
0.1	220	1)	1200	175	0.003	●	●	●	7010.3210
0.125	220	1)	1550	295	0.0037	●	●	●	7010.3220
0.16	220	1)	1300	320	0.0076	●	●	●	7010.3230
0.2	220	1)	1200	375	0.012	●	●	●	7010.3240
0.25	220	1)	1000	400	0.025	●	●	●	7010.3250
0.31	220	1)	475	225	0.018	●	●	●	7010.3260
0.4	220	1)	310	185	0.054	●	●	●	7010.3270
0.5	220	1)	285	215	0.096	●	●	●	7010.3280
0.63	220	1)	310	300	0.14	●	●	●	7010.3290
0.8	220	1)	270	335	0.3	●	●	●	7010.3310
1	220	1)	150	215	0.81	●	●	●	7010.3410
1.25	220	1)	325	660	0.47	●	●	●	7010.3420
1.6	125	2)	300	790	0.93	●	●	●	7010.3430
2	125	2)	185	560	1.9	●	●	●	7010.3440
2.5	125	2)	285	1250	2.5	●	●	●	7010.3450
3.15	125	2)	145	670	7.1	●	●	●	7010.3460
4	125	2)	165	1050	10	●	●	●	7010.3470
5	125	2)	165	1300	18	●	●	●	7010.3480
6.3	125	2)	130	1200	41	●	●	●	7010.3510
8	32	3)	120	1400	79	●	●	●	7010.3520
10	32	3)	120	1750	145	●	●	●	7010.3530
12.5	32	3)	115	2000	300	●	●	●	7010.3620
15	32	3)	125	2750	460	●	●	●	7010.3630

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.15 I _n typ. [mW]	Melting I ² t 10.0 Intyp. [A ² s]	Order Number
20	32	3)	95	2600	1800	7010.3650

Most Popular:

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) 60 A @ 220 VAC , p.f. = 0.6 - 0.8
- 2) 300 A @ 125 VAC , p.f. ≥ 0.95 / Schurter: 60 A @ 220 VAC
- 3) 300 A @ 32 VAC , p.f. ≥ 0.95

Packaging Unit Small Box Pack (10 pcs.)