

# SN55ALS192, SN75ALS192 QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C - JULY 1985 - REVISED MAY 1995

- Meets or Exceeds the Requirements of ANSI Standard EIA/TIA-422-B and ITU Recommendation V.11
- Designed to Operate Up to 20 Mbaud
- 3-State TTL Compatible
- Single 5-V Supply Operation
- High Output Impedance in Power-Off Condition
- Complementary Output Enable Inputs
- Improved Replacement for the AM26LS31


## description

These four differential line drivers are designed for data transmission over twisted-pair or parallel-wire transmission lines. They meet the requirements of ANSI Standard EIA/TIA-422-B and ITU Recommendations V.11 and are compatible with 3-state TTL circuits. Advanced low-power Schottky technology provides high speed without the usual power penalties. Standby supply current is typically only 26 mA, while typical propagation delay time is less than 10 ns.


High-impedance inputs maintain low input currents, less than 1  $\mu$ A for a high level and less than 100  $\mu$ A for a low level. Complementary enable inputs, G and  $\bar{G}$ , allow these devices to be enabled at either a high input level or low input level. The SN75ALS192 is capable of data rates in excess of 20 megabits per second and is designed to operate with the SN75ALS193 quadruple line receiver. The SN55ALS192 is also capable of data rates in excess of 20 megabits per second and designed to operate with the SN55ALS193; however, it may be limited to a lower bit rate based on the temperature (refer to the dissipation rating table and Figure 15).

The SN55ALS192 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN75ALS192 is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

SN55ALS192... J OR W PACKAGE  
SN75ALS192... D OR N PACKAGE  
(TOP VIEW)



SN55ALS192... FK PACKAGE  
(TOP VIEW)



NC - No internal connection

FUNCTION TABLE  
(each driver)

INPUT A	ENABLES		OUTPUTS	
	G	$\bar{G}$	Y	Z
H	H	X	H	L
L	H	X	L	H
H	X	L	H	L
L	X	L	L	H
X	L	H	Z	Z

H = high level, L = low level,  
Z = high impedance (off), X = irrelevant

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 1995, Texas Instruments Incorporated

2-747


# SN55ALS192, SN75ALS192 QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C - JULY 1985 - REVISED MAY 1995

## logic symbol†

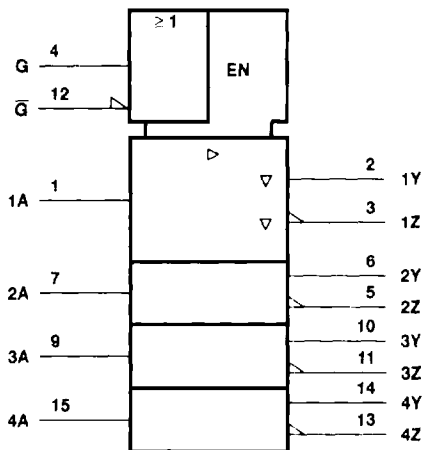


## logic diagram (positive logic)

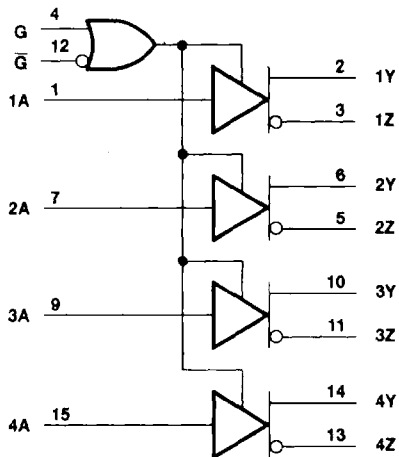

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for the D, J, N, and W packages.

## schematics of inputs and outputs

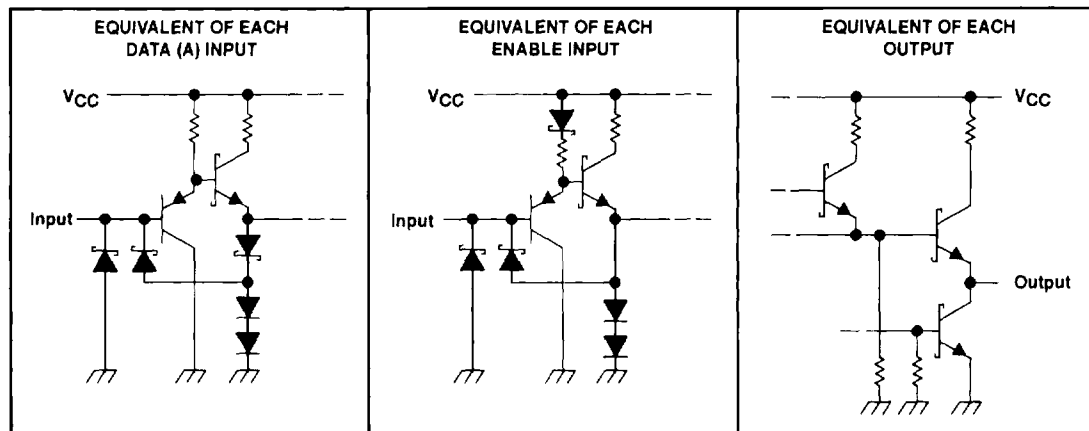

# SN55ALS192, SN75ALS192 QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C - JULY 1985 - REVISED MAY 1995

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, $V_{CC}$ (see Note 1)	7 V
Input voltage, $V_I$	7 V
Off-state output voltage	6 V
Continuous total dissipation	See Dissipation Rating Table
Operating free-air temperature range, $T_A$ : SN55ALS192	-55°C to 125°C
SN75ALS192	0°C to 70°C
Storage temperature range, $T_{stg}$	-65°C to 150°C
Case temperature for 60 seconds, $T_C$ : FK package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package	300°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, N, or W package	260°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values except differential output voltage,  $V_{OD}$ , are with respect to network ground terminal.

**DISSIPATION RATING TABLE**

PACKAGE	$T_A \leq 25^\circ\text{C}$	DERATING FACTOR	$T_A = 70^\circ\text{C}$	$T_A = 125^\circ\text{C}$
	POWER RATING	ABOVE $T_A = 25^\circ\text{C}$	POWER RATING	POWER RATING
D	950 mW	7.6 mW/°C	608 mW	N/A
FK	1375 mW	11.0 mW/°C	880 mW	275 mW
J†	1375 mW	11.0 mW/°C	880 mW	275 mW
N	1150 mW	9.2 mW/°C	736 mW	N/A
W	1000 mW	8.0 mW/°C	640 mW	200 mW

† In the J package, the SN55ALS192 chips are either alloy or silver glass mounted.

## recommended operating conditions

	SN55ALS192			SN75ALS192			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, $V_{CC}$	4.5	5	5.5	4.75	5	5.25	V
High level input voltage, $V_{IH}$	2			2			V
Low-level input voltage, $V_{IL}$	0.8			0.8			V
High-level output current, $I_{OH}$	-20			-20			mA
Low-level output current, $I_{OL}$	20			20			mA
Operating free-air temperature, $T_A$	-55		125	0		70	°C



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# SN55ALS192, SN75ALS192 QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C - JULY 1985 - REVISED MAY 1995

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN55ALS192			SN75ALS192			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
$V_{IK}$ Input clamp voltage	$V_{CC} = \text{MIN}$ , $I_I = -18 \text{ mA}$			-1.5			-1.5	V
$V_{OH}$ High-level output voltage	$V_{CC} = \text{MIN}$ , $I_{OH} = -20 \text{ mA}$	2.4			2.5			V
$V_{OL}$ Low-level output voltage	$V_{CC} = \text{MIN}$ , $I_{OL} = 20 \text{ mA}$			0.5			0.5	V
$V_O$ Output voltage	$V_{CC} = \text{MAX}$ , $I_O = 0$	0		6	0		6	V
$ V_{OD1} $ Differential output voltage	$V_{CC} = \text{MIN}$ , $I_O = 0$	1.5		6	1.5		6	V
$ V_{OD2} $ Differential output voltage	$R_L = 100 \Omega$ , See Figure 1	$1/2 V_{OD1}$ or $2^{\S}$			$1/2 V_{OD1}$ or $2^{\S}$			V
$\Delta V_{OD} $ Change in magnitude of differential output voltage¶	$R_L = 100 \Omega$ , See Figure 1			$\pm 0.2$			$\pm 0.2$	V
$V_{OC}$ Common-mode output voltage#				$\pm 3$			$\pm 3$	V
$\Delta V_{OC} $ Change in magnitude of common-mode output voltage¶				$\pm 0.2$			$\pm 0.2$	V
$I_O$ Output current with power off	$V_{CC} = 0$	$V_O = 6 \text{ V}$		100			100	$\mu\text{A}$
		$V_O = -0.25 \text{ V}$		-100			-100	
$I_{OZ}$ Off-state (high-impedance state) output current	$V_{CC} = \text{MAX}$	$V_O = 0.5 \text{ V}$		-20			-20	$\mu\text{A}$
		$V_O = 2.5 \text{ V}$		20			20	
$I_I$ Input current at maximum input voltage	$V_{CC} = \text{MAX}$ , $V_I = 7 \text{ V}$			100			100	$\mu\text{A}$
$I_{IH}$ High-level input current	$V_{CC} = \text{MAX}$ , $V_I = 2.7 \text{ V}$			20			20	$\mu\text{A}$
$I_{IL}$ Low-level input current	$V_{CC} = \text{MAX}$ , $V_I = 0.4 \text{ V}$			-200			-200	$\mu\text{A}$
$I_{OS}$ Short-circuit output current	$V_{CC} = \text{MAX}$	-30		-150	-30		-150	mA
$I_{CC}$ Supply current (all drivers)	$V_{CC} = \text{MAX}$ , All outputs disabled		26	45		26	45	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at  $V_{CC} = 5 \text{ V}$  and  $T_A = 25^\circ\text{C}$ .

§ The minimum  $V_{OD2}$  with a  $100\text{-}\Omega$  load is either  $1/2 V_{OD1}$  or  $2 \text{ V}$ , whichever is greater.

¶  $|V_{OD}|$  and  $|V_{OC}|$  are the changes in magnitude of  $V_{OD}$  and  $V_{OC}$ , respectively, that occur when the input is changed from a high level to a low level.

# In ANSI Standard EIA/TIA-422-B,  $V_{OC}$ , which is the average of the two output voltages with respect to ground, is called output offset voltage,  $V_{OS}$ .

|| Not more than one output should be shorted at a time, and duration of the short circuit should not exceed one second.

## switching characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^\circ\text{C}$ (see Figure 2)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH}$ Propagation delay time, low-to-high-level output	S1 and S2 open, $C_L = 30 \text{ pF}$		6	13	ns
$t_{PHL}$ Propagation delay time, high-to-low-level output			9	14	ns
Output-to-output skew				3	6
$t_{PZH}$ Output enable time to high level	S1 open and S2 closed		11	15	ns
$t_{PZL}$ Output enable time to low level	S1 closed and S2 open		16	20	ns
$t_{PHZ}$ Output disable time from high level	S1 open and S2 closed, $C_L = 10 \text{ pF}$		8	15	ns
$t_{PLZ}$ Output disable time from low level	S1 and S2 closed, $C_L = 10 \text{ pF}$		18	20	ns



POST OFFICE BOX 655303 • DALLAS, TEXAS 75266

# SN55ALS192, SN75ALS192 QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C - JULY 1985 - REVISED MAY 1995

## PARAMETER MEASUREMENT INFORMATION


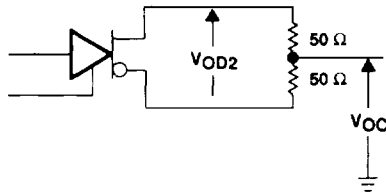



Figure 1. Differential and Common-Mode Output Voltages

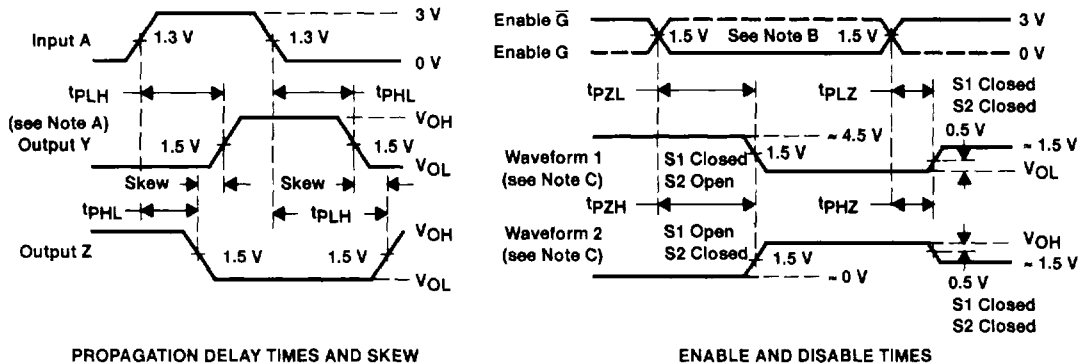

PROPAGATION DELAY TIMES AND SKEW

ENABLE AND DISABLE TIMES

## VOLTAGE WAVEFORMS

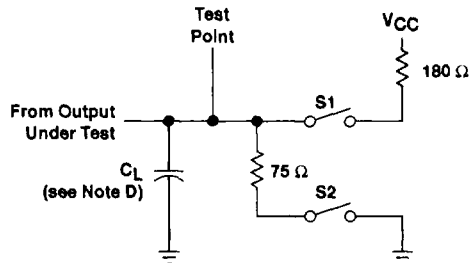

TEST CIRCUIT

- NOTES: A. When measuring propagation delay times and skew, switches S1 and S2 are open.  
 B. Each enable is tested separately.  
 C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.  
 D.  $C_L$  includes probe and jig capacitance.  
 E. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_r \leq 15$  ns, and  $t_f \leq 6$  ns.





Figure 2. Test Circuit and Voltage Waveforms



# SN55ALS192, SN75ALS192 QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C – JULY 1985 – REVISED MAY 1995

## TYPICAL CHARACTERISTICS†

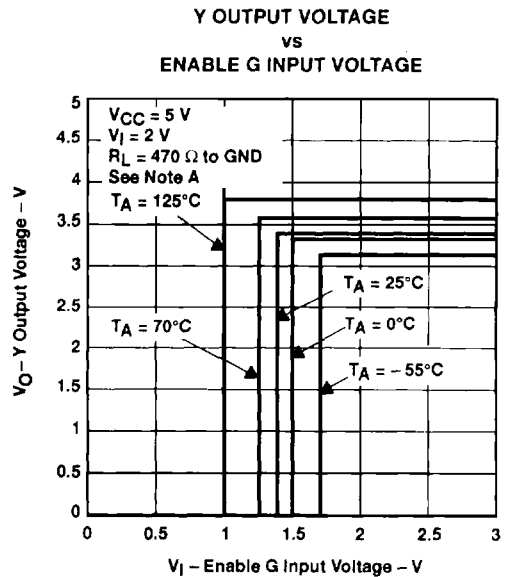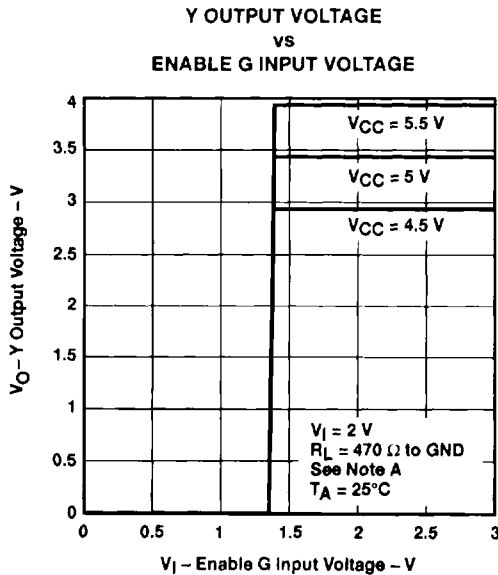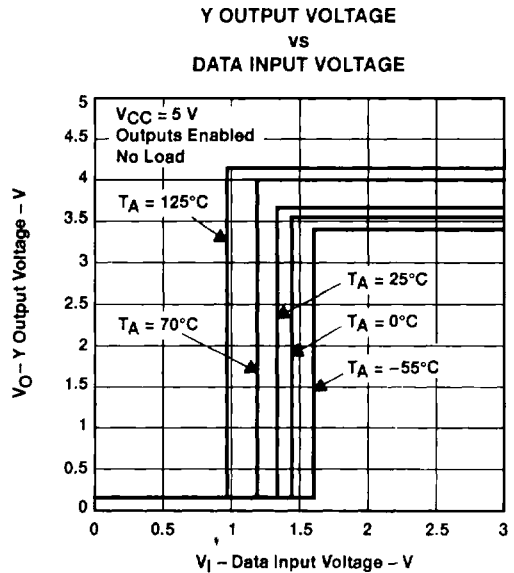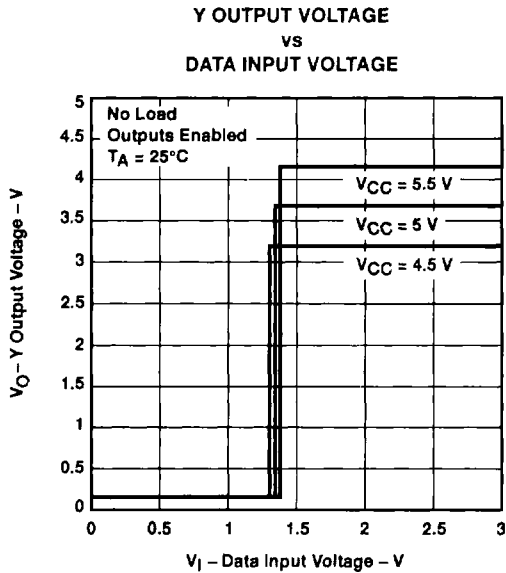





NOTE A: The A input is connected to  $V_{CC}$  during the testing of the Y outputs and to ground during the testing of the Z outputs.

† Data for temperatures below  $0^{\circ}\text{C}$  and above  $70^{\circ}\text{C}$  and below 4.75 V and above 5.25 V are applicable to SN55ALS192 circuits only.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TYPICAL CHARACTERISTICS†

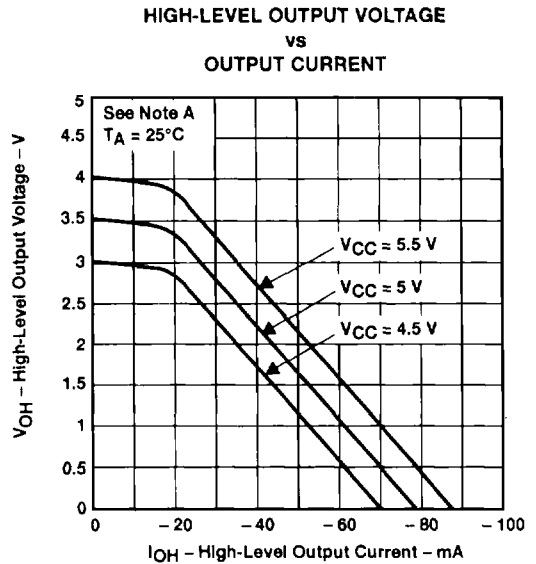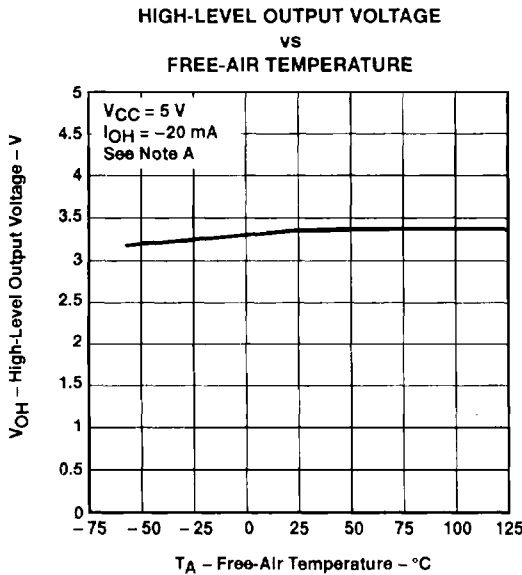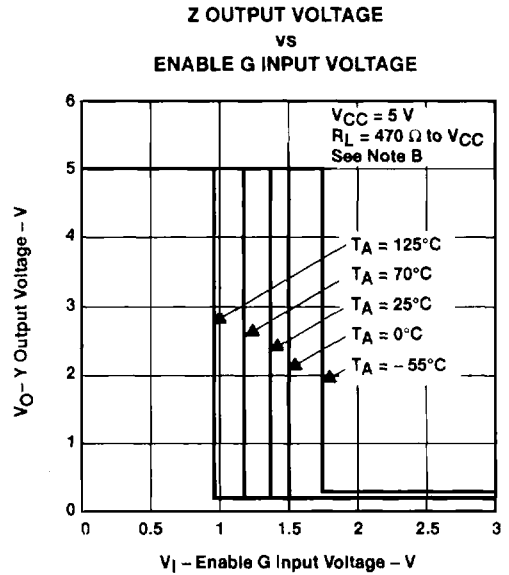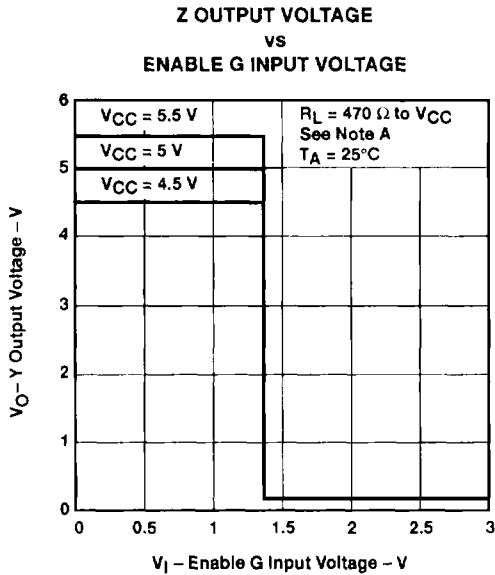

† Data for temperatures below 0°C and above 70°C, and below 4.75 V and above 5.25 V, are applicable to SN55ALS192 circuits only.  
 NOTES: A. The A input is connected to V<sub>CC</sub> during the testing of the Y outputs and to ground during the testing of the Z outputs.  
 B. The A input is connected to GND during the testing of the Y outputs and to V<sub>CC</sub> during the testing of the Z outputs.

# SN55ALS192, SN75ALS192 QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C - JULY 1985 - REVISED MAY 1995

## TYPICAL CHARACTERISTICS†

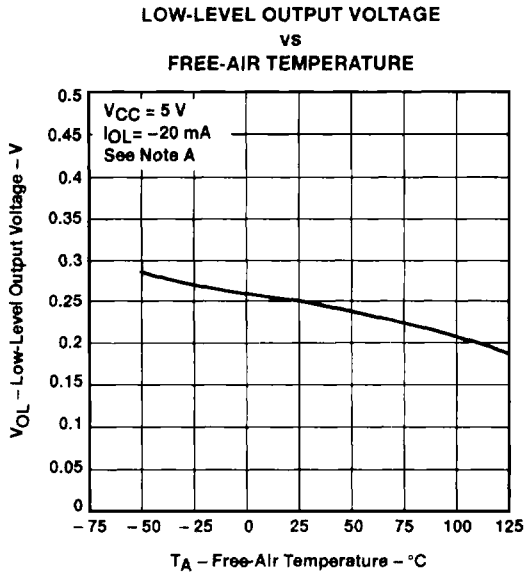


Figure 11

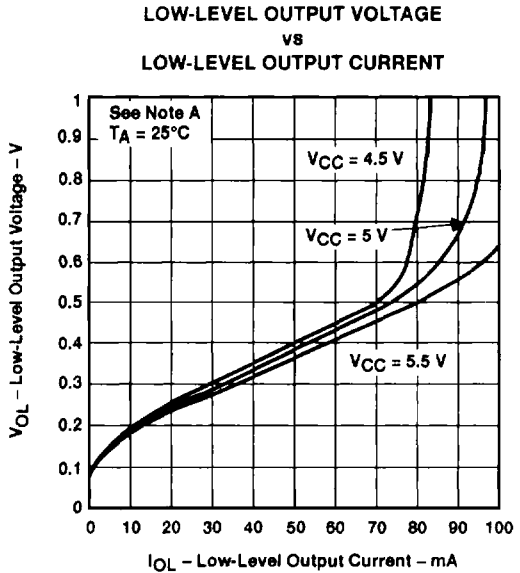


Figure 12

NOTE A: The A input is connected to GND during the testing of the Y outputs and to  $V_{CC}$  during the testing of the Z outputs.

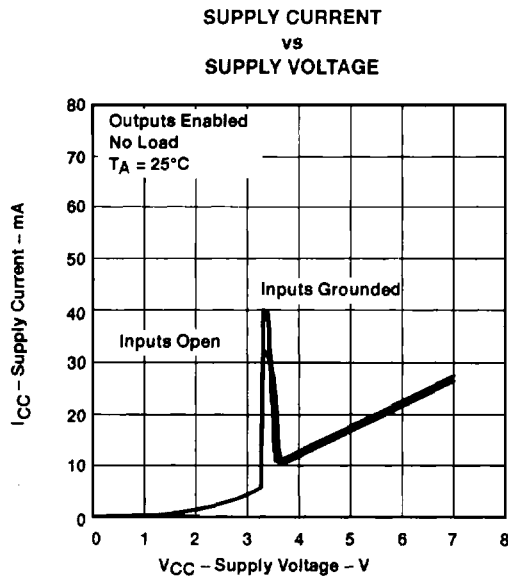


Figure 13

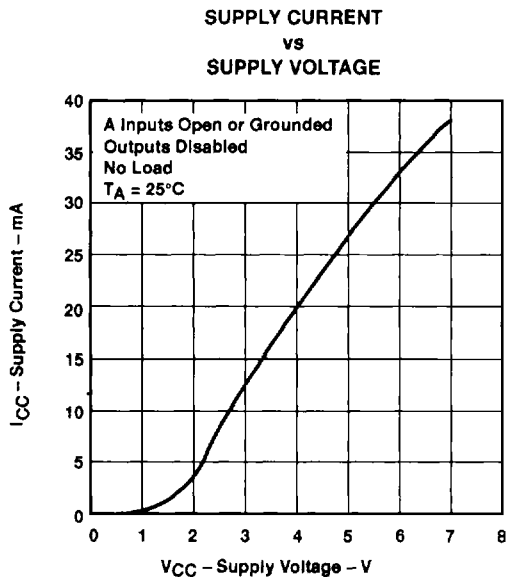


Figure 14

† Data for temperatures below 0°C and above 70°C, and below 4.75 V and above 5.25 V, are applicable to SN55ALS192 circuits only.



SN55ALS192, SN75ALS192  
QUADRUPLE DIFFERENTIAL LINE DRIVERS

SLLS007C - JULY 1985 - REVISED MAY 1995

TYPICAL CHARACTERISTICS

SUPPLY CURRENT  
vs  
FREQUENCY

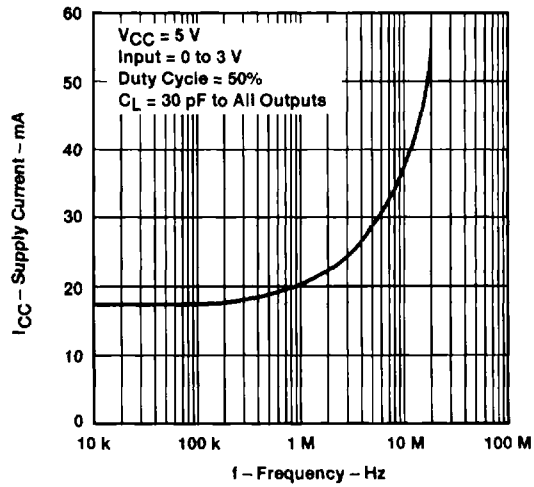


Figure 15

