


UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block



3046676

<https://www.phoenixcontact.com/us/products/3046676>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Component terminal block, The max. current is determined by the diode. Installed: diode 1300 V 1 A, reverse voltage: 1300 V, maximum continuous current 0.5 A., with integrated diode, nominal current: 0.5 A, connection method: Screw connection, 1st and 2nd level, Rated cross section: 2.5 mm², cross section: 0.14 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Design width of just 5.2 mm

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3046676 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE01 |
| Product key | BE1172 |
| Catalog page | Page 153 (C-1-2019) |
| GTIN | 4017918997205 |
| Weight per piece (including packing) | 16.19 g |
| Weight per piece (excluding packing) | 16.19 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |

UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block



3046676

<https://www.phoenixcontact.com/us/products/3046676>

Technical data

Notes

| | |
|---------|--|
| General | The max. current is determined by the diode. Installed: diode 1300 V 1 A, reverse voltage: 1300 V, maximum continuous current 0.5 A. |
|---------|--|

Product properties

| | |
|-----------------------|--------------------------|
| Product type | Component terminal block |
| Number of connections | 4 |
| Number of rows | 2 |
| Potentials | 2 |

Data management status

| | |
|------------------|----|
| Article revision | 08 |
|------------------|----|

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated insulation voltage | 500 V |
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 0.77 W |

Connection data

| | |
|---------------------------------|---------------------|
| Number of connections per level | 2 |
| Nominal cross section | 2.5 mm ² |

1st and 2nd level

| | |
|---|--|
| Screw thread | M3 |
| Tightening torque | 0.5 ... 0.6 Nm |
| Stripping length | 9 mm |
| Internal cylindrical gage | A3 |
| Conductor cross section rigid | 0.14 mm ² ... 4 mm ² |
| Cross section AWG | 26 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| 2 conductors with same cross section, solid | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1.5 mm ² |

UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block



3046676

<https://www.phoenixcontact.com/us/products/3046676>

| | |
|-----------------------|---------------------|
| Nominal current | 0.5 A |
| Maximum load current | 0.5 A |
| Nominal cross section | 2.5 mm ² |
| Component type | Diode 1N4007 |
| Reverse voltage | 1300 V |

Dimensions

| | |
|--------------------|---------|
| Width | 5.2 mm |
| End cover width | 2.2 mm |
| Height | 69.9 mm |
| Depth | 64.4 mm |
| Depth on NS 35/7,5 | 65 mm |
| Depth on NS 35/15 | 72.5 mm |

Material specifications

| | |
|--|-----------------|
| Color | gray (RAL 7042) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Electrical tests

Surge voltage test

| | |
|--|-------------|
| Test voltage setpoint | 7.3 kV |
| Result | Test passed |
| Short-time withstand current 2.5 mm ² | 0.3 kA |
| Short-time withstand current 4 mm ² | 0.48 kA |
| Result | Test passed |

Power-frequency withstand voltage

| | |
|-----------------------|-------------|
| Test voltage setpoint | 1.89 kV |
| Result | Test passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block



3046676

<https://www.phoenixcontact.com/us/products/3046676>

Mechanical tests

Mechanical strength

| | |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

Attachment on the carrier

| | |
|-------------------------|-------------|
| DIN rail/fixing support | NS 35 |
| Test force setpoint | 1 N |
| Result | Test passed |

Test for conductor damage and slackening

| | |
|--------------------------------|-------------------------------|
| Rotation speed | 10 rpm |
| Revolutions | 135 |
| Conductor cross section/weight | 0.14 mm ² / 0.2 kg |
| | 2.5 mm ² / 0.7 kg |
| | 4 mm ² / 0.9 kg |
| Result | Test passed |

Environmental and real-life conditions

Needle-flame test

| | |
|------------------|-------------|
| Time of exposure | 30 s |
| Result | Test passed |

Oscillation/broadband noise

| | |
|------------------------|---|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Spectrum | Service life test category 1, class B, body mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$ |
| ASD level | 0.02g ² /Hz |
| Acceleration | 0.8g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Half-sine |
| Acceleration | 5g |
| Shock duration | 30 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Ambient conditions

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
|---------------------------------|--|

UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block



3046676

<https://www.phoenixcontact.com/us/products/3046676>

| | |
|--|---|
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |
| Thread type | () |


UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block

3046676

<https://www.phoenixcontact.com/us/products/3046676>

Drawings

Circuit diagram

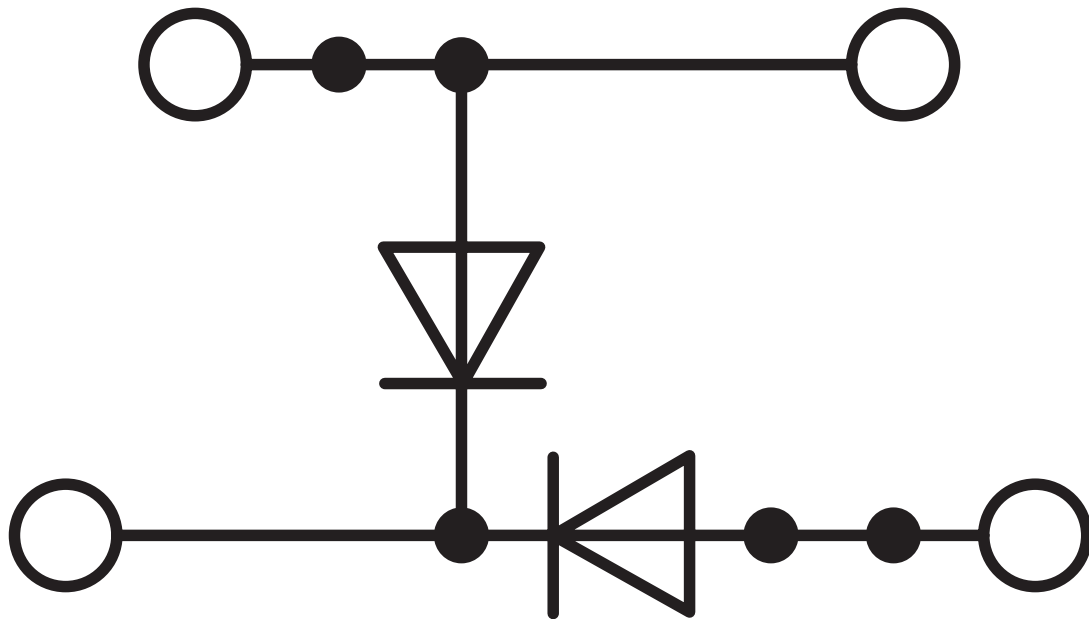

UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block





3046676


<https://www.phoenixcontact.com/us/products/3046676>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3046676>

|  CSA Approval ID: 13631 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 300 V | 1 A | 26 - 12 | - |
| Use group C | 300 V | 1 A | 26 - 12 | - |

|  EAC Approval ID: RU C-DE.BL08.B.00534 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 300 V | 20 A | 26 - 12 | - |
| Current determined by the diode | 300 V | 0.5 A | 26 - 12 | - |
| Use group C | 300 V | 20 A | 26 - 12 | - |
| Current determined by the diode | 300 V | 0.5 A | 26 - 12 | - |
| Use group D | 600 V | 5 A | 26 - 12 | - |
| Current determined by the diode | 600 V | 0.5 A | 26 - 12 | - |

UTT8 2,5-2DIO/O-UL/UR-UL - Component terminal block



3046676

<https://www.phoenixcontact.com/us/products/3046676>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141127 |
| ECLASS-12.0 | 27141127 |
| ECLASS-13.0 | 27250114 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000903 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

UTT 2,5-2DIO/O-UL/UR-UL - Component terminal block



3046676

<https://www.phoenixcontact.com/us/products/3046676>

Environmental product compliance

EU RoHS

| | |
|---|------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c), 7(a) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | cd821eb0-c685-42cf-aeb0-5804e1dfbd87 |

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com