

MLFB-Ordering data

6SL3220-3YH66-1CP0



Figure similar

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

| Rated data | | | General tech. specifications | |
|-------------------------------------|---------------------------|-----------|--|--|
| Input | | | Power factor λ | 0.75 ... 0.93 |
| Number of phases | 3 AC | | Offset factor $\cos \varphi$ | 0.96 |
| Line voltage | 500 ... 690 V +10 % -10 % | | Efficiency η | 0.98 |
| Line frequency | 47 ... 63 Hz | | Sound pressure level (1m) | 74 dB |
| Rated voltage | 690V IEC | 600V NEC | Power loss | 8.828 kW |
| Rated current (LO) | 679.00 A | 665.00 A | Filter class (integrated) | RFI suppression filter for Category C3 |
| Rated current (HO) | 494.00 A | 543.00 A | EMC category (with accessories) | Category C3 |
| Output | | | Ambient conditions | |
| Number of phases | 3 AC | | Standard board coating type | Class 3C2, according to IEC 60721-3-3: 2002 |
| Rated voltage | 690V IEC | 600V NEC | Cooling | Air cooling using an integrated fan |
| Rated power (LO) | 560.00 kW | 600.00 hp | Cooling air requirement | 0.450 m³/s (15.892 ft³/s) |
| Rated power (HO) | 500.00 kW | 500.00 hp | Installation altitude | 1000 m (3280.84 ft) |
| Rated current (LO) | 580.00 A | 610.00 A | Ambient temperature | |
| Rated current (HO) | 520.00 A | 523.00 A | Operation | 0 ... 45 °C (32 ... 113 °F) |
| Rated current (IN) | 654.00 A | | Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Max. output current | 864.00 A | | Storage | -25 ... 55 °C (-13 ... 131 °F) |
| Pulse frequency | 2 kHz | | Relative humidity | |
| Output frequency for vector control | 0 ... 100 Hz | | Max. operation | 95 % At 40 °C (104 °F), condensation and icing not permissible |
| Output frequency for V/f control | 0 ... 100 Hz | | | |

Overload capability

Low Overload (LO)

110% base load current IL for 60 s in a 300 s cycle time

High Overload (HO)

150% x base load current IH for 60 s within a 600 s cycle time



Figure similar

Mechanical data

| | |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Size | FSJ |
| Net weight | 236 kg (520.29 lb) |
| Width | 801 mm (31.54 in) |
| Height | 1621 mm (63.82 in) |
| Depth | 393 mm (15.47 in) |

Inputs / outputs

Standard digital inputs

| | |
|----------------------|-------|
| Number | 6 |
| Switching level: 0→1 | 11 V |
| Switching level: 1→0 | 5 V |
| Max. inrush current | 15 mA |

Fail-safe digital inputs

| | |
|--------|---|
| Number | 1 |
|--------|---|

Digital outputs

| | |
|------------------------------------|----------------|
| Number as relay changeover contact | 2 |
| Output (resistive load) | DC 30 V, 5.0 A |
| Number as transistor | 0 |

Analog / digital inputs

| | |
|------------|------------------------|
| Number | 2 (Differential input) |
| Resolution | 10 bit |

Switching threshold as digital input

| | |
|-----|-------|
| 0→1 | 4 V |
| 1→0 | 1.6 V |

Analog outputs

| | |
|--------|-------------------------|
| Number | 1 (Non-isolated output) |
|--------|-------------------------|

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C

Closed-loop control techniques

| | |
|---|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC) | Yes |
| V/f ECO linear / square-law | Yes |
| Sensorless vector control | Yes |
| Vector control, with sensor | No |
| Encoderless torque control | Yes |
| Torque control, with encoder | No |

Communication

| | |
|---------------|-------------|
| Communication | PROFIBUS DP |
|---------------|-------------|

Connections

Signal cable

| | |
|-------------------------|--|
| Conductor cross-section | 0.15 ... 1.50 mm ² (AWG 24 ... AWG 16) |
|-------------------------|--|

Line side

| | |
|-------------------------|---|
| Version | M12 screw |
| Conductor cross-section | 240.00 mm ² (MCM 4 x 500 ... MCM 6 x 500) |

Motor end

| | |
|-------------------------|---|
| Version | M12 screw |
| Conductor cross-section | 240.00 mm ² (MCM 4 x 500 ... MCM 8 x 500) |

DC link (for braking resistor)

| | |
|---------------|-----------|
| PE connection | M12 screw |
|---------------|-----------|

Max. motor cable length


| | |
|----------|-------------------|
| Shielded | 150 m (492.13 ft) |
|----------|-------------------|



Figure similar

Converter losses to EN 50598-2*

| | |
|--|----------|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | -34.60 % |

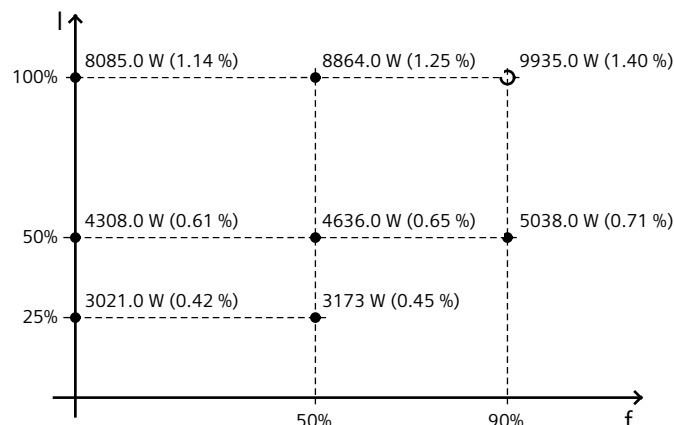

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Standards

| | |
|---------------------------|--|
| Compliance with standards | UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH |
|---------------------------|--|

| | |
|------------|---|
| CE marking | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |
|------------|---|

Operator panel: Intelligent Operator Panel (IOP-2)

Screen

| | |
|----------------|------------|
| Display design | LCD colors |
|----------------|------------|

| | |
|-------------------|-----------------|
| Screen resolution | 320 x 240 Pixel |
|-------------------|-----------------|

Ambient conditions

Ambient temperature during

| | |
|-----------|-----------------------------------|
| Operation | 0 ... 50 °C (32 ... 122 °F) |
| | 55 °C only with door mounting kit |

| | |
|---------|--------------------------------|
| Storage | -40 ... 70 °C (-40 ... 158 °F) |
|---------|--------------------------------|

| | |
|-----------|--------------------------------|
| Transport | -40 ... 70 °C (-40 ... 158 °F) |
|-----------|--------------------------------|

Mechanical data

| | |
|----------------------|-------------------|
| Degree of protection | IP55 / UL type 12 |
|----------------------|-------------------|

| | |
|------------|-------------------|
| Net weight | 0.13 kg (0.30 lb) |
|------------|-------------------|

| | |
|-------|-------------------|
| Width | 70.0 mm (2.76 in) |
|-------|-------------------|

| | |
|--------|---------------------|
| Height | 106.85 mm (4.21 in) |
|--------|---------------------|

| | |
|-------|--------------------|
| Depth | 19.65 mm (0.77 in) |
|-------|--------------------|

Relative humidity at 25°C during

| | |
|----------------|------|
| Max. operation | 95 % |
|----------------|------|

Approvals

| | |
|----------------------------|--------------------------|
| Certificate of suitability | CE, cULus, EAC, KCC, RCM |
|----------------------------|--------------------------|

I/O Extension Module

Technical specifications for the I/O Extension Modul are available via direct input (MLFB 6SL3255-0BE00-0AA0).