
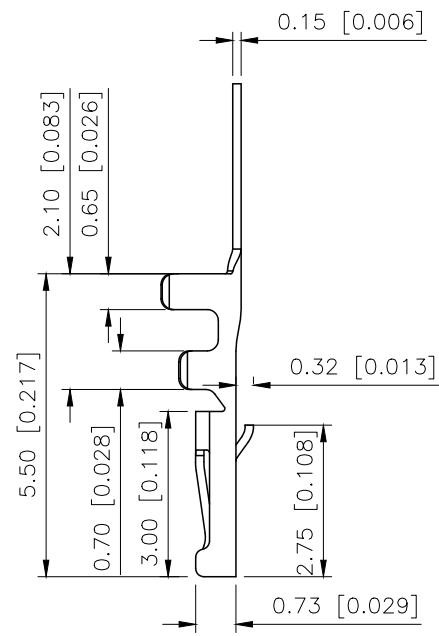


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树

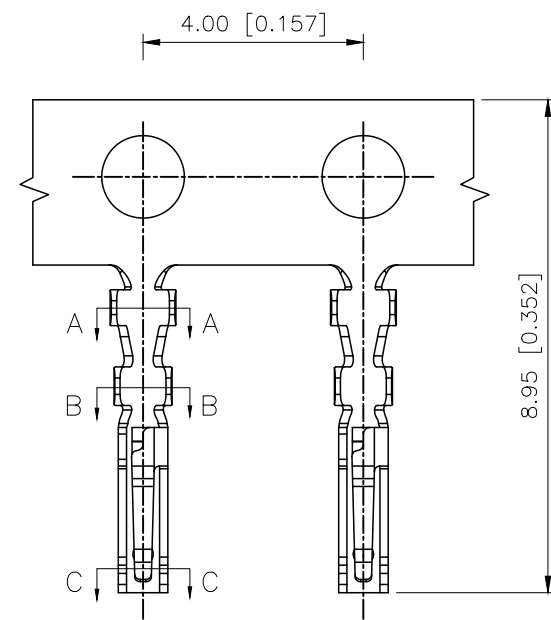





■SPECIFICATIONS

- Voltage rating:125V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:250V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥100MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤40mΩ

PART NO.:

X9827 T-P XX
① ② ③ ④

- ①Series No
- ②Category:T-Terminal
- ③Material:P-Phosphor bronze
- ④Plating style:V01-Gold Flash;V03-Gold 3u"
SN-Bright tin plating 70u"Min;
SN1-Bright tin plating 100u"Min



X9827T-PSN1	Phospho Bronze	AWG#28-32	0.90mm(Max)	Stamping Before Plating:30u" Ni;100u"Sn Min.	X9827H
X9827T-PV01				Stamping Before Plating:30u" Ni;Whole Gold:Gold Flash	
X9827T-PV03				Stamping Before Plating:30u" Ni;Whole Gold:3u" Min	
X9827T-PSN				Stamping Before Plating:30u" Ni;70u" Sn Min	
PART No	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.25mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X9827T-PV01
APPROVED		SIZE:	A4	DWG NO.:	