
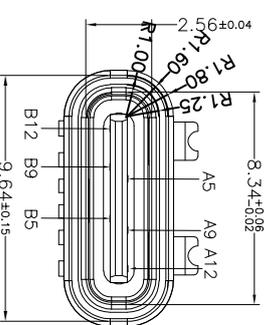
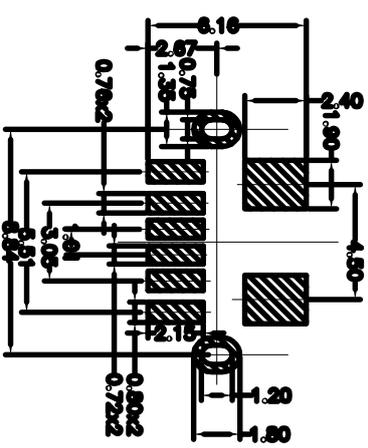
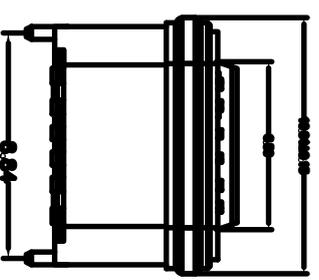
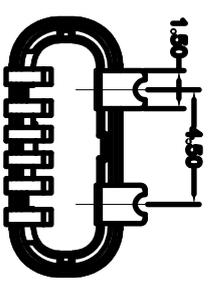
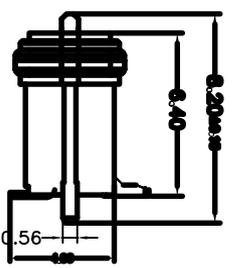
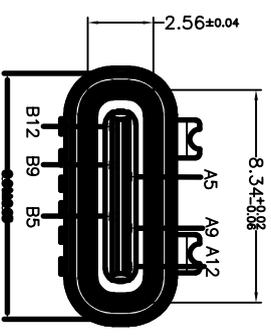
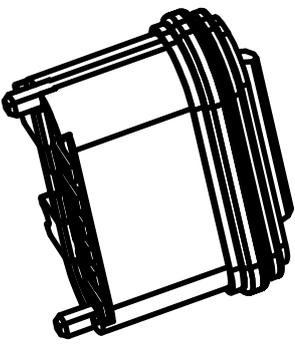


CUSTOMER

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

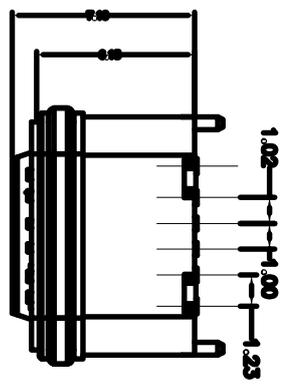

R角

- Note:
- Material:
 - Housing: PA9T
 - Contact: C5191, t=0.20mm
 - Shell: Kirsite
 - ELECTRICAL:
 - CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1.25A PARALLELED FOR A TOTAL OF 5A;
 - INITIAL CONTACT RESISTANCE: 40 MEGOHMS
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 5~20N
 - UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES)
 - FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES
 - OPERATING TEMPERATURE: -40°~80°.

TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TOLERANCE	NAME (INTENDED USE) CUSTOMER DRAWING		
X.X ±0.30 X.X' ±10°	PART NO. FY23-018TC64F64-01	TITLE: CF 6P防水立贴6.4锌合金	DRAWG NO. FY23-018TC61F64-02
.XX ±0.20 X.X' ± 8°	DESIGN: ZXM	SCALE 1:1	SHEET 1/2
.XXX ±0.10 .XX' ± 5°	APPD:	REV.	A
UNITS mm			
MATERILA ---			
FINISH ---			