




PennEngineering
Corporate Headquarters – Danboro, PA
 5190 Old Easton Rd.
 Danboro, PA 18916
Phone: 215-766-8853
Toll-Free Phone: 1-800-237-4736 (U.S. only)
Email: info@pemnet.com
Website: www.pemnet.com

Part # SMTSO-116-12ET, ReelFast® Surface Mount Nuts and Spacers/Standoffs -

Type SMTSO - Unified

Type SMTSO - ReelFast® surface mount nuts and standoffs are available threaded and unthreaded.

Packaged on 330 mm recyclable reels. Tape width is 24 mm. Supplied with polyimide patch for vacuum pick up. Reels conform to EIA-481.

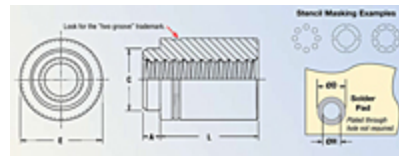

Specifications

Thru-Hole + .004-.003	.116 in
Thru-Hole Code	116
Length Code	12
L - Length ± .005	.375 in
Min. Sheet Thickness	.060 in
A Max.	.060 in
C Max.	.161 in
E ± .005	.219 in
øH - Hole Size in Sheet + .003 - .000	.166 in
øD - Min. Solder Pad	.244 in
Parts per Reel	300
Pitch	16 mm
For Use in Sheet Hardness¹	P.C. Board
Fastener Material	Carbon Steel



Standard Finish	Electro-Plated Tin, ASTM B545, Class A with Clear Preservative Coating, Annealed
CAD Supplier	PennEngineering® (PEM®)

¹ For use in P.C. Board