

RAYCHEM

TE Internal #: 1208484001 Black, 1.75:1, Single Wall Tubing, Shrinks To 2.54 mm [.1 in], Chlorinated Polyolefin, 4.75 mm [.187 in] Inner Diameter, Flame-Retardant, Spool

View on TE.com >



Heat Shrink Tubing > Single Wall NTFR: Heat Shrink Tubing, 1.75:1 Shrink Ratio



Primary Product Color: Black Wall Type: Single Wall Expanded Inside Diameter (Min): 4.75 mm [.187 in] Recovered Inside Diameter (Max): 2.54 mm [.1 in] Shrink Ratio: 1.75:1

All Single Wall NTFR: Heat Shrink Tubing, 1.75:1 Shrink Ratio (14)

Features

Product Type Features

Wall Type

Single Wall

Body Features

Material Systems Code	20
Fluid Type	Aviation Fuel, Brake Fluid, Chemicals /Solvents, De-Icing Fluid, Diesel Fuel, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	1.75:1
Primary Product Material	Chlorinated Polyolefin
Flexibility	Very Flexible
Dimensions	
Recovered Wall Thickness (Tolerance)	.51 mm[.02 in]
Recovered Wall Thickness (Nominal)	.83 mm[.033 in]
Expanded Inside Diameter (Min)	4.75 mm[.187 in]
Recovered Inside Diameter (Max)	2.54 mm[.1 in]
Tubing Size Range	2.54 – 4.75 mm[.1 – .187 in]
Usage Conditions	

Usage Conditions

C For support call+1 800 522 6752

NTFR-3/16-0-SP

Black, 1.75:1, Single Wall Tubing, Shrinks To 2.54 mm [.1 in], Chlorinated Polyolefin, 4.75 mm [.187 in] Inner Diameter, Flame-Retardant, Spool



Shrink Temperature (Min)	90 °C
Tubing Flammability Type	Flame-Retardant
Operating Temperature Range	-70 – 121 °C
Recovery Temperature	135 °C
Operation/Application	
Mechanical Resistance	Abrasion, Fluids, Mechanical Damage, Strain Relief
Product Availability	
Applicable Region	Worldwide
Packaging Features	
Packaging Method	Spool
Other	
Meets Low Outgassing Requirements	No
Product Source	US

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on


NTFR-3/16-0-SP

Black, 1.75:1, Single Wall Tubing, Shrinks To 2.54 mm [.1 in], Chlorinated Polyolefin, 4.75 mm [.187 in] Inner Diameter, Flame-Retardant, Spool



requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Customers Also Bought

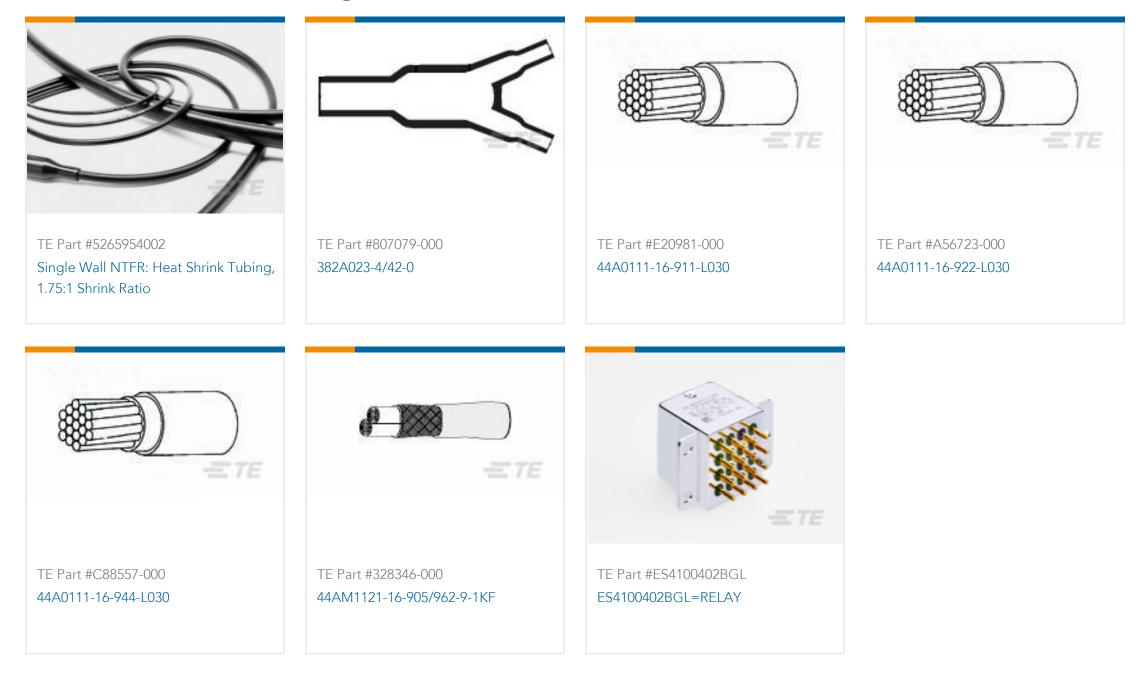

Documents

Product Drawings

NTFR-3/16-0-SP

English

Datasheets & Catalog Pages NTFR Pages from 9-1773447-9

English

1654025_Sec3_NTFR

English

raychem-tubing-product-selection-guide

English

Product Specifications Product Specification

English