

10

9

8

7

6

5



4

3

2


1

SECTION X-X





SECTION Z-Z

INSULATION BARREL



SECTION Y-Y

WIRE BARREL

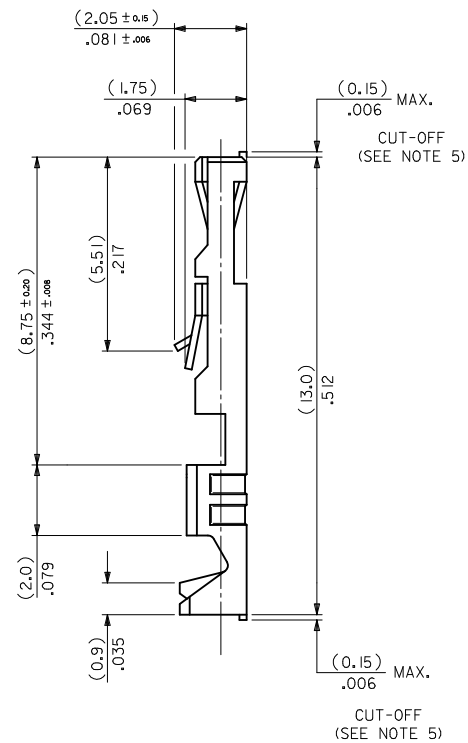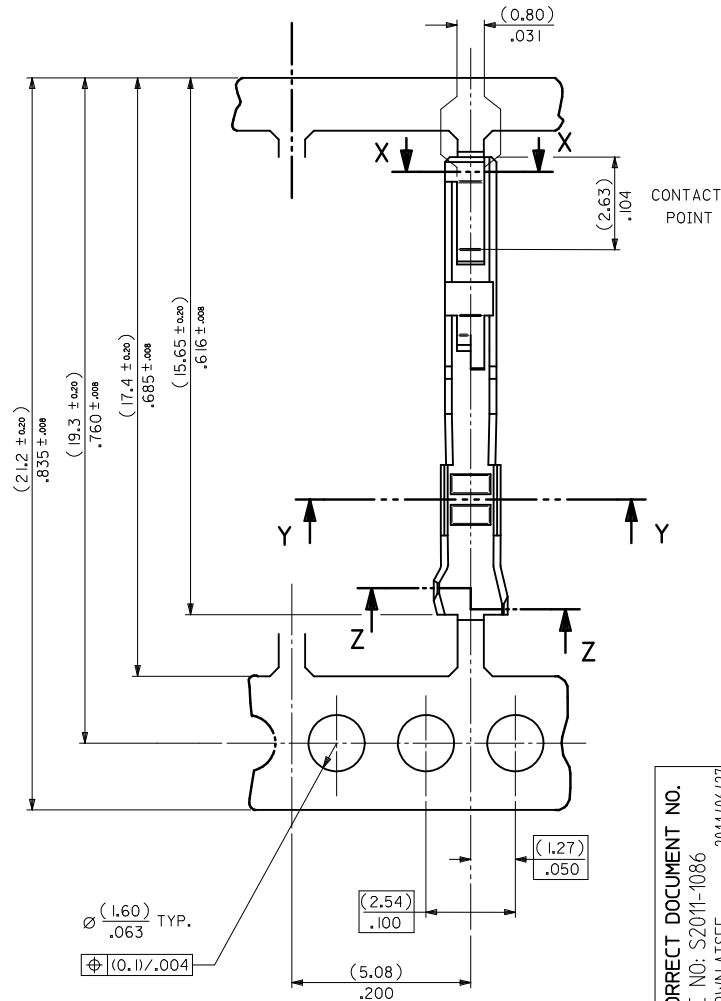

NOTES:

1. MATERIAL -
PHOSPHOR BRONZE CDA 521
THICKNESS: (0.200) / .008
TENSILE STRENGTH: 655-760 N/mm²
PLATING - SEE SHEET 2
2. FOR DIMENSIONS A, B, C, D, F & G
SEE SHEET 2
3. FOR WIRE SIZE & INSULATION DIA
SEE SHEET 2
4. THIS TERMINAL TO MATE WITH
(0.635) / .025 SQUARE PIN
5. MAX BURR AFTER CUT-OFF
(0.025) / .001

CORRECT DOCUMENT NO. EC NO: S2011-1086 DRWN:ATSEE 2011/06/27 CHKD:SKANG 2011/07/04 APPR:MLONG 2011/07/04	DESCRIPTION	QUALITY SYMBOLS F_A=0 F_G=0 F_P=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY NPC	DATE 1987/08/27	C-GRID III FEMALE CRIMP TERMINAL				
			4 PLACES	± ---	± ---	CHECKED BY D.MORIARTY	DATE 2005/08/26					
			3 PLACES	± ---	± .004	APPROVED BY MLONG			DATE 2011/07/04	molex	MOLEX INCORPORATED	
			2 PLACES	± 0.1	± .008							
			1 PLACE	± 0.2	± ---	MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE			SD-90119			1 OF 2
L1	REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

9

8

7

6

5

4

3

2

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[90119-0109 \(Cut Strip\)](#) [90119-0110 \(Cut Strip\)](#) [90119-0121 \(Mouser Reel\)](#) [90119-0109 \(Mouser Reel\)](#) [90119-0121 \(Cut Strip\)](#) [90119-0111 \(Mouser Reel\)](#) [90119-0110 \(Mouser Reel\)](#) [90119-0111 \(Cut Strip\)](#)