

VS-09-BU-DSUB-CD-G - D-SUB contact support



1688845

<https://www.phoenixcontact.com/us/products/1688845>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

D-SUB contact carrier, shell size 1, for nine signal contacts, type of contact socket, for crimp contacts, straight, fixing with M thread, for panel mounting frame VS-09-...



Commercial data

Item number	1688845
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AB19
Product key	ABNCAB
Catalog page	Page 212 (C-2-2013)
GTIN	4017918822972
Weight per piece (including packing)	11.4 g
Weight per piece (excluding packing)	11.4 g
Customs tariff number	85366990
Country of origin	DE

VS-09-BU-DSUB-CD-G - D-SUB contact support



1688845

<https://www.phoenixcontact.com/us/products/1688845>

Technical data

Product properties

Product type	Female insert
Type	D-SUB
Number of positions	9
Connection profile	D-SUB
Number of slots	1
Type	Socket
Shielded	yes

Insulation characteristics

Overvoltage category	III
Degree of pollution	2

Electrical properties


Rated voltage in acc. with IEC 61076-2-101	400 V
Rated voltage (III/3)	125 V
Rated current	5 A (at 20 °C)
Test voltage	1200 V
Transmission medium	Copper

Connection data

Connection technology

Connection method	Crimp connection
-------------------	------------------

Dimensions

Dimensional drawing	
Width	17.9 mm
Height	12.93 mm
Length	31.19 mm

Material specifications

Flammability rating according to UL 94	V0
Housing material	Metal
Housing surface material	metal-plated
Contact surface material	Gold
Contact carrier material	Glass-fiber reinforced thermoplastics, UL 94 V0

1688845

<https://www.phoenixcontact.com/us/products/1688845>

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
Insertion force per signal contact	≤ 3.40 N

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-55 °C ... 130 °C

Mounting

Mounting type	Screw mounting
---------------	----------------


VS-09-BU-DSUB-CD-G - D-SUB contact support

1688845

<https://www.phoenixcontact.com/us/products/1688845>



Drawings

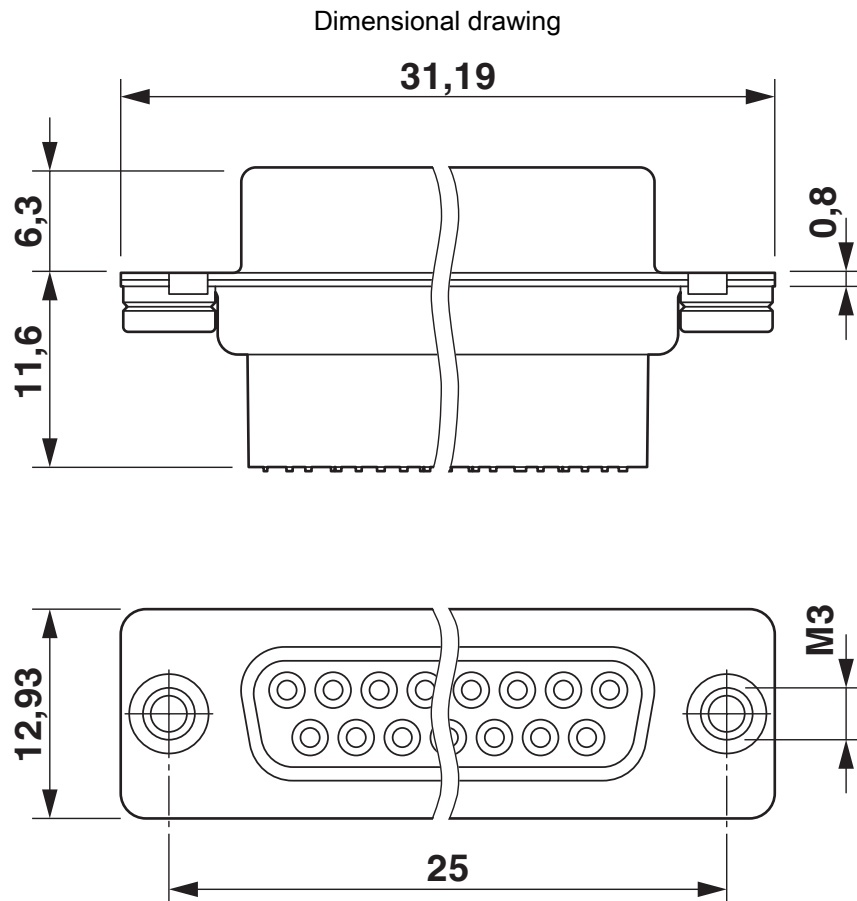

D-SUB contact carrier


VS-09-BU-DSUB-CD-G - D-SUB contact support

1688845

<https://www.phoenixcontact.com/us/products/1688845>



Schematic diagram

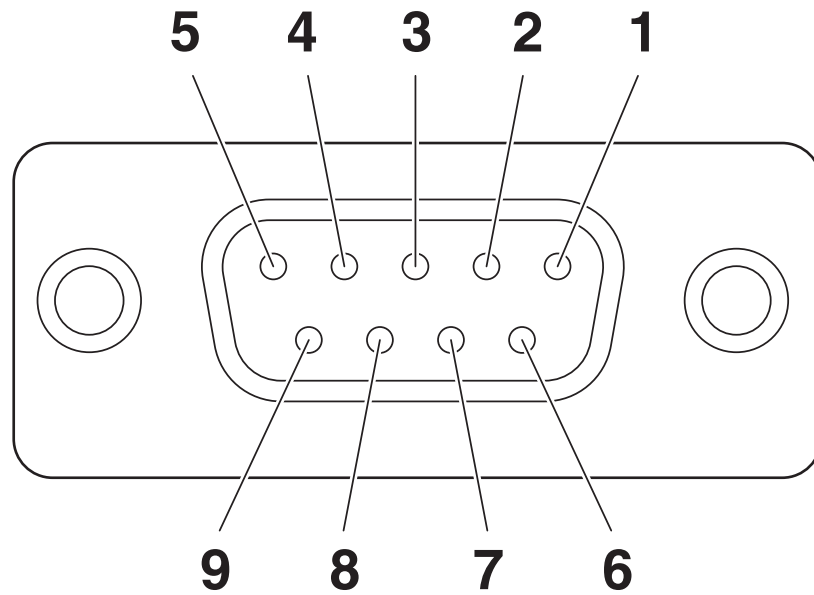

VS-09-BU-DSUB-CD-G - D-SUB contact support



1688845

<https://www.phoenixcontact.com/us/products/1688845>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1688845>



UL Recognized

Approval ID: FILE E 118976

1688845

<https://www.phoenixcontact.com/us/products/1688845>

Classifications

ECLASS

ECLASS-11.0	27440302
ECLASS-13.0	27440302
ECLASS-12.0	27440302

ETIM

ETIM 9.0	EC001132
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(a), 6(a)-I

China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f4b36fc9-0270-4ca1-b728-6ba1d1aca751

VS-09-BU-DSUB-CD-G - D-SUB contact support



1688845

<https://www.phoenixcontact.com/us/products/1688845>

Accessories

CUC-DSC-J1BAU-S/DSC24 - D-SUB crimp contact

1418788

<https://www.phoenixcontact.com/us/products/1418788>



D-SUB crimp contact, connection method: Crimp connection, connection cross section: AWG 24- 20

CUC-DSC-J1BAU-S/DSC28 - D-SUB crimp contact

1418787

<https://www.phoenixcontact.com/us/products/1418787>



D-SUB crimp contact, connection method: Crimp connection, connection cross section: AWG 28- 24

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com