



Note for plug:

Material:
 Housing-Polycarbonate, clear.
 Terminal-0.36[.014] thick phosphor bronze.
 Thick gold in localized gold plate.
 Area, Gold flash over the remainder.
 Over 2.54mm[.000100] thick nickel underplate

Order code: AT-C-26-4/4/X-XX

Order color:
 B: Black
 W: White
 S: Silver

Length Code	Retracted Length(L1)	Retracted Length(L2)
5	0.98~1.18FT	5.0~5.75FT
7	1.44~1.64FT	7.0~8.05FT
10	1.91~2.23FT	10.0~11.5FT
12	2.46~2.78FT	12.0~13.8FT
14	2.63~2.95FT	14.0~16.1FT
25	6.07~6.39FT	25.0~28.75FT

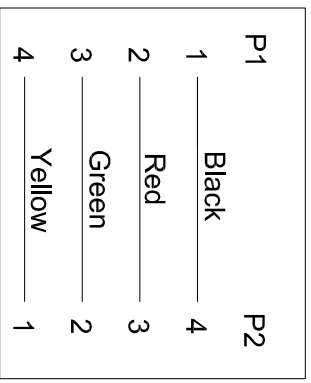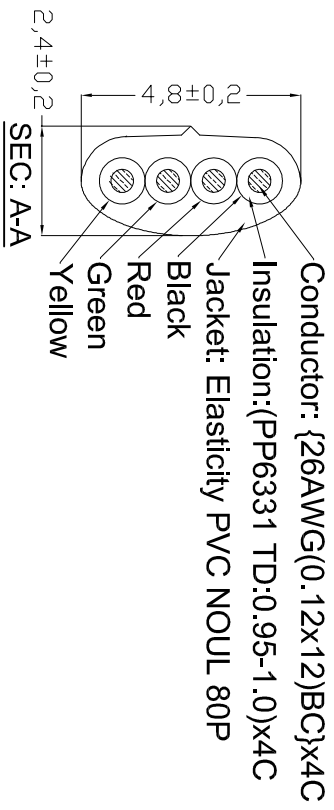

Conductor: {26AWG(0.12x12)BC}x4C
 Insulation:(PP6331 TD:0.95-1.0)x4C
 Jacket: Elasticity PVC NOUL 80P

ROHS compliant
 Unit: mm

Scale	Free			Date	Name
TOLERANCE				Drawn	Amy
.X	±0.50			Approved	Amy
.XX	±0.20				
DIM	TOL				
Angle	±2°				

Customer-No.		Drawing-No.	
ASSMANN WSW-No.		AT-C-26-4/4/X-XX	
ASS 8160 CA		rev00	



1	2	3	4	5	6	7
H	G	F	E	D	C	B