


- D-Sub / Centronics
- Multiflex - DIN 41651
- Modular
- USB IEEE 1394
- Switches
- Powerinlets Poweroutlets
- DIN 41612 DIN 41617 Hard Metric
- MiniDIN
- Pin header Female header Sockets / Jumper
- Terminal Blocks
- Memory Card connectors
- FFC / FPC
- Micro - Miniature

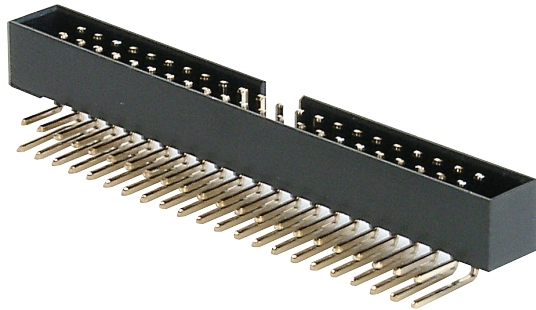

**Isolierkörpermaterial**  
PA6T, UL94V-0

**Kontaktmaterial**  
Messing

**Kontaktoberfläche**  
Ni, Au

**Kontaktwiderstand**  
20mΩ max

**Isolationswiderstand**  
1000MΩ min

**Strombelastbarkeit**  
1.5A

**Betriebstemperatur**  
-40°C - +105°C

**Betriebsspannung**  
125V AC

**Prüfspannung**  
1000V AC

**Verpackung**  
Blisterverpackung

**Insulator material**  
PA6T, UL94V-0

**Contact material**  
Brass

**Plating**  
Ni, Au

**Contact resistance**  
20mΩ max

**Insulation resistance**  
1000MΩ min

**Current rating**  
1.5A



**Operating temperature**  
-40°C to +105°C

**Operating voltage**  
125V AC

**Test voltage**  
1000V AC

**Packing**  
Tray packing

Dimensions		
No. of contacts	A	B
10	17.00	8.00
14	21.00	12.00
16	23.00	14.00
20	27.00	18.00
26	33.00	24.00
34	41.00	32.00
40	47.00	38.00
44	51.00	42.00
50	57.00	48.00

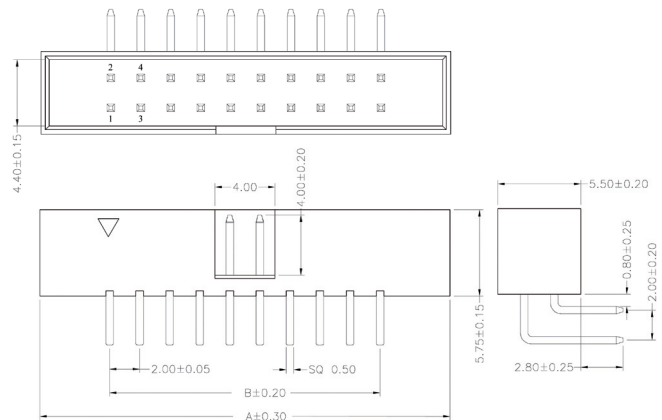

Bestellcode / Ordercode

Polzahl

No. of contacts

10 / 14 / 16 / 20 / 26 /  
34 / 40 / 44 / 50

10 / 14 / 16 / 20 / 26 /  
34 / 40 / 44 / 50

2 - Gold flash

2 - Gold flash

**AWHW2 xx A - 0 2 0 2**

Bitte „x“ durch die geeignete Option ersetzen  
Please replace „x“ with appropriate option