
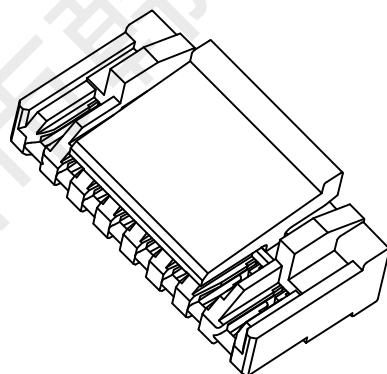
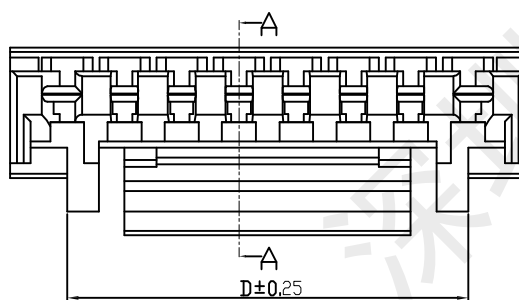
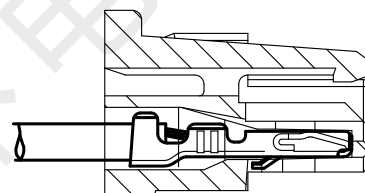


SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: PA66, UL94V-0

孔位 Poles	尺寸 (mm)			
	A	B	C	D
2Y	1.25	2.00	3.75	——
3Y	2.50	3.20	5.00	——
4Y	3.75	4.00	6.25	——
5Y	5.00	4.00	7.50	——
6Y	6.25	6.25	8.75	——
7Y	7.50	6.25	10.00	——
8Y	8.75	6.25	11.25	8.75
9Y	10.00	6.25	12.50	9.75
10Y	11.25	8.20	13.75	11.00
11Y	12.50	8.20	15.00	11.00
12Y	13.75	8.20	16.25	11.00
13Y	15.00	8.20	17.50	11.00
14Y	16.25	8.20	18.75	11.00
15Y	17.50	8.20	20.00	11.00

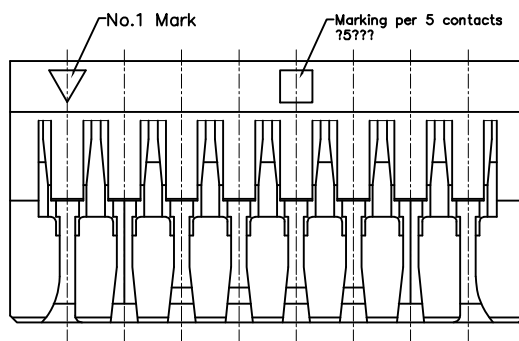

GENERAL TOLERANCE		制图	黄彬		料号	HX GH1.25-5Y		版本	A
X.±0.25	X.*±2'	DRAWING	张伟		PART NO.	压线端子胶壳		页次	1/1
.X±0.20	.X'±1'	审核	罗小春		TITLE			SHEET	
.XX±0.15	.XX'±0.5'	核准	MM		CUTM. NO.				
.XXX±0.10	.XXX'±0.5'	APPRONAL	比例	1:1	深圳市韩下电子有限公司				
		单位	SCALE						