

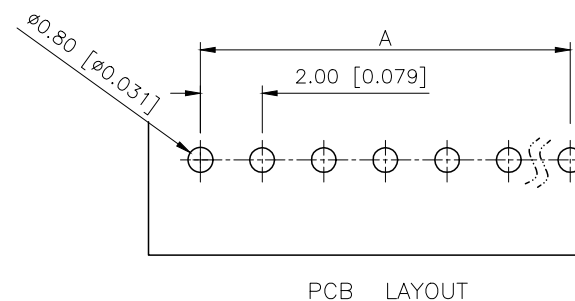

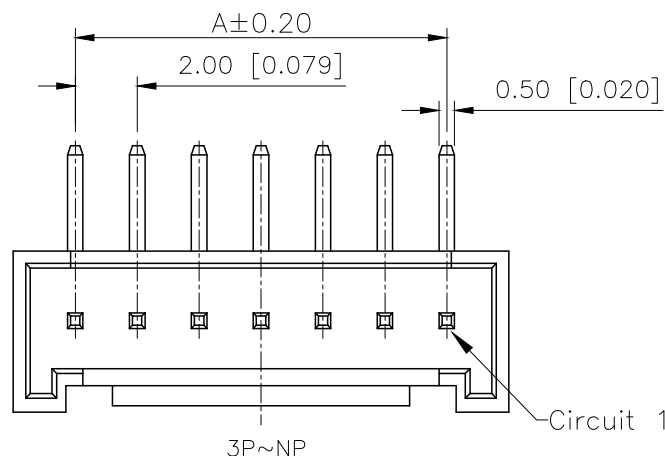



	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面新增2PIN有无定位槽说明, 尺寸修正, 升级整理图面	2024.9.26	阿树

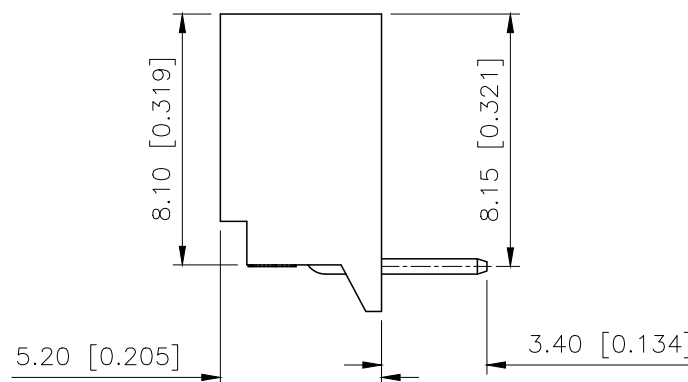

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:2A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ
- Material:
- Rubber core: PA66 UL94V-0
- Contact PIN: Brass

Poles	DIM.A	DIM.B
2P	2.0	6.0
3P	4.0	8.0
4P	6.0	10.0
5P	8.0	12.0
6P	10.0	14.0
7P	12.0	16.0
8P	14.0	18.0
9P	16.0	20.0
10P	18.0	22.0
11P	20.0	24.0
12P	22.0	26.0
13P	24.0	28.0
14P	26.0	30.0
15P	28.0	32.0
16P	30.0	34.0

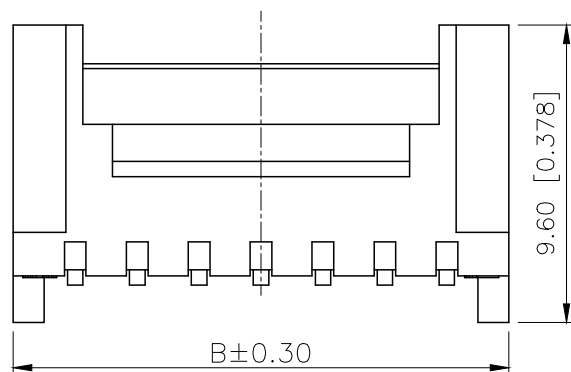

PART NO.:

X2011	W	R-XX	A-NO	SN
①	②	③	④	⑤
			⑥	⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Row No.Pin No:XX-02~16Pin
⑤Plug the Pin&Special N0:
A-With Located Block
⑥Material:PA66 UL94V-2
⑦Planting: SN-Bright tin plating

X2011WR-XXA-N0SN	PA66 UL 94V-0	Brass	Tin-plated	2011H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Housing

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED	TOLERAUCES

XKIB 星城 Connection

DESIGN	阿树	VIEW: 
CHECKED		UNIT: mm/in
APPROVED		SIZE: A4

MODEL TYPE:	2.00mm Crimp Style Connector
PART NO.:	X2011WR-XXA-NOSN
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1