
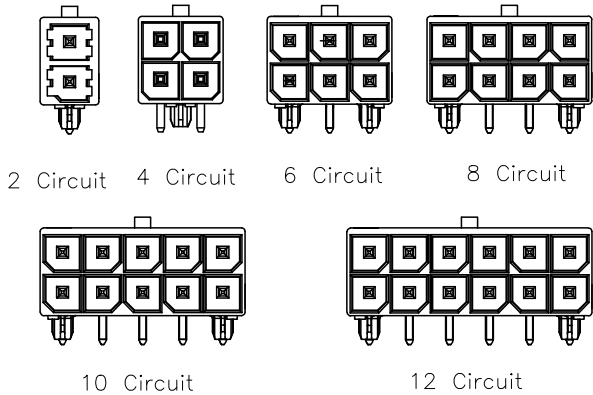
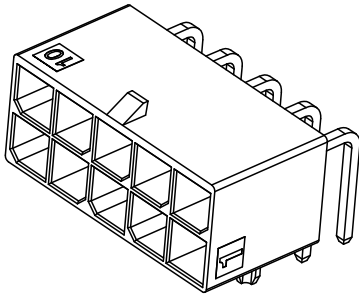


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.30	阿树



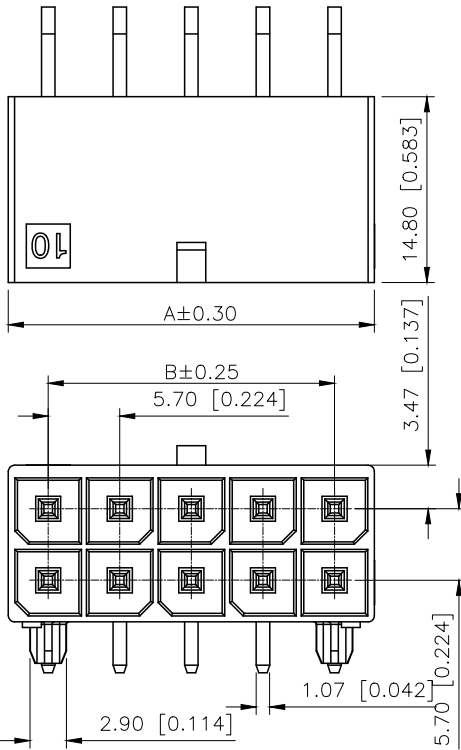


Specifications:
Voltage rating:600V AC/DC
Current rating:16A AC/DC
Withstanding voltage:2200V AC/minute
Temperature range:-40℃-+125℃
Insulation resistance:≥1000MΩ
Contact resistance:≤2mΩ
After environmental testing:≤10mΩ
Special No.:
H-High conductive Brass

PART NO.:

X5700 W R-2xXX-LP SW
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Row No.Pin No:2xXX-2x02~2x06Pin
⑤Material:LP-LCP UL94V-0
⑥Planting: SW-Matte tin plating

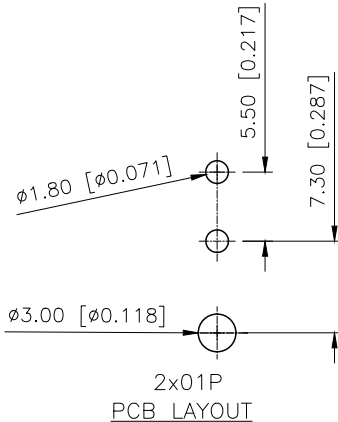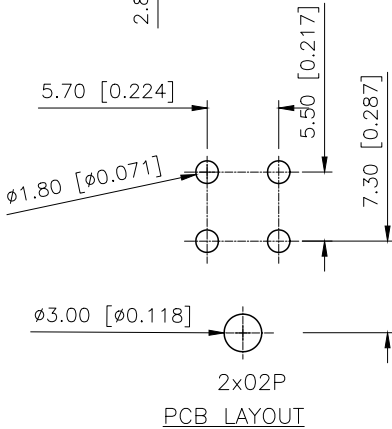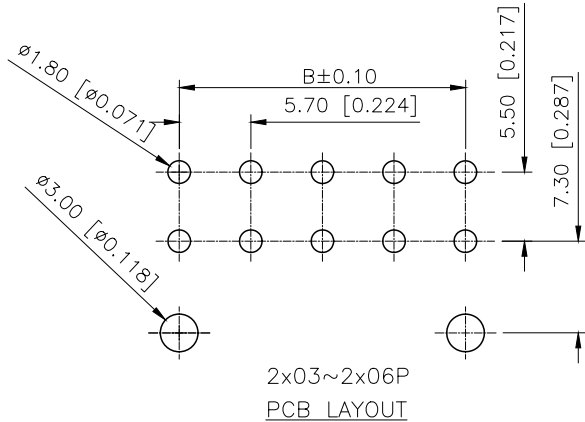

X5700WR-2xXX-LPSW	High conductive Brass	X5700H	X5700T
PART NO	Material	Suitable XKB Housing	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE: Wire to board connector
PART NO.: X5700WR-2xXX-LPSW
DWG NO.: