
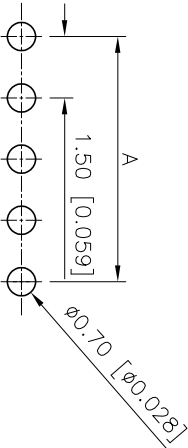
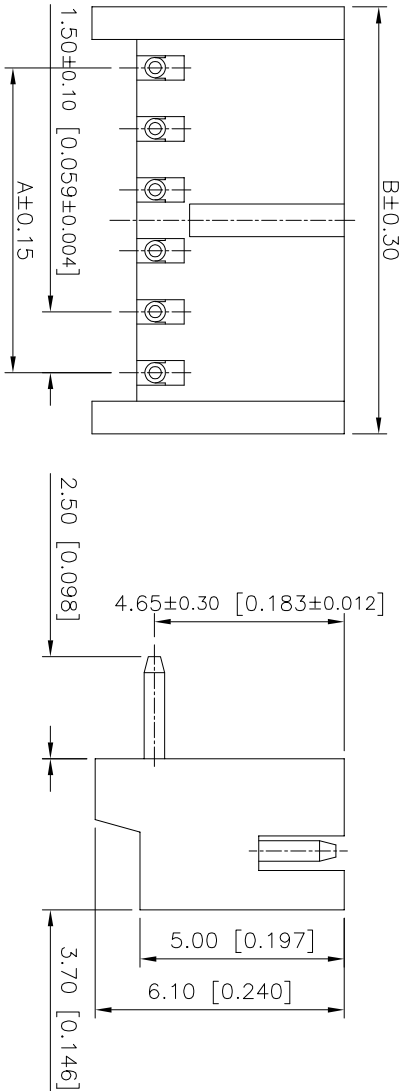


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	2024.02.29

Specifications (规格):

- Voltage rating (额定电压): 50V AC DC
- Current rating (额定电流): 2.4A AC/DC
- Withstanding voltage (耐压值): $\geq 500V$ AC/minute
- Insulation resistance (绝缘电阻): $500M\Omega$ Min
- Contact resistance (绝缘电阻): $20m\Omega$ Max
- Temperature range (使用温度): $-25^{\circ}C \sim +85^{\circ}C$

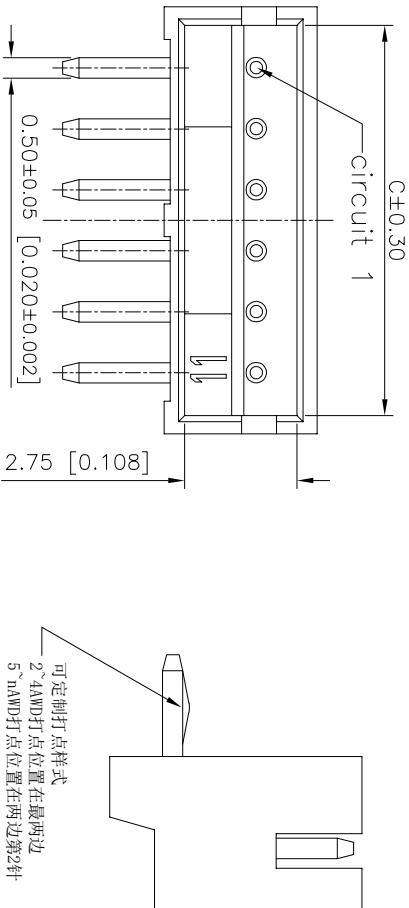

PCB LAYOUT

PART NO.:

X1502 W R-XX K-NO SN

- Series No
- Category: W-Wafer
- Welding Board Angle: R-Straight 90°
- Row No-Pin: XX-02P~15P
- Plug The Pin&Special NO.: K-Kink
- Material: NO-PA66 UL94V-0
- Plating: SN-Bright Tin Plated

NUMBER OF POSITIONS	DIM.A	DIM.B	DIM.C	NUMBER OF POSITIONS	DIM.A	DIM.B	DIM.C
02	1.50	4.50	3.70	09	12.00	15.00	14.20
03	3.00	6.00	5.20	10	13.50	16.50	15.70
04	4.50	7.50	6.70	11	15.00	18.00	17.20
05	6.00	9.00	8.20	12	16.50	19.50	18.70
06	7.50	10.50	9.70	13	18.00	21.00	20.20
07	9.00	12.00	11.20	14	19.50	22.50	21.70
08	10.50	13.50	12.70	15	21.00	24.00	23.20

ANGULAR	±5°
X.	±0.40
X.X	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

X1502WR-XXK-NOSN		PA66 UL 94V-0	BRASS	TIN-PLATED	X1502H
PART NO.		MATERIAL	MATERIAL(PIN)	FINISH(PIN)	Suitable XKB Terminal
DESIGN		桑 葚	VIEW:		MODEL TYPE:
CHECKED			UNIT: mm/in		PART NO.:
APPROVED			SIZE: A4		DWG NO.:
XKB INDUSTRIAL PRECISION CO.,LIMITED		SCALE		PAGE	REVISION
		N/A		1/1	A0