
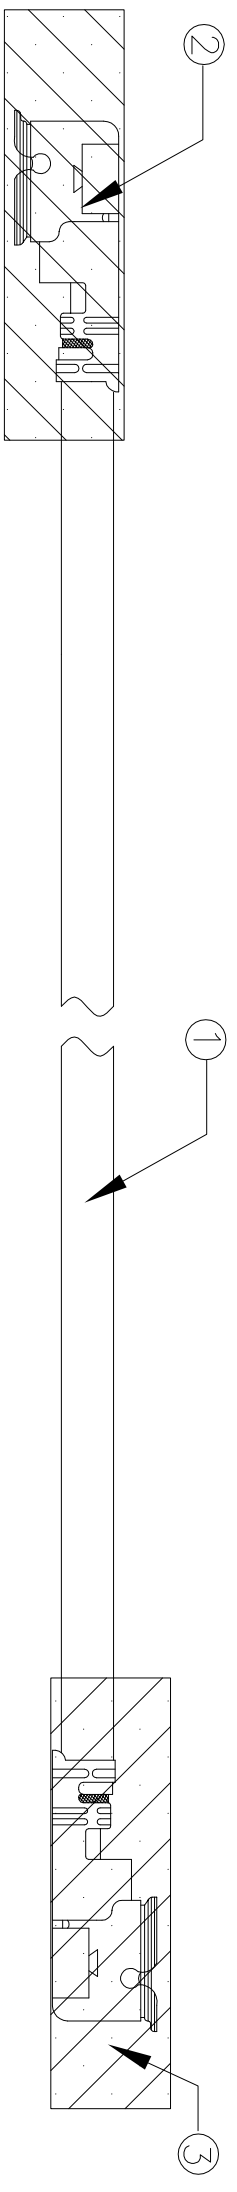


Loc	GP	DIST	00	P	LTR	A	NEW RELEASE	REVISIONS	DESCRIPTION	DATE	DWN	APVD
										12FEB09	CP	LZ

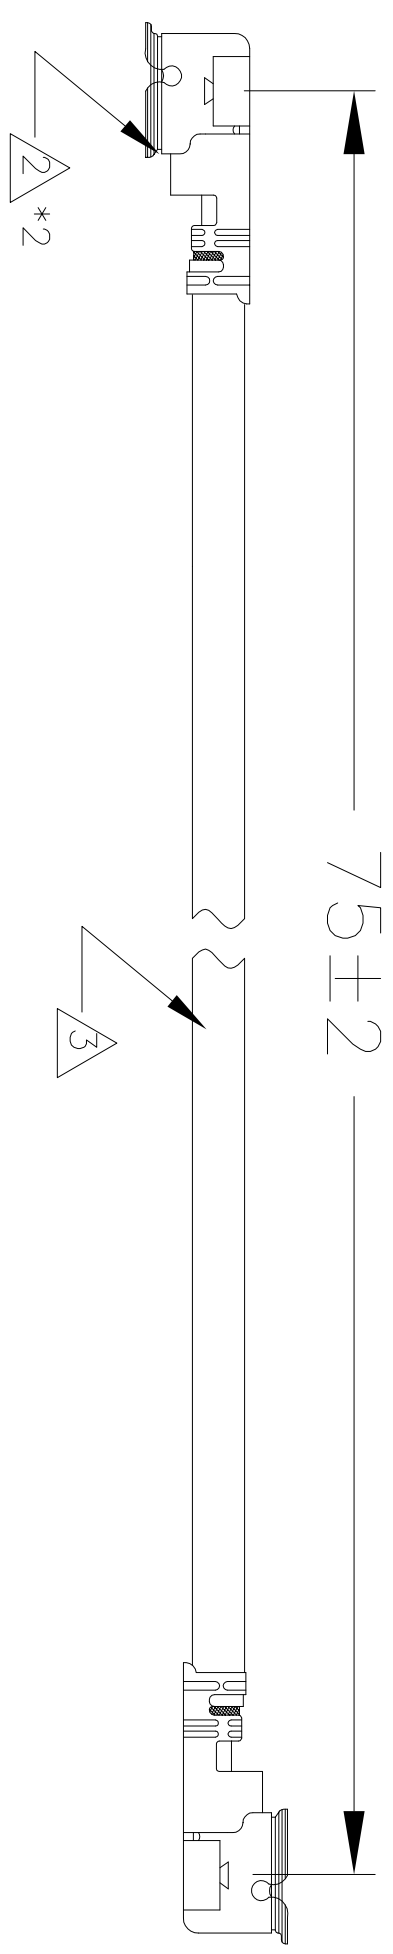

- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY

- HI-POT: 200 VDC FOR 100MS
- INSULATION RESISTANCE: 50M OHMS MIN
- CONTINUITY RESISTANCE: 2 OHMS MAX
- FREQUENCY RANGE: DC TO 6 GHZ
- VSWR: 1.5:1 MAX
- CONNECTOR: TYPE III U.FL
- SUPPLIER: I-PEX 20278-112R-13
- CABLE: 1.13MM OD, JACKET WHITE, 50 OHMS FEP INSULATED
- SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
- TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	Chen Ping	12FEB09	APVD	Lucky Zhang	12FEB09	NAME	FWT3 Ericsson UMTS/Aux cable assembly					
CHK	Andrew Dong	12FEB09	Product spec				White, 75mm, 180degree					

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm [INCHES]	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	± -

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
75	MM	COAXIAL CABLE, WHITE, OD 1.13MM	1
-1	U/M	DESCRIPTION	ITEM

MATERIAL		CUSTOMER DRAWING	SCALE	N.T.S.	SHEET	1	OF	1	REV	A