


Wire Wound Type Common Mode Filter




- 1.High common mode impedance at high frequency cause excellent noise suppression performance.
- 2.WBA3416L series realizes small size and low profile. 3.4x1.6x2.0 mm.
- 3.100% Lead(Pb) & Halogen-Free and RoHS compliant.

Part Number	L (uH)Min	Freq (KHz)	Rdc (Ω) max.	Irms (mA)max.	Rated Volt. (Vdc)max.	IR (MΩ) min.
WBA3416L600T-D M	60	100/0.1V	1.7	200	50	10

MECHANICAL

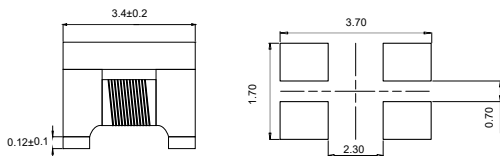


SUGGEST LAYOUT


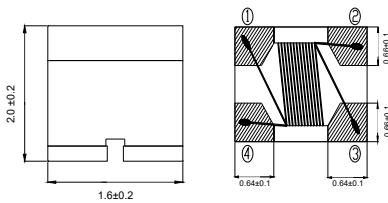


Dimension : mm


SCHEMATICS

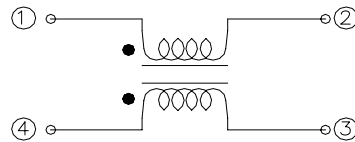

SOLDERING CONDITIONS




Reel

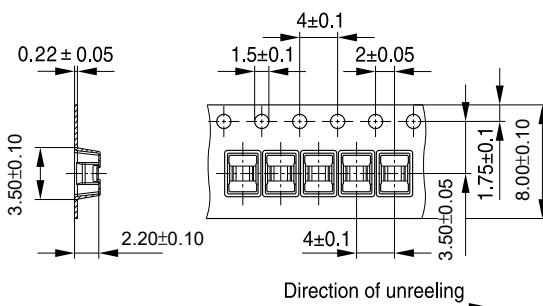

Direction of unreeling

IND1752-J-E

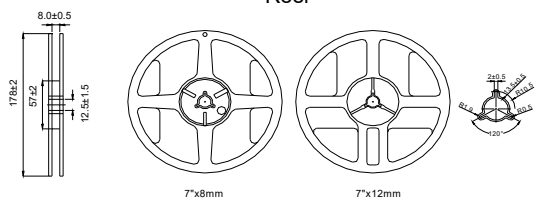

Dimensions in mm

Quantity (pcs):
2000 PCS PER REEL
5 REELS PER CARTON
10000PCS PER CARTON