


**NOTES:**

- ① MAT'L: COPPER (STOCK TKN.  $\frac{.040}{1.02}$ )
  - ② PLATING: ELECTRO TIN (.0003 MIN)
  - ③ TIN-PLATED BRASS FUNNEL FERRULE
  - ④ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: ( $\pm .005$ )
- 02 = .094  
 04 = .119  
 06 = .146  
 08 = .173  
 10 = .198  
 14 = .265  
 56 = .328  
 38 = .390
- "UL" LISTING #E32244  
 "CSA" LISTING #18689
- WIRE SIZE: 12 - 10 AWG  
 4.0 - 6.0 MM<sup>2</sup>

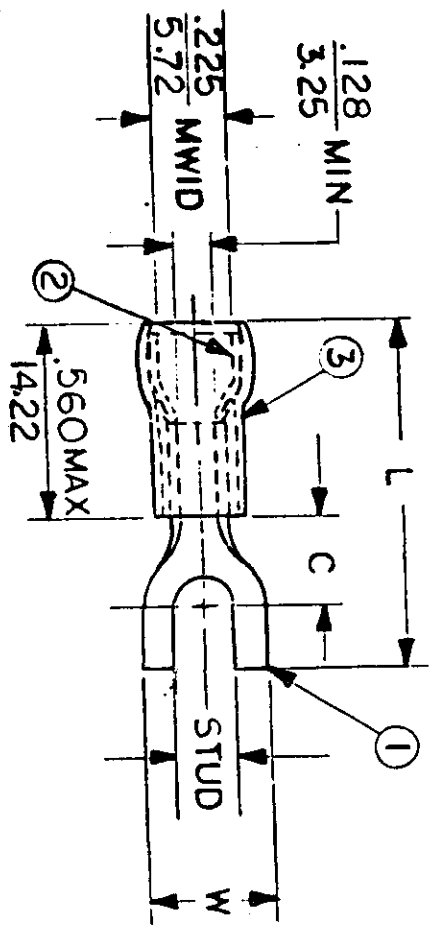

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	REFERENCE		DATE	TITLE:	DWG. NO.
				SCALE:	NTS			
C-841-	$\frac{.375}{9.53}$	$\frac{.301}{7.65}$	$\frac{1.118}{28.40}$	DRWN. BY: JJ	11.12.84	SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES	A	CUSTOMER DWG
C-868-	$\frac{.533}{13.54}$	$\frac{.393}{9.98}$	$\frac{1.271}{32.28}$	CHKD. BY: GZ	11.26.84			
				APPRD. BY:				
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED				SCALE: NTS		EIC molex INCORPORATED		
FRAC.	DEC.	ANG.						