

You are here: Products » Heatsinks f.cool » Profile heatsinks and fluid coolers » Retaining springs for transistors » THFMG 1...10 » THFMG

- ▼ Heatsinks f.cool
 - ▼ Profile heatsinks and fluid coolers
 - Standard extruded heatsinks
 - Extruded heatsinks for lock-in retaining spring
 - Extruded heatsinks for PCB mounting
 - Extruded heatsinks for DC/DC converter
 - Retaining springs for transistors
 - U-Extruded heatsinks
 - Die-cast heatsinks
 - Fin coolers
 - Fluid coolers
 - Aluminium flat-, quadrangular-, angled-, U- and T-profiles
 - ▶ Heatsinks and active heatsinks for processors
 - ▶ Board Level heatsinks
 - ▶ Cooling aggregates
 - ▶ Accessories for electronic components
 - ▶ Cases f.case
 - ▶ Connectors f.con

Retaining springs for transistors


THFMG 1...10

THFMG 2

for transistor-design TO 218, TO 220, TO 247, TO 264, SOT 32, SIP multiwatt

Data sheet

add to request

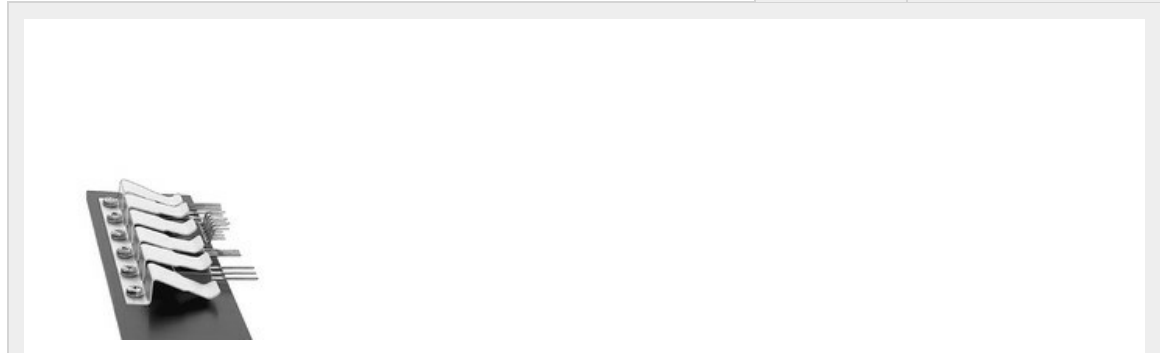

Features Technical Drawing Service

type of mounting for transistor-housing	screw mounting TO 218 TO 220 TO 247 TO 264 SOT 32 SIP Multiwatt
spring force	60 N
material	stainless steel
number of retaining-spring elements	2