

PRODUCT NO. DSWB10LHGETB		RoHS compliant			REV.	ECN NO.	DR	DATE
-----------------------------	--	----------------	--	--	------	---------	----	------

Note:

- All dimensions are in millimeters.
- General tolerance: $\pm 0.2\text{mm}$.
- Material:

Base:UL94V-0 PBT Thermoplastic(Black).
 Cover:UL94V-0 PBT Thermoplastic(Black/Red/Blue).
 Actuators:UL94V-0 PBT Thermoplastic(White).
 Contact plating:Gold plating over nickel.
 Pitting material:Epoxy.








4. Electrical

Electrical:2000 Operations per switch 24/VDC, 25mA.
 Non-Switching Rating:100mA, 50/VDC.
 Switching Rating:25mA, 24/VDC
 Contact Resistance:100 m Ω Max.at initial.

5. Mechanical

Mechanical life:2000 Operations per switch.
 Stroke:2.0mm.
 Operation Temp:-20 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$.
 Storage Temp:-40 $^{\circ}\text{C}$ to 85 $^{\circ}\text{C}$.

6. PART NUMBER DESCRIPTION:

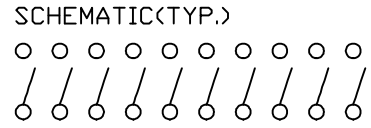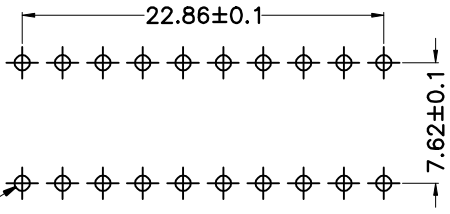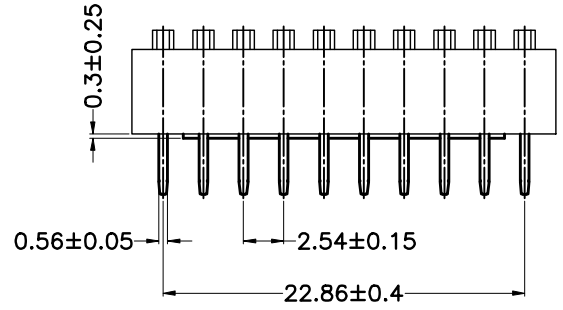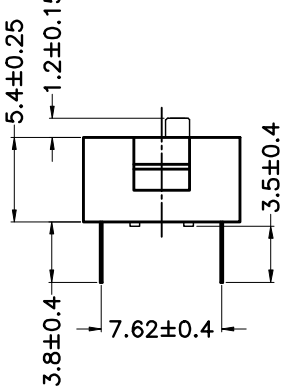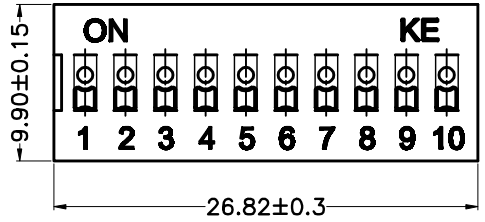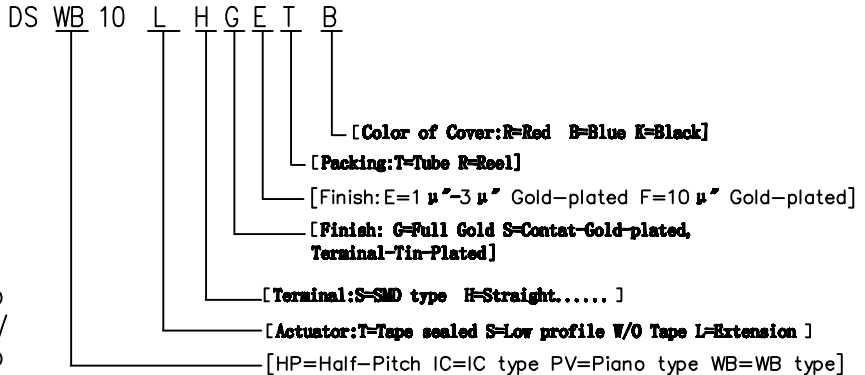

PCB Layout

注意:

- 波峰焊: 推荐焊锡温度在270 $^{\circ}\text{C}$ \pm 5 $^{\circ}\text{C}$, 浸锡时间为5~6秒钟。
- 手工焊: 使用30瓦烙铁控制温度在320 $^{\circ}\text{C}$, 焊接时间大约2~3秒钟。
- 拨柄位置: 产品焊接时, 请将产品的拨柄置于OFF端, 能给予产品更好的接触性能。
- 清洗过程: 清洗使用超声波方式, 能给予更好的效果。

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		东莞市广誉实业有限公司 DongGuan Kingtek Industrial Co., Ltd.				
LINER	ANGLES	PROJECTION		TITLE				
.0 \pm 0.30	0. \pm 1'	[Symbol]		BY DSWB SERIES PITCH 2.54mm				
.00 \pm 0.20	.0 \pm 0.5'			PRODUCT FAMILY DSWB SERIES				
.000 \pm 0.10	.00 \pm			PRAT NO. DSWB10LHGETB				
DESIGN	LU ER XIN	2013/07/02		FILE NO. DSWB10LHGETB-A				
DRAWING				SIZE	UNIT	SCALE	SHEET	REV.
CHECK				A4	mm	FIT	1 OF 1	A
APPRO.								