



ULTRAVOLT® V SERIES
VERTICAL, MICRO-SIZED
HIGH VOLTAGE BIASING SUPPLIES





Single-output micro-sized HV modules

The vertical, micro-sized V series is the ideal solution for applications that require a bias voltage ranging from 0 to 3000 V and very small current, at only 13.8 cc (0.84 in³). With a footprint under 2.54 cm² (1 in²), these modules are perfect for applications with limited board space.

Functions


- › 7 models from 0 to 600, 1000, 1250, 1500, 2000, 2500, or 3000 V
- › 0.5, 0.8, or 1 W of output power
- › Tight line/load regulation
- › Arc and continuous short circuit protection
- › Self-restoring output voltage
- › Low cost
- › Miniature and lightweight
- › Voltage monitoring
- › Low ripple (0.01% peak to peak)
- › Optional flying lead for high voltage output

Typical Applications

- › Bias supplies
- › Electrostatic chucks
- › Hand held X-Ray Florescence (XRF)
- › Avalanche photo diodes (APD)
- › Photomultiplier Tubes (PMT)
- › Silicon Detector (SiD)
- › X-Ray Flat Panel detector (FPD)
- › Ionization Chamber detector



PARAMETER	SPECIFICATIONS												UNITS
Input Voltage Vin (Pins 1 and 2)	5 ±0.5 (2 to 3 kV ONLY) 12 ±1, 15 ±1 (600 V to 1.5 kV ONLY), or 24 ±2												VDC
Input Voltage	5 (2 to 3 kV ONLY)			12			15 (600 V to 1.5 kV ONLY)			24			V
Input Current	No load: 55, full load: 450			No load: 45, full load: 200			No load: 40, full load: 190			No load: 35, full load: 160			mA
Polarity	Fixed positive and fixed negative												-
Output Voltage	0 to 600			0 to 1000			0 to 1250			0 to 1500			VDC
Input Voltage	12	15	24	12	15	24	12	15	24	12	15	24	VDC
Output Power	0.5	0.8	1	0.5	0.8	1	0.5	0.8	1	0.5	0.8	1	W
Output Current	0.83	1.33	1.67	0.5	0.8	1	0.4	0.64	0.8	0.33	0.53	0.67	mA
Output Voltage	0 to 2000			0 to 2500			0 to 3000						VDC
Input Voltage	5	12	24	5	12	24	5	12	24				VDC
Output Power	0.5	0.8	1	0.5	0.8	1	0.5	0.8	1				W
Output Current	0.25	0.40	0.50	0.20	0.32	0.40	0.167	0.267	0.333				mA
HV Setting	10 to 100K (potentiometer across Vref. and signal ground, wiper to adjust)												-
Load Voltage Regulation	< 0.01% of full output voltage for no load to full load												VDC
Line Voltage Regulation	< 0.01% of full output voltage over specified input voltage range												VDC
Residual Ripple	< 0.01% at full load												V pk to pk
Temperature Coefficient	100 ppm/°C for the max output voltage after starting and over temperature range 0 to 50°C												-
Output Voltage Monitor (600 to 1500 V)	+1 V/1 kV max or -1 V/-1 kV max according to model polarity output impedance = 200 kΩ ±1%												-
Output Voltage Monitor (2 to 3 kV)	12 to 24 V input only: 0 to +5 V ±2% 5 V inputs: 0 to +2.5 V ±2%												VDC
Reference Voltage	12 to 24 V input only: 5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA 5 V inputs: 2.5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA												-
Operating Temperature	-10 to +65, full load, max Eout, case temp.												°C
Storage Temperature	-20 to +70												°C
Safeguards	Arc and short circuit protection												-
Options	Flying lead for HV output												
Enhanced Interface (-EI) Option (2 to 3 kV Only)	Enable/disable (ON/OFF): 0 V to +0.5 V enable, +2.4 V to V_input disable (default = disable)												-
	Output current monitor (5 V input only): 0 to +2.5 V ±2%												
	Output current monitor (12 to 24 V input): 0 to +5.0 V ±2%												-

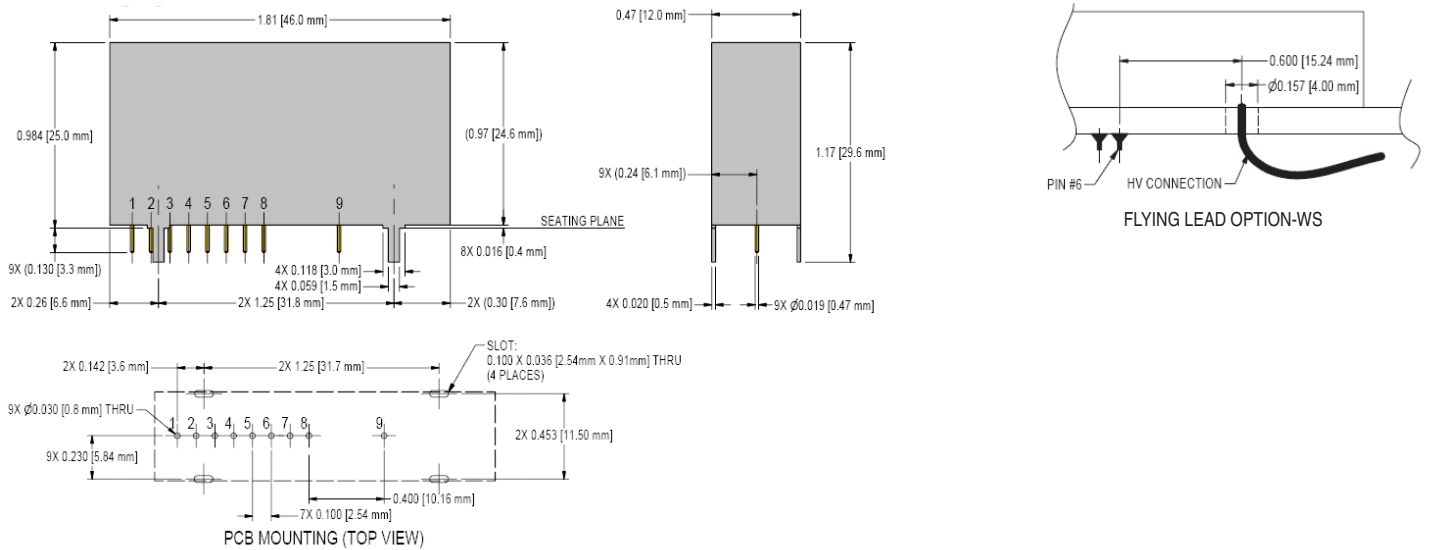

Note: Pins 7 and 8 are available for 2 kV to 3 kV units with enhanced interface option ONLY. Drawing views: third angle projections.

PHYSICAL SPECIFICATIONS	
Construction	Steel, tin-plated, thickness 0.5 mm (0.02") Insulation: fully potted in an epoxy resin
Volume	13.8 cc (0.84 in ³)
Weight	35 g (1.23 oz)
Tolerance	
Overall	±0.76 mm (0.0030")
Pin to Pin	±0.38 mm (0.015")
Tabs Location	±0.51 mm (0.020")
Tab to Tab	±0.25 mm (0.010")

Notes: 0.47 mm (0.019") round pins, length: 3 mm (0.12"), spacing: 2.54 mm (0.1")

PCB mounting through 4 mounting tabs: length: 5 mm (0.2"), width: 1.5 mm (0.059"), thickness: 0.5 mm (0.02")

Optional flying lead for HV output: coaxial cable (RG178), diameter: 2 mm (0.079"), length: 500 mm (19.685")

CONNECTIONS	
Pin	Function
1	POSITIVE POWER INPUT
2	POWER GROUND
3	SIGNAL GROUND
4	REMOTE ADJUST INPUT
5	REFERENCE VOLTAGE
6	VOLTAGE MONITOR
7	CURRENT MONITOR (available with -EI option ONLY)
8	ENABLE (available with -EI option ONLY)
9	HV OUTPUT


Note: Mounting tabs must be connected to ground.

ORDERING INFORMATION

Type	0 to 600 VDC Output	0.6 V
	0 to 1000 VDC Output	1 V
	0 to 1250 VDC Output	1.25 V
	0 to 1500 VDC Output	1.5 V
	0 to 2000 VDC Output	2 V
	0 to 2500 VDC Output	2.5 V
	0 to 3000 VDC Output	3 V
Input	5 VDC Nominal (2 to 3 kV Only)	5
	12 VDC Nominal	12
	15 VDC Nominal (600 V to 1.5 kV Only)	15
	24 VDC Nominal	24
Power	0.5 W Output	0.5
	0.8 W Output	0.8
	1 W Output	1
Case	Tin Steel Case	(Standard)
Polarity	Positive Output	-P
	Negative Output	-N
Option	Shielded Flying Lead for HV Output (600 V to 1.5 kV Only)	-WS
	Flying Lead for HV Output (2 to 3 kV Only)	-W
	Current Monitor/Enable Pin (2 to 3 kV Only)	-EI



RoHS COMPLIANT Non-RoHS compliant units are available. Please contact the factory for more information.

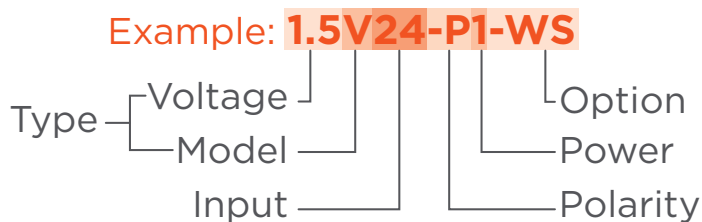

The V series is not available in all territories. Please contact Advanced Energy for details concerning sales in your area.



For international contact information, visit
advanced-energy.com.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Energy:

[1.25V12-P0.5](#) [1.25V24-P1](#) [1.5V15-N0.8](#) [1.5V12-N0.5](#) [2.5V12-P0.8](#) [0.6V24-N1](#) [1V15-N0.8](#) [1.5V24-P1](#) [3V5-N0.5-EI-W](#) [1.5V24-N1-WS](#) [1.5V12-P0.5-WS](#) [0.6V24-N1-WS](#) [0.6V15-N0.8](#) [3V12-P0.8](#) [0.6V12-N0.5](#) [2V24-P1-EI](#) [1V24-P1](#) [2.5V24-N1](#) [2V24-P1-EI-W](#) [1.5V12-P0.5](#) [2.5V24-P1](#) [1.5V24-N1](#) [3V12-P0.8-EI-W](#) [0.6V24-P1](#) [1V12-P0.5](#) [3V24-P1](#) [2V24-N1-EI](#) [1.5V15-P0.8](#) [1.25V24-N1-WS](#) [2V24-P1](#) [3V5-P0.5](#) [3V24-N1](#) [3V5-P0.5-EI-W](#) [1.5V12-N0.5-WS](#) [1V12-P0.5-WS](#) [2V12-N0.8](#) [1.25V12-P0.5-WS](#) [1V15-P0.8-WS](#) [2V12-P0.8](#) [3V5-N0.5](#) [0.6V24-P1-WS](#) [1.25V12-N0.5](#) [1V24-P1-WS](#) [1V24-N1](#) [1V12-N0.5](#) [1V15-P0.8](#) [1.25V15-N0.8](#) [0.6V15-P0.8](#) [3V24-P1-W](#) [1.5V24-P1-WS](#) [3V5-P0.5-EI](#) [1.25V15-P0.8](#)