





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.26	阿树

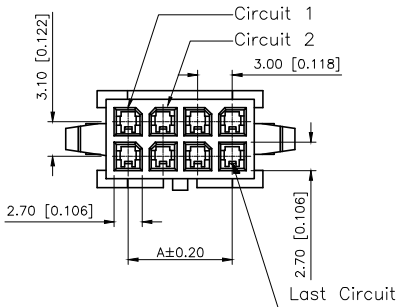


2x7PIN



2x6PIN



2x8PIN



2x5PIN




2x9PIN



2x4PIN



2x10PIN



2x3PIN



2x11PIN



2x2PIN



2x12PIN



2x1PIN

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:5A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing: ≤20mΩ

PART NO.:

X3025 H F-2xXX G-N2 XX
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:H-HSG
③Category:F-Female Housing
④Row No.Pin No:2xXX-2x01P~2x12P
⑤Special No:G-With Ears
⑥Material:N2-PA66 UL94V-0
⑦Color:Blank-Natural Color

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2x01	/	4.00	2x07	18.00	22.00
2x02	3.00	7.00	2x08	21.00	25.00
2x03	6.00	10.00	2x09	24.00	28.00
2x04	9.00	13.00	2x10	27.00	31.00
2x05	12.00	16.00	2x11	30.00	34.00
2x06	15.00	19.00	2x12	33.00	37.00

X3025HF-2xXXG-N2	Nylon 66 94V-2	X3025TM	X3025HM	With Ears
PART NO	Material	Suitable XKB Terminal	Mates With XKB Housing	Note

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.00 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X3025HF-2xXXG-N2
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1