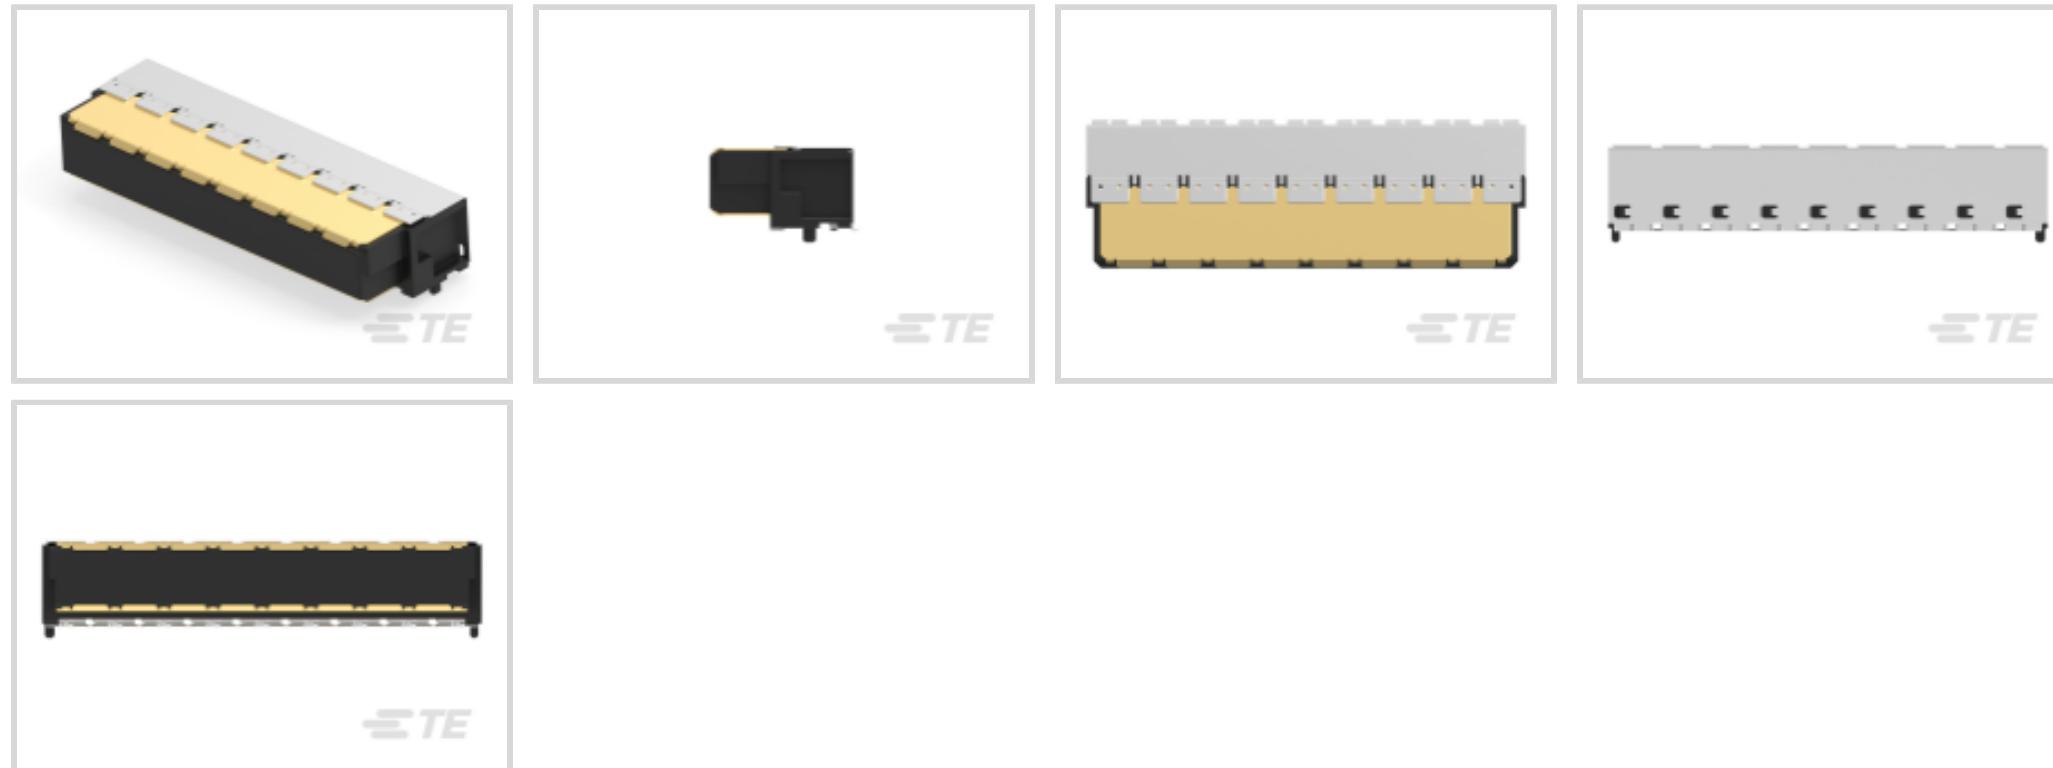


Connectors &gt; PCB Connectors &gt; PCB Headers &amp; Receptacles

PCB Connector Assembly Type: **PCB Mount Receptacle**PCB Mount Orientation: **Right Angle**Connector System: **Board-to-Board**Number of Positions: **50**Number of Rows: **2**

## Features

### Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Number of Columns	25
Number of Loaded Positions	50
Stackable	No
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Right Angle
Number of Positions	50
Number of Rows	2

### Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 Vrms
---------------------------------------	----------

Impedance	100 Ω
-----------	-------

#### Signal Characteristics

Data Rate	25 Gb/s
-----------	---------

#### Body Features

Primary Product Color	Black
-----------------------	-------

#### Contact Features

PCB Contact Termination Area Plating Material Thickness	2 – 6 µm[78.74 – 236.22 µin]
---	------------------------------

Contact Layout	Matrix
----------------	--------

Contact Shape & Form	Dual Beam
----------------------	-----------

PCB Contact Termination Area Plating Material	Tin
---	-----

Contact Base Material	Copper Alloy
-----------------------	--------------

Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------

Contact Type	Receptacle
--------------	------------

Contact Current Rating (Max)	1 A
------------------------------	-----

#### Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

#### Mechanical Attachment

Mounting Alignment Feature Length	.7 mm[.027 in]
-----------------------------------	----------------

PCB Mount Alignment Type	Locating Posts
--------------------------	----------------

Mating Alignment	With
------------------	------

Mating Alignment Type	Polarization Rib
-----------------------	------------------

PCB Mount Retention	Without
---------------------	---------

PCB Mount Alignment	With
---------------------	------

Connector Mounting Type	Board Mount
-------------------------	-------------

#### Housing Features

Mating Entry Location	Side
-----------------------	------

Centerline (Pitch)	1 mm[.039 in]
--------------------	---------------

Housing Material	LCP
------------------	-----

#### Dimensions

Connector Length	27 mm[1.063 in]
------------------	-----------------

Connector Height	5.25 mm[.207 in]
------------------	------------------

Connector Width	8.8 mm[.346 in]
Profile Height from PCB	5.25 mm
Row-to-Row Spacing	1.5 mm[.059 in]

### Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

### Operation/Application

Shielded	Yes
Circuit Application	Power, Signal & High Speed Data

### Industry Standards

Compatible With Agency/Standards Products	DIN, UL
Compatible With Approved Standards Products	UL
Industry Standard	IEC
UL Flammability Rating	UL 94V-0

### Packaging Features

Packaging Reel Diameter	330 mm[12.99 in]
Packaging Quantity	500
Packaging Method	Tape & Reel

### Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts



## Also in the Series | ERNI MicroSpeed



## Customers Also Bought

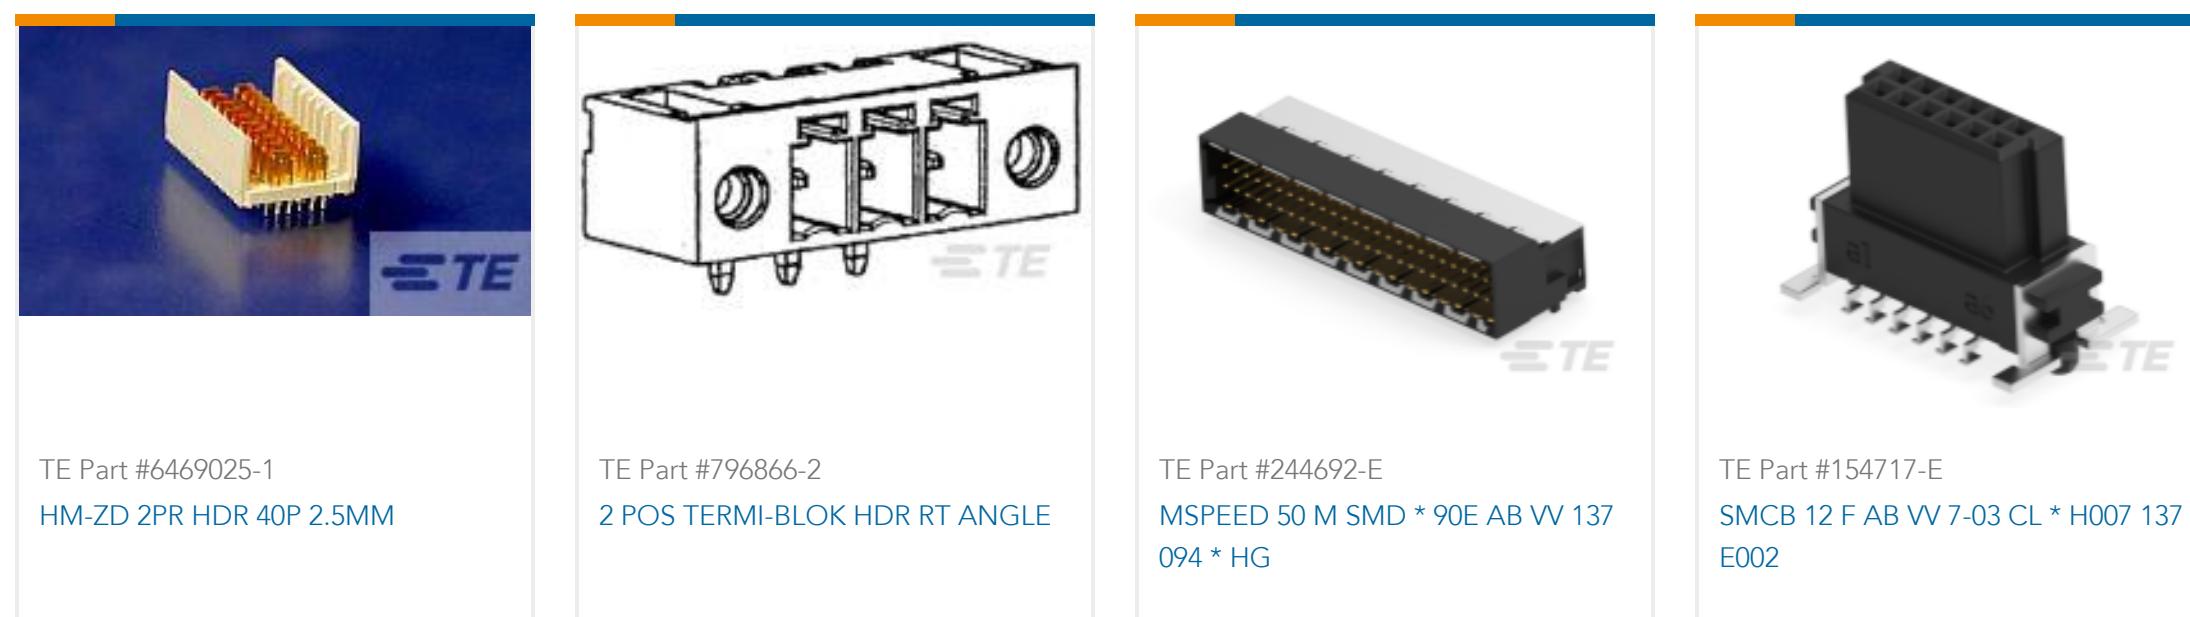



## Documents

### Product Drawings

[MSPEED 50 F SMD \\* 90E AB VV 137 094 \\*\\*](#)

English

[MSPEED 50 F SMD \\* 90E AB VV 137 094 \\*\\*](#)

German

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_244676-E\\_1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_244676-E\\_1.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_244676-E\\_1.2d\\_dxf.zip](#)

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.