
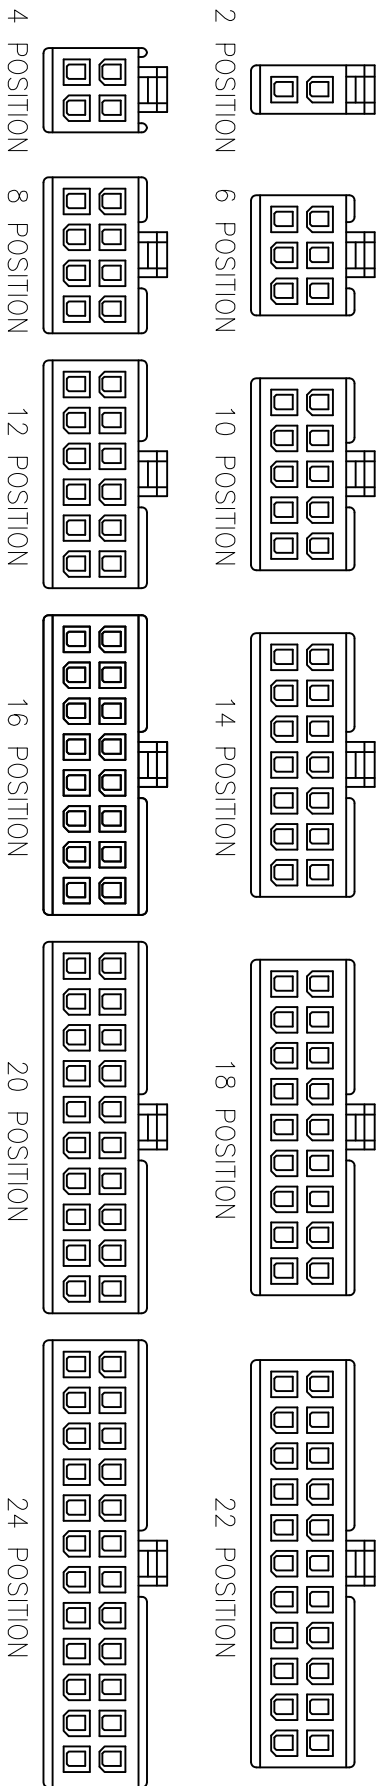
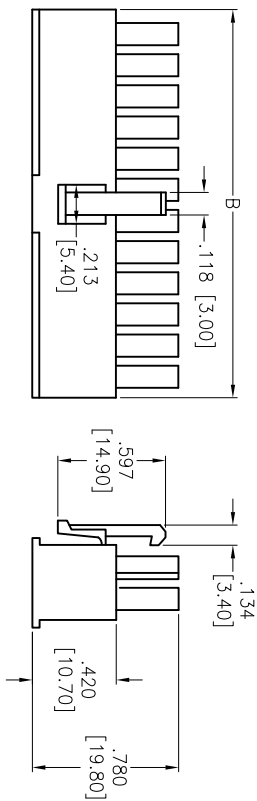


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/18/06	
A		REDRAWN	10/17/11	

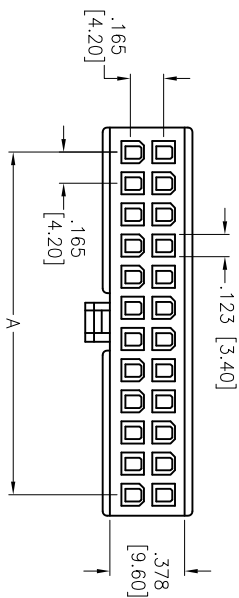

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Electrical:

Operating voltage: 600 VAC max

Current rating: / Circuit (See Chart)

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

WIRE SIZE	CIRCUITS			
AWG	2	4~6	8~10	12~24
18	9 A	8 A	7 A	6 A
20	7 A	6 A	5 A	5 A
22	5 A	4 A	4 A	4 A
24	4 A	3 A	3 A	3 A

Positions: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24
A = .165 [4.20] X No. of Spaces per row
B = .165 [4.20] X No. of Positions per row+ .055 [1.40]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

WIRE TO WIRE CONNECTOR HOUSING
FEMALE, 4.2MM PITCH

APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DMH-XX	A
REF:	S00123T	SCALE: NTS
SHEET	1 OF 1	