


# QTCU 2,5-PE - Ground terminal

3206555

<https://www.phoenixcontact.com/us/products/3206555>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ground terminal, connection method: Quick connection, cross section: 0.5 mm<sup>2</sup> - 2.5 mm<sup>2</sup>, connection method: Screw connection, cross section: 0.14 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, color: green-yellow

## Your advantages

- Same shape and pitch as the feed-through terminal blocks
- Contact is made free from mechanical and electrical errors by simply snapping onto the DIN rail
- All the requirements of standard IEC 60947-7-2 are met

## Commercial data

Item number	3206555
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE03
Product key	BE3129
Catalog page	Page 264 (C-1-2019)
GTIN	4046356057738
Weight per piece (including packing)	14.09 g
Weight per piece (excluding packing)	14.09 g
Customs tariff number	85369010
Country of origin	CN

# QTCU 2,5-PE - Ground terminal



3206555

<https://www.phoenixcontact.com/us/products/3206555>

## Technical data

### Product properties

Product type	Ground terminal block
Number of connections	2
Number of rows	1

### Data management status

Article revision	13
------------------	----

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	0.77 W

### Connection data

Grounding foot	Yes
Number of connections per level	2
Frequency of connections with the same cross section	100
Nominal cross section	2.5 mm <sup>2</sup>
Note	Please observe the current carrying capacity of the DIN rails.
Material wire insulation	PVC / PE
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross section AWG	20 ... 14 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	20 ... 14 (converted acc. to IEC)
Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	9 mm
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section AWG	26 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>

### Ex data

#### Rated data (ATEX/IECEX)

Identification	⊕ II 2 GD Ex eb IIC Gb
Operating temperature range	-45 °C ... 90 °C

# QTCU 2,5-PE - Ground terminal



3206555

<https://www.phoenixcontact.com/us/products/3206555>

Ex-certified accessories	3206597 D-QTCU 2,5
	1204517 SZF 1-0,6X3,5
	3022276 CLIPFIX 35-5
	3022218 CLIPFIX 35
output	(Permanent)

## Ex connection data Fast connection

Nominal cross section	2.5 mm <sup>2</sup>
Rated cross section AWG	14
Connection capacity rigid	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Connection capacity AWG	20 ... 14
Connection capacity flexible	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Connection capacity AWG	20 ... 14
Frequency of connections with the same cross section	100

## Ex connection data Screw connection

Stripping length	9 mm
Torque range	0.6 Nm ... 0.8 Nm
Nominal cross section	2.5 mm <sup>2</sup>
Rated cross section AWG	14
Connection capacity rigid	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Connection capacity AWG	26 ... 10
Connection capacity flexible	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Connection capacity AWG	26 ... 12

## Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	62.6 mm
Depth on NS 35/7,5	42.8 mm
Depth on NS 35/15	50.3 mm

## Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed

# QTCU 2,5-PE - Ground terminal



3206555

<https://www.phoenixcontact.com/us/products/3206555>

Smoke gas toxicity NFPA 130 (SMP 800C)	passed
--	--------

## Cable/line

Wire diameter incl. insulation	3.8 mm
--------------------------------	--------

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-2
	IEC 60947-7-2

## Mounting

Mounting type	NS 35/7,5
	NS 35/15
Thread type	()

# QTCU 2,5-PE - Ground terminal


3206555

<https://www.phoenixcontact.com/us/products/3206555>



## Drawings

Circuit diagram

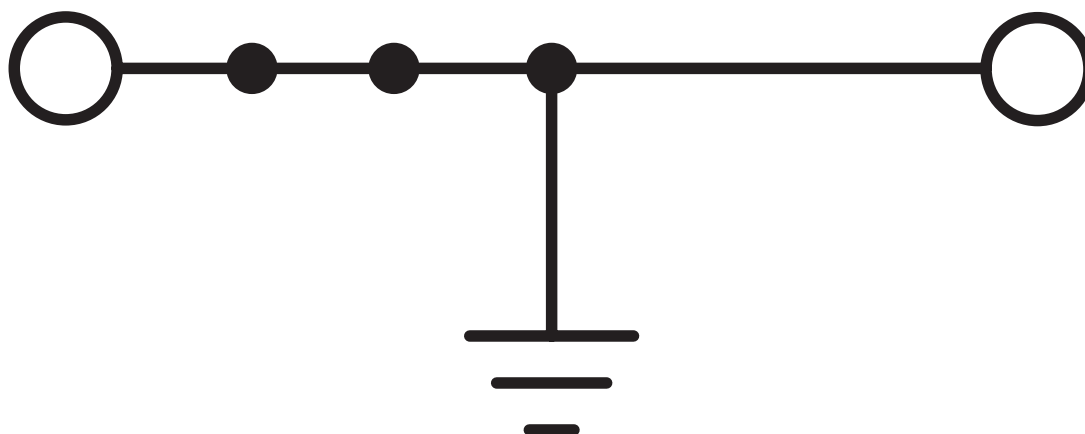

# QTCU 2,5-PE - Ground terminal



3206555

<https://www.phoenixcontact.com/us/products/3206555>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3206555>

### DNV

Approval ID: TAE000014H



### cULus Recognized

Approval ID: E60425

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Use group B				
Screw connection	-	-	26 - 10	-
Fast connection	-	-	20 - 14	-
Use group C				
Screw connection	-	-	26 - 10	-
Fast connection	-	-	20 - 14	-



### LR

Approval ID: LR2002130TA



### NK

Approval ID: 09 ME 139

### ABS

Approval ID: 22-2196825-PDA



### EAC Ex

Approval ID: RU C-DE.HA91.B.00066



### IEC Ex

Approval ID: IECExKIWA19.0011U



### ATEX

Approval ID: KIWA19ATEX0019U



### CCC

Approval ID: 2020322313000625

# QTCU 2,5-PE - Ground terminal

3206555

<https://www.phoenixcontact.com/us/products/3206555>



**UKCA-EX**

Approval ID: CSAE 22UKEX1429U

# QTCU 2,5-PE - Ground terminal



3206555

<https://www.phoenixcontact.com/us/products/3206555>

## Classifications

### ECLASS

ECLASS-11.0	27141141
ECLASS-13.0	27250202

### ETIM

ETIM 9.0	EC000901
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# QTCU 2,5-PE - Ground terminal



3206555

<https://www.phoenixcontact.com/us/products/3206555>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	38eb3510-ac39-409f-b020-0ffb2579ebf4

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)