



**Part Number :** [1552110045](#)


**Product Description :** Flamar Sensor Cable, PVC Jacket, Braided Shielding Overall, 5 Circuits, 0.34mm<sup>2</sup> with Green-Yellow Ground / 22 AWG with Green-Yellow Ground, 6.10mm (.240") Diameter, 1000.0m (3280.83') Length, Yellow

**Series Number :** 155211

**Status :** Obsolete

**Product Category :** Industrial Cable

**Engineering Number :** 1X1000M

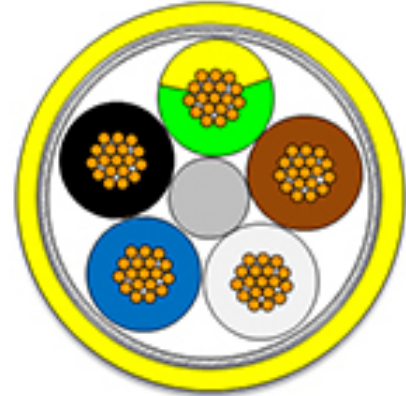

---

## Documents & Resources

---

### Product Environment Compliance

#### Compliance

China RoHS	Not Reviewed
EU ELV	Not Reviewed
Low-Halogen Status	Not Reviewed
REACH SVHC	Not Reviewed
EU RoHS	Not Reviewed

#### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Obsolete
Category	Industrial Cable
Series	155211
Description	Flamar Sensor Cable, PVC Jacket, Braided Shielding Overall, 5 Circuits, 0.34mm <sup>2</sup> with Green-Yellow Ground / 22 AWG with Green-Yellow Ground, 6.10mm (.240") Diameter, 1000.0m (3280.83') Length, Yellow
Geographic Area	Global
Product Family	Flamar Standard and Custom Cables for Industrial Automation
Product Name	Flamar,Signal and Control
UPC	889056456517

### Electrical

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	300V

### Physical

Bending Radius - Minimum	> 15xOD
Cable Length	1000.0m
Circuits (Loaded)	5
Color - Cable Jacket	Yellow
Insulation	TPE
Material - Outer Jacket	PVC
Net Weight	0.010/g
Outer Jacket Diameter	6.10mm
Packaging Type	Reel
Temperature Range - Operating	+5° to +80°C
Wire/Cable Type	UL AWM 2464 / CSA
Wire Size (AWG)	22
Wire Size mm <sup>2</sup>	0.34